



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.20 GHz, Intel Xeon Platinum 8276L)

SPECrate®2017\_int\_base = 625

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

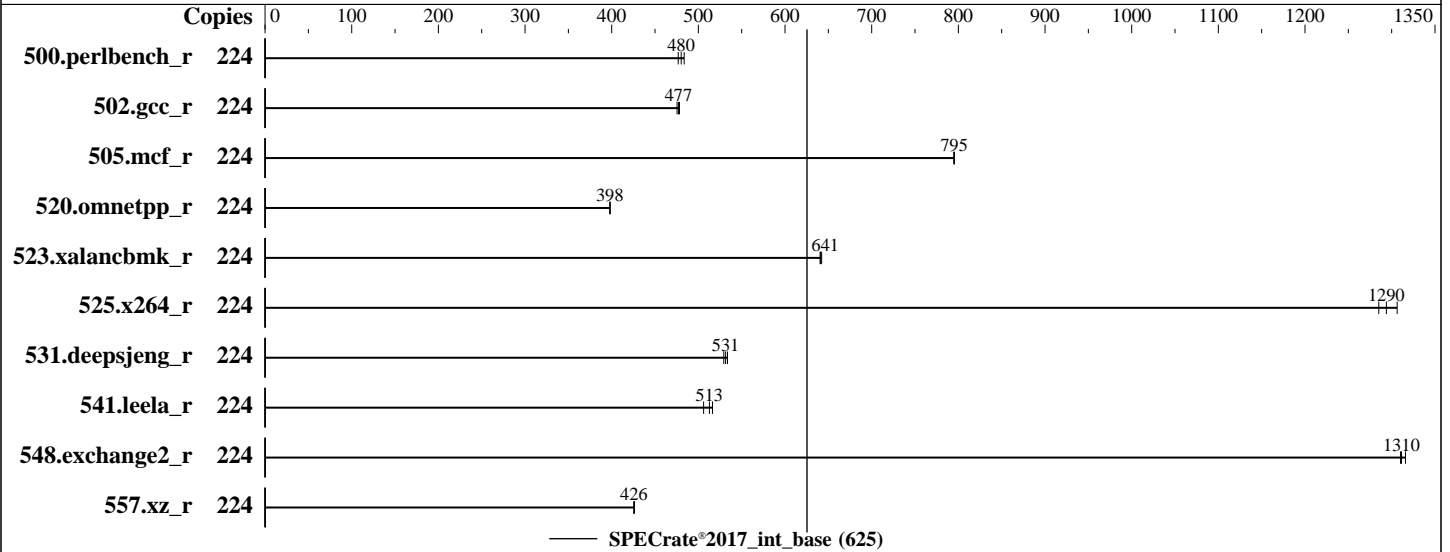

### Hardware

CPU Name: Intel Xeon Platinum 8276L  
 Max MHz: 4000  
 Nominal: 2200  
 Enabled: 112 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 38.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 800 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86\_64)  
 Kernel 4.12.14-94.41-default  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Lenovo BIOS Version TEE142E 2.30 released Aug-2019  
 tested as TEE141E 2.30 Jul-2019  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: --



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.20 GHz, Intel Xeon Platinum 8276L)

SPECrate®2017\_int\_base = 625

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Sep-2019  
Hardware Availability: Apr-2019  
Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	224	737	484	<b>743</b>	<b>480</b>	748	477							
502.gcc_r	224	667	475	663	478	<b>665</b>	<b>477</b>							
505.mcf_r	224	455	795	455	795	<b>455</b>	<b>795</b>							
520.omnetpp_r	224	<b>739</b>	<b>398</b>	739	398	738	398							
523.xalancbmk_r	224	369	640	368	642	<b>369</b>	<b>641</b>							
525.x264_r	224	305	1290	300	1310	<b>303</b>	<b>1290</b>							
531.deepsjeng_r	224	485	529	<b>483</b>	<b>531</b>	481	534							
541.leela_r	224	718	516	<b>723</b>	<b>513</b>	733	506							
548.exchange2_r	224	448	1310	<b>448</b>	<b>1310</b>	446	1320							
557.xz_r	224	<b>568</b>	<b>426</b>	568	426	567	426							

SPECrate®2017\_int\_base = 625

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.0.5-ic19.0u4/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 625

ThinkSystem SR850  
(2.20 GHz, Intel Xeon Platinum 8276L)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** May-2019

### General Notes (Continued)

is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance  
DCU Streamer Prefetcher set to Disable  
SNC set to Enable  
Sysinfo program /home/cpu2017-1.0.5-ic19.0u4/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-9o83 Thu Sep 12 01:59:38 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8276L CPU @ 2.20GHz
 4 "physical id"s (chips)
 224 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 28
  siblings  : 56
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
 28 29 30
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
 28 29 30
  physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
 28 29 30
  physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
 28 29 30
```

```
From lscpu:
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               224
On-line CPU(s) list:  0-223
Thread(s) per core:   2
Core(s) per socket:   28
Socket(s):            4
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 625

ThinkSystem SR850  
(2.20 GHz, Intel Xeon Platinum 8276L)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

```

NUMA node(s):      8
Vendor ID:         GenuineIntel
CPU family:        6
Model:             85
Model name:        Intel(R) Xeon(R) Platinum 8276L CPU @ 2.20GHz
Stepping:          6
CPU MHz:           2200.000
CPU max MHz:       4000.0000
CPU min MHz:       1000.0000
BogoMIPS:          4400.00
Virtualization:    VT-x
L1d cache:         32K
L1i cache:         32K
L2 cache:          1024K
L3 cache:          39424K
NUMA node0 CPU(s): 0-3,7-9,14-17,21-23,112-115,119-121,126-129,133-135
NUMA node1 CPU(s): 4-6,10-13,18-20,24-27,116-118,122-125,130-132,136-139
NUMA node2 CPU(s): 28-31,35-37,42-45,49-51,140-143,147-149,154-157,161-163
NUMA node3 CPU(s): 32-34,38-41,46-48,52-55,144-146,150-153,158-160,164-167
NUMA node4 CPU(s): 56-59,63-65,70-73,77-79,168-171,175-177,182-185,189-191
NUMA node5 CPU(s): 60-62,66-69,74-76,80-83,172-174,178-181,186-188,192-195
NUMA node6 CPU(s): 84-87,91-93,98-101,105-107,196-199,203-205,210-213,217-219
NUMA node7 CPU(s): 88-90,94-97,102-104,108-111,200-202,206-209,214-216,220-223
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln
pts pku ospke avx512_vnni flush_l1d arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 112 113 114 115 119 120 121 126 127 128
129 133 134 135
node 0 size: 193129 MB
node 0 free: 192743 MB
node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 116 117 118 122 123 124 125 130 131
132 136 137 138 139

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 625

ThinkSystem SR850  
(2.20 GHz, Intel Xeon Platinum 8276L)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

### Platform Notes (Continued)

```

node 1 size: 193525 MB
node 1 free: 192939 MB
node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 140 141 142 143 147 148 149 154
155 156 157 161 162 163
node 2 size: 193496 MB
node 2 free: 193261 MB
node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 144 145 146 150 151 152 153 158
159 160 164 165 166 167
node 3 size: 193525 MB
node 3 free: 193296 MB
node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79 168 169 170 171 175 176 177 182
183 184 185 189 190 191
node 4 size: 193525 MB
node 4 free: 193303 MB
node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83 172 173 174 178 179 180 181 186
187 188 192 193 194 195
node 5 size: 193525 MB
node 5 free: 193309 MB
node 6 cpus: 84 85 86 87 91 92 93 98 99 100 101 105 106 107 196 197 198 199 203 204 205
210 211 212 213 217 218 219
node 6 size: 193525 MB
node 6 free: 193321 MB
node 7 cpus: 88 89 90 94 95 96 97 102 103 104 108 109 110 111 200 201 202 206 207 208
209 214 215 216 220 221 222 223
node 7 size: 193522 MB
node 7 free: 193316 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10  11  21  21  21  21  31  31
  1:  11  10  21  21  21  21  31  31
  2:  21  21  10  11  31  31  21  21
  3:  21  21  11  10  31  31  21  21
  4:  21  21  31  31  10  11  21  21
  5:  21  21  31  31  11  10  21  21
  6:  31  31  21  21  21  21  10  11
  7:  31  31  21  21  21  21  11  10

```

From /proc/meminfo

```

MemTotal:      1584923096 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/\*release\* /etc/\*version\*

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 625

ThinkSystem SR850  
(2.20 GHz, Intel Xeon Platinum 8276L)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Sep-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

# This file is deprecated and will be removed in a future service pack or release.  
# Please check /etc/os-release for details about this release.

```
os-release:
NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"
```

```
uname -a:
Linux linux-9o83 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW
```

run-level 3 Sep 12 01:55

```
SPEC is set to: /home/cpu2017-1.0.5-ic19.0u4
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2       btrfs    744G  134G  609G  19% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Lenovo -[TEE141E-2.30]- 07/02/2019
Memory:
48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====
C          | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
          | 525.x264_r(base) 557.xz_r(base)
-----
```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 625

ThinkSystem SR850  
(2.20 GHz, Intel Xeon Platinum 8276L)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

### Compiler Version Notes (Continued)

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```

=====
C++      | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
         | 541.leela_r(base)
=====

```

```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran | 548.exchange2_r(base)
=====

```

```

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

```

### Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

### Base Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate®2017\_int\_base = 625

ThinkSystem SR850  
(2.20 GHz, Intel Xeon Platinum 8276L)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Sep-2019

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Apr-2019

**Tested by:** Lenovo Global Technology

**Software Availability:** May-2019

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-D.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-D.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-09-11 13:59:37-0400.

Report generated on 2019-10-01 14:21:41 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-01.