



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8260L, 2.40GHz

SPECrate®2017_fp_base = 488

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

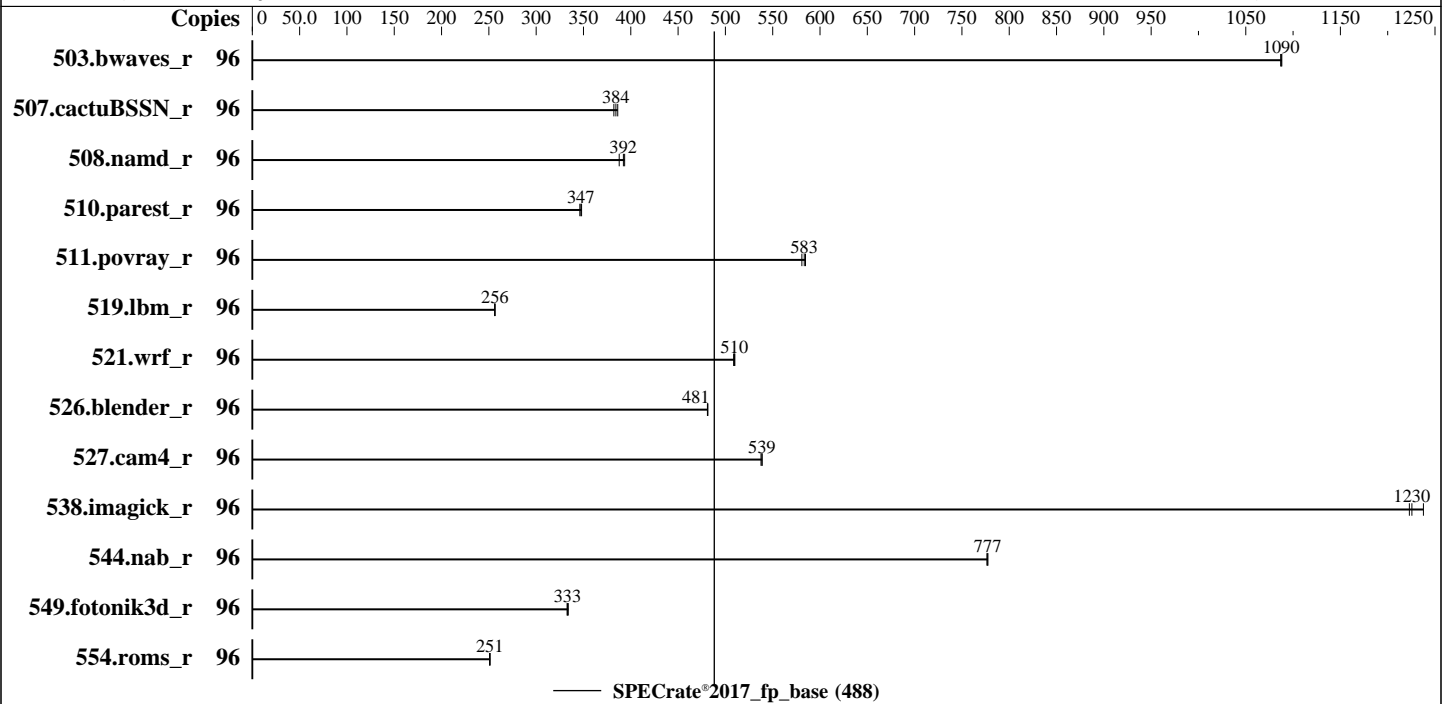

Hardware

CPU Name: Intel Xeon Platinum 8260L
 Max MHz: 3900
 Nominal: 2400
 Enabled: 96 cores, 4 chips
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 35.75 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x SATA M.2 SSD, 480 GB
 Other: None

Software

OS: SUSE Linux Enterprise Server 15
 4.12.14-25.28-default
 Compiler: C/C++: Version 19.0.0.117 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 19.0.0.117 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Fujitsu BIOS Version V5.0.0.14 R1.8.0 for D3753-C1x. Released Jun-2019
 tested as V5.0.0.14 R1.3.0 for D3753-C1x Mar-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: --



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8260L, 2.40GHz

SPECrate®2017_fp_base = 488

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	886	1090	<u>885</u>	<u>1090</u>	885	1090							
507.cactuBSSN_r	96	318	382	<u>316</u>	<u>384</u>	315	386							
508.namd_r	96	232	394	235	388	<u>233</u>	<u>392</u>							
510.parest_r	96	722	348	726	346	<u>723</u>	<u>347</u>							
511.povray_r	96	383	585	386	581	<u>384</u>	<u>583</u>							
519.lbm_r	96	394	257	<u>395</u>	<u>256</u>	395	256							
521.wrf_r	96	423	509	<u>422</u>	<u>510</u>	422	510							
526.blender_r	96	<u>304</u>	<u>481</u>	304	481	304	481							
527.cam4_r	96	312	539	<u>312</u>	<u>539</u>	312	538							
538.imagick_r	96	195	1220	<u>195</u>	<u>1230</u>	193	1240							
544.nab_r	96	<u>208</u>	<u>777</u>	208	777	208	776							
549.fotonik3d_r	96	1125	333	<u>1123</u>	<u>333</u>	1120	334							
554.roms_r	96	608	251	607	251	<u>608</u>	<u>251</u>							

SPECrate®2017_fp_base = 488

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-191
Process tuning settings:
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-fp/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8260L, 2.40GHz

SPECrate®2017_fp_base = 488

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

General Notes (Continued)

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Fan Control = Full
HWPM = Native Mode with no legacy
Hyper Threading = Disabled
LLC Prefetcher = Disabled
Local/Remote Threshold = Disable
Patrol Scrub = Disabled
Uncore Frequency Override = Power Balanced
WR CRC feature Control = Disabled
XPT Prefetch = Disabled
Sysinfo program /home/Benchmark/speccpu2017-fp/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on RX4770M5 Wed May 29 08:21:50 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8260L CPU @ 2.40GHz
 4 "physical id"s (chips)
 96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings : 24
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
physical 3: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
```

From lscpu:

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 96

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8260L, 2.40GHz

SPECrate®2017_fp_base = 488

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Platform Notes (Continued)

```

On-line CPU(s) list: 0-95
Thread(s) per core: 1
Core(s) per socket: 24
Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8260L CPU @ 2.40GHz
Stepping: 6
CPU MHz: 2400.000
CPU max MHz: 3900.0000
CPU min MHz: 1000.0000
BogoMIPS: 4800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0-3,7-9,13-15,19,20
NUMA node1 CPU(s): 4-6,10-12,16-18,21-23
NUMA node2 CPU(s): 24-27,31,32,36-38,42-44
NUMA node3 CPU(s): 28-30,33-35,39-41,45-47
NUMA node4 CPU(s): 48-51,55-57,61-63,67,68
NUMA node5 CPU(s): 52-54,58-60,64-66,69-71
NUMA node6 CPU(s): 72-75,79,80,84-86,90-92
NUMA node7 CPU(s): 76-78,81-83,87-89,93-95
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpelt rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnmi
flush_lld arch_capabilities

```

/proc/cpuinfo cache data
cache size : 36608 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 7 8 9 13 14 15 19 20

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8260L, 2.40GHz

SPECrate®2017_fp_base = 488

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Platform Notes (Continued)

```

node 0 size: 191962 MB
node 0 free: 185886 MB
node 1 cpus: 4 5 6 10 11 12 16 17 18 21 22 23
node 1 size: 193533 MB
node 1 free: 193301 MB
node 2 cpus: 24 25 26 27 31 32 36 37 38 42 43 44
node 2 size: 193533 MB
node 2 free: 193338 MB
node 3 cpus: 28 29 30 33 34 35 39 40 41 45 46 47
node 3 size: 193533 MB
node 3 free: 193304 MB
node 4 cpus: 48 49 50 51 55 56 57 61 62 63 67 68
node 4 size: 193533 MB
node 4 free: 193356 MB
node 5 cpus: 52 53 54 58 59 60 64 65 66 69 70 71
node 5 size: 193504 MB
node 5 free: 193324 MB
node 6 cpus: 72 73 74 75 79 80 84 85 86 90 91 92
node 6 size: 193533 MB
node 6 free: 192547 MB
node 7 cpus: 76 77 78 81 82 83 87 88 89 93 94 95
node 7 size: 193361 MB
node 7 free: 193162 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 11 21 21 21 21 21 21
  1: 11 10 21 21 21 21 21 21
  2: 21 21 10 11 21 21 21 21
  3: 21 21 11 10 21 21 21 21
  4: 21 21 21 21 10 11 21 21
  5: 21 21 21 21 11 10 21 21
  6: 21 21 21 21 21 21 10 11
  7: 21 21 21 21 21 21 11 10

```

```

From /proc/meminfo
MemTotal:      1583611612 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8260L, 2.40GHz

SPECrate®2017_fp_base = 488

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Platform Notes (Continued)

```
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"
```

```
uname -a:
Linux RX4770M5 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB
filling
```

```
run-level 3 May 29 08:19
```

```
SPEC is set to: /home/Benchmark/speccpu2017-fp
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda5       xfs   343G   29G  314G   9% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS FUJITSU // American Megatrends Inc. V5.0.0.14 R1.3.0 for D3753-C1x
03/15/2019
```

```
Memory:
48x Micron 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933, configured at 2934
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
C++ | 508.namd_r(base) 510.parest_r(base)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8260L, 2.40GHz

SPECrate®2017_fp_base = 488

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8260L,
2.40GHz

SPECrate®2017_fp_base = 488

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: May-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64  
507.cactuBSSN_r: -DSPEC_LP64  
508.namd_r: -DSPEC_LP64  
510.parest_r: -DSPEC_LP64  
511.povray_r: -DSPEC_LP64  
519.lbm_r: -DSPEC_LP64  
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian  
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char  
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG  
538.imagick_r: -DSPEC_LP64  
544.nab_r: -DSPEC_LP64  
549.fotonik3d_r: -DSPEC_LP64  
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8260L,
2.40GHz

SPECrate®2017_fp_base = 488

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-ffinite-math-only -qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -auto  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -auto  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -auto  
-nostandard-realloc-lhs -align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-05-28 19:21:49-0400.

Report generated on 2019-10-01 14:31:21 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-01.