



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8270, 2.70GHz

SPECrate®2017\_fp\_base = 530

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

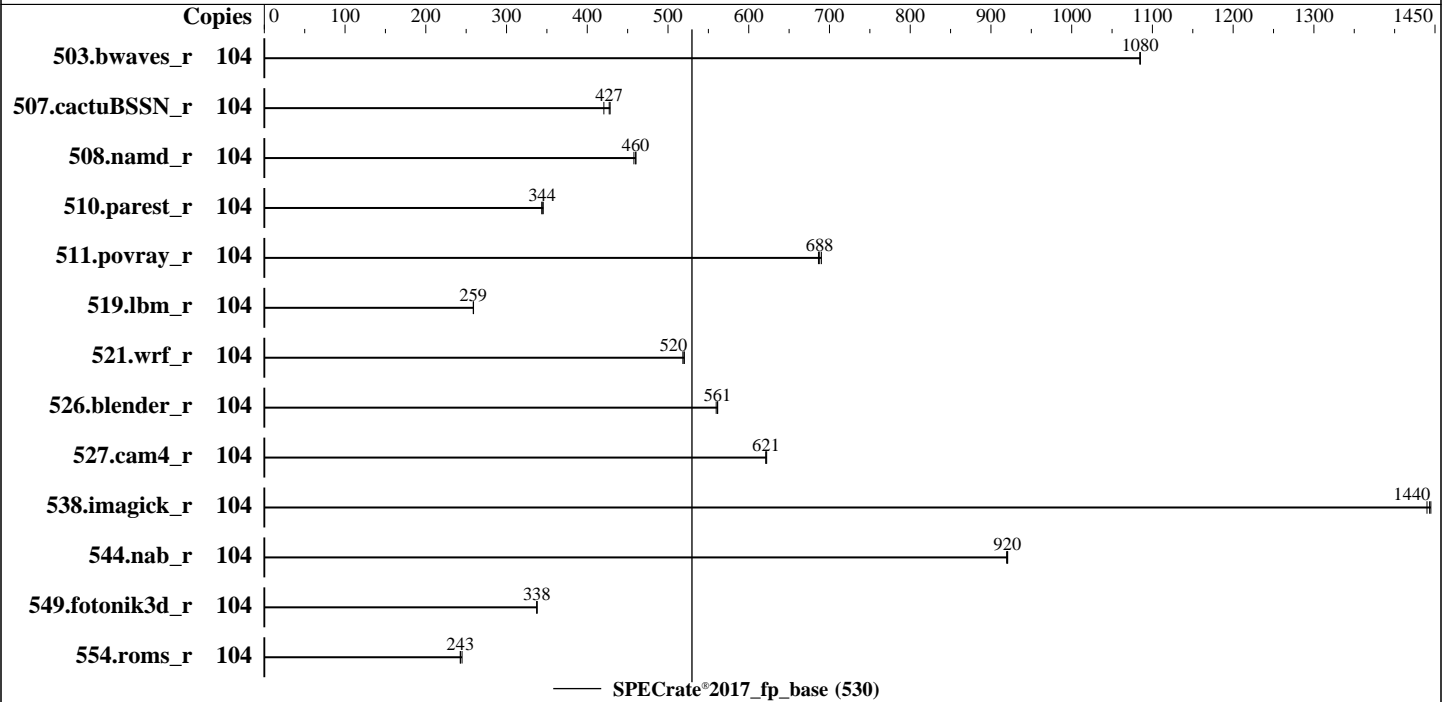

### Hardware

CPU Name: Intel Xeon Platinum 8270  
 Max MHz: 4000  
 Nominal: 2700  
 Enabled: 104 cores, 4 chips  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x SATA M.2 SSD, 480 GB  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15  
 4.12.14-25.28-default  
 Compiler: C/C++: Version 19.0.0.117 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 19.0.0.117 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Fujitsu BIOS Version V5.0.0.14 R1.8.0 for D3753-C1x. Released Jun-2019  
 tested as V5.0.0.14 R1.3.0 for D3753-C1x Mar-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: --



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8270, 2.70GHz

SPECrate®2017\_fp\_base = 530

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: May-2019  
Hardware Availability: Apr-2019  
Software Availability: Feb-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	104	962	1080	961	1080	<u>961</u>	<u>1080</u>							
507.cactuBSSN_r	104	<u>308</u>	<u>427</u>	307	428	313	421							
508.namd_r	104	215	460	<u>215</u>	<u>460</u>	216	458							
510.parest_r	104	787	345	<u>790</u>	<u>344</u>	792	344							
511.povray_r	104	<u>353</u>	<u>688</u>	354	686	352	690							
519.lbm_r	104	423	259	<u>423</u>	<u>259</u>	423	259							
521.wrf_r	104	448	520	449	518	<u>448</u>	<u>520</u>							
526.blender_r	104	282	562	<u>282</u>	<u>561</u>	283	560							
527.cam4_r	104	<u>293</u>	<u>621</u>	292	622	293	621							
538.imagick_r	104	<u>179</u>	<u>1440</u>	179	1440	180	1440							
544.nab_r	104	<u>190</u>	<u>920</u>	190	919	190	921							
549.fotonik3d_r	104	1200	338	1201	338	<u>1200</u>	<u>338</u>							
554.roms_r	104	<u>680</u>	<u>243</u>	675	245	681	243							

SPECrate®2017\_fp\_base = 530

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Kernel Boot Parameter set with : nohz\_full=1-207  
Process tuning settings:  
echo 10000000 > /proc/sys/kernel/sched\_min\_granularity\_ns

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/Benchmark/speccpu2017-fp/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8270, 2.70GHz

SPECrate®2017\_fp\_base = 530

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** May-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Feb-2019

### General Notes (Continued)

numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:  
Fan Control = Full  
HWPM = Native Mode with no legacy  
Hyper Threading = Disabled  
LLC Prefetcher = Disabled  
Local/Remote Threshold = Disable  
Patrol Scrub = Disabled  
Uncore Frequency Override = Power Balanced  
WR CRC feature Control = Disabled  
XPT Prefetch = Disabled  
Sysinfo program /home/Benchmark/speccpu2017-fp/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on RX4770M5 Fri May 31 03:11:59 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8270 CPU @ 2.70GHz  
4 "physical id"s (chips)  
104 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 26  
siblings : 26  
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29  
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29  
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29  
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

From lscpu:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8270, 2.70GHz

SPECrate®2017\_fp\_base = 530

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: May-2019  
Hardware Availability: Apr-2019  
Software Availability: Feb-2019

### Platform Notes (Continued)

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                104
On-line CPU(s) list:  0-103
Thread(s) per core:    1
Core(s) per socket:    26
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
Model:                 85
Model name:             Intel(R) Xeon(R) Platinum 8270 CPU @ 2.70GHz
Stepping:               6
CPU MHz:                2700.000
CPU max MHz:           4000.0000
CPU min MHz:           1000.0000
BogoMIPS:               5400.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              36608K
NUMA node0 CPU(s):     0-3,7-9,13-15,20-22
NUMA node1 CPU(s):     4-6,10-12,16-19,23-25
NUMA node2 CPU(s):     26-29,33-35,39-41,46-48
NUMA node3 CPU(s):     30-32,36-38,42-45,49-51
NUMA node4 CPU(s):     52-55,59-61,65-67,72-74
NUMA node5 CPU(s):     56-58,62-64,68-71,75-77
NUMA node6 CPU(s):     78-81,85-87,91-93,98-100
NUMA node7 CPU(s):     82-84,88-90,94-97,101-103
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni
flush_lld arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8270, 2.70GHz

SPECrate®2017\_fp\_base = 530

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** May-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Feb-2019

### Platform Notes (Continued)

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 7 8 9 13 14 15 20 21 22
node 0 size: 191962 MB
node 0 free: 185119 MB
node 1 cpus: 4 5 6 10 11 12 16 17 18 19 23 24 25
node 1 size: 193533 MB
node 1 free: 193317 MB
node 2 cpus: 26 27 28 29 33 34 35 39 40 41 46 47 48
node 2 size: 193533 MB
node 2 free: 193364 MB
node 3 cpus: 30 31 32 36 37 38 42 43 44 45 49 50 51
node 3 size: 193533 MB
node 3 free: 193358 MB
node 4 cpus: 52 53 54 55 59 60 61 65 66 67 72 73 74
node 4 size: 193533 MB
node 4 free: 193348 MB
node 5 cpus: 56 57 58 62 63 64 68 69 70 71 75 76 77
node 5 size: 193504 MB
node 5 free: 193332 MB
node 6 cpus: 78 79 80 81 85 86 87 91 92 93 98 99 100
node 6 size: 193533 MB
node 6 free: 193354 MB
node 7 cpus: 82 83 84 88 89 90 94 95 96 97 101 102 103
node 7 size: 193360 MB
node 7 free: 193206 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 11 21 21 21 21 21 21
  1: 11 10 21 21 21 21 21 21
  2: 21 21 10 11 21 21 21 21
  3: 21 21 11 10 21 21 21 21
  4: 21 21 21 21 10 11 21 21
  5: 21 21 21 21 11 10 21 21
  6: 21 21 21 21 21 21 10 11
  7: 21 21 21 21 21 21 11 10

```

```

From /proc/meminfo
MemTotal:      1583610028 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8270, 2.70GHz

SPECrate®2017\_fp\_base = 530

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** May-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Feb-2019

### Platform Notes (Continued)

```
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"
```

```
uname -a:
Linux RX4770M5 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB
filling
```

```
run-level 3 May 31 03:07
```

```
SPEC is set to: /home/Benchmark/speccpu2017-fp
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda5       xfs   343G   30G  314G   9% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS FUJITSU // American Megatrends Inc. V5.0.0.14 R1.3.0 for D3753-C1x
03/15/2019
```

```
Memory:
48x Micron 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933, configured at 2934
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====  
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)  
=====
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
=====
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8270, 2.70GHz

SPECrate®2017\_fp\_base = 530

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** May-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Feb-2019

### Compiler Version Notes (Continued)

C++ | 508.namd\_r(base) 510.parest\_r(base)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX4770 M5, Intel Xeon Platinum 8270, 2.70GHz

SPECrate®2017\_fp\_base = 530

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** May-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Feb-2019

## Compiler Version Notes (Continued)

Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64  
507.cactuBSSN_r: -DSPEC_LP64  
508.namd_r: -DSPEC_LP64  
510.parest_r: -DSPEC_LP64  
511.povray_r: -DSPEC_LP64  
519.lbm_r: -DSPEC_LP64  
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian  
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char  
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG  
538.imagick_r: -DSPEC_LP64  
544.nab_r: -DSPEC_LP64  
549.fotonik3d_r: -DSPEC_LP64  
554.roms_r: -DSPEC_LP64
```





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Platinum 8270, 2.70GHz

SPECrate®2017\_fp\_base = 530

SPECrate®2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** May-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Feb-2019

## Base Optimization Flags

### C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

### C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

### Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -auto  
-nostandard-realloc-lhs -align array32byte
```

### Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -auto  
-nostandard-realloc-lhs -align array32byte
```

### Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

### Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -auto  
-nostandard-realloc-lhs -align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-05-30 14:11:58-0400.

Report generated on 2019-10-15 14:40:38 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-15.