



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800E2, Intel Xeon Gold 6248,
2.50GHz

SPECrate®2017_fp_base = 444

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

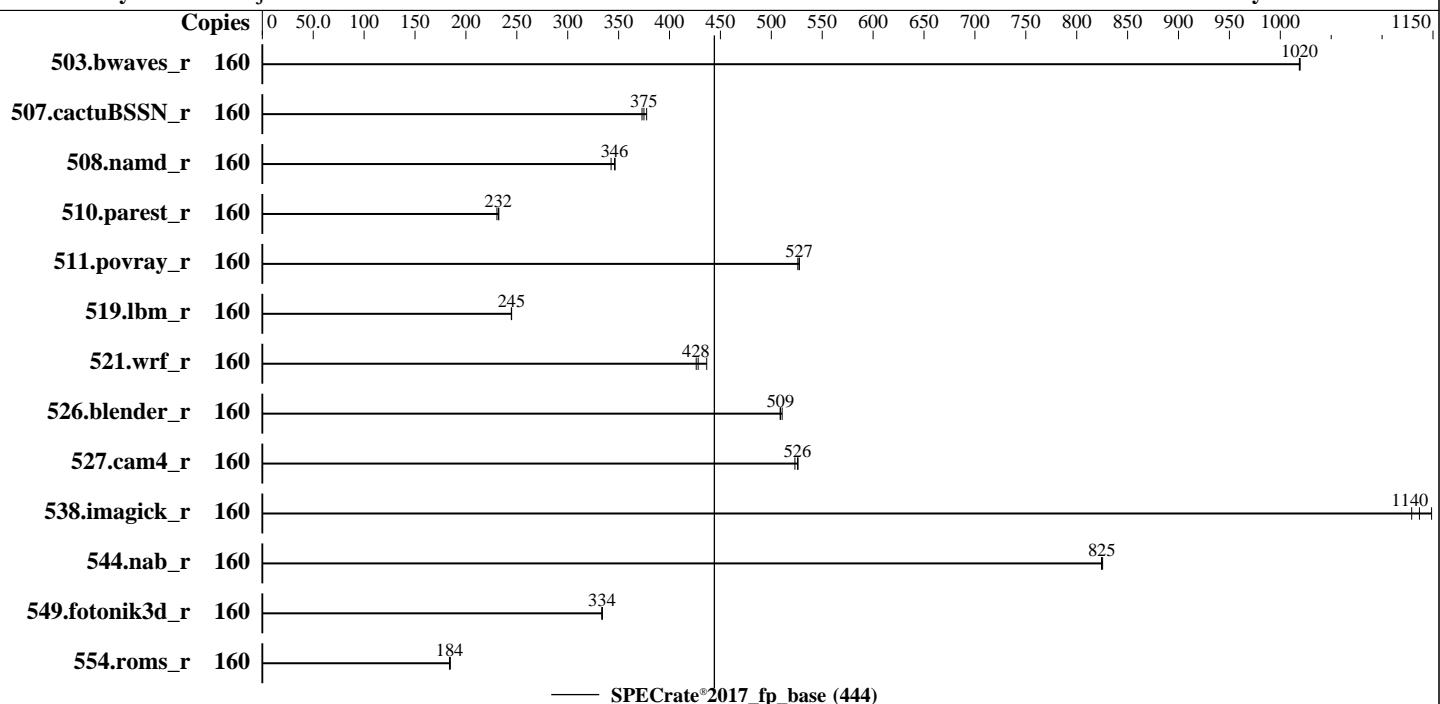

Hardware

CPU Name: Intel Xeon Gold 6248
 Max MHz: 3900
 Nominal: 2500
 Enabled: 80 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 27.5 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R, running at 2400)
 Storage: 1 x SAS HDD, 600GB, 10.5K RPM, SAS HDD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15
 4.12.14-25.28-default
 Compiler: C/C++: Version 19.0.0.117 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 19.0.0.117 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: PRIMEQUEST 3800E2 Unified Firmware
 Version PB19043, Released Jun-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: --



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800E2, Intel Xeon Gold 6248,
2.50GHz

SPECrate®2017_fp_base = 444

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	160	<u>1575</u>	<u>1020</u>	1575	1020	1574	1020							
507.cactusBSSN_r	160	543	373	<u>540</u>	<u>375</u>	537	378							
508.namd_r	160	439	347	444	343	<u>439</u>	<u>346</u>							
510.parest_r	160	<u>1805</u>	<u>232</u>	1802	232	1816	230							
511.povray_r	160	708	528	710	526	<u>708</u>	<u>527</u>							
519.lbm_r	160	<u>689</u>	<u>245</u>	689	245	689	245							
521.wrf_r	160	<u>837</u>	<u>428</u>	841	426	821	437							
526.blender_r	160	477	511	479	509	<u>479</u>	<u>509</u>							
527.cam4_r	160	<u>532</u>	<u>526</u>	535	523	532	526							
538.imagick_r	160	352	1130	346	1150	<u>350</u>	<u>1140</u>							
544.nab_r	160	326	825	<u>327</u>	<u>825</u>	327	824							
549.fotonik3d_r	160	1870	334	1866	334	<u>1868</u>	<u>334</u>							
554.roms_r	160	1377	185	1383	184	<u>1381</u>	<u>184</u>							

SPECrate®2017_fp_base = 444

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-159

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-fp/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800E2, Intel Xeon Gold 6248,
2.50GHz

SPECrate®2017_fp_base = 444

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

DCU Streamer Prefetcher = Disabled

DDR4 Write Data CRC Protection = Disabled

HWPMP Support = Native Mode with no legacy

LLC Dead Line Alloc = Disabled

Sub Numa Clustering = Enabled

Uncore Frequency Scaling = Disabled

UPI Link L0p = Disabled

Fan Control = Full

Sysinfo program /home/Benchmark/speccpu2017-fp/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-8r5c Thu Jun 20 19:04:09 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6248 CPU @ 2.50GHz

4 "physical id"s (chips)

160 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 20

siblings : 40

physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

physical 2: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

physical 3: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 160

On-line CPU(s) list: 0-159

Thread(s) per core: 2

Core(s) per socket: 20

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800E2, Intel Xeon Gold 6248,
2.50GHz

SPECrate®2017_fp_base = 444

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Date: Jun-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

Platform Notes (Continued)

```

Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6248 CPU @ 2.50GHz
Stepping: 6
CPU MHz: 2500.000
CPU max MHz: 3900.0000
CPU min MHz: 1000.0000
BogoMIPS: 5000.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 28160K
NUMA node0 CPU(s): 0-2,5,6,10-12,15,16,80-82,85,86,90-92,95,96
NUMA node1 CPU(s): 3,4,7-9,13,14,17-19,83,84,87-89,93,94,97-99
NUMA node2 CPU(s): 20-22,25,26,30-32,35,36,100-102,105,106,110-112,115,116
NUMA node3 CPU(s): 23,24,27-29,33,34,37-39,103,104,107-109,113,114,117-119
NUMA node4 CPU(s): 40-42,45,46,50-52,55,56,120-122,125,126,130-132,135,136
NUMA node5 CPU(s): 43,44,47-49,53,54,57-59,123,124,127-129,133,134,137-139
NUMA node6 CPU(s): 60-62,65,66,70-72,75,76,140-142,145,146,150-152,155,156
NUMA node7 CPU(s): 63,64,67-69,73,74,77-79,143,144,147-149,153,154,157-159
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpk rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
ospke avx512_vnni flush_l1d arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 28160 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 5 6 10 11 12 15 16 80 81 82 85 86 90 91 92 95 96
node 0 size: 192263 MB
node 0 free: 191826 MB
node 1 cpus: 3 4 7 8 9 13 14 17 18 19 83 84 87 88 89 93 94 97 98 99
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800E2, Intel Xeon Gold 6248,
2.50GHz

SPECrate®2017_fp_base = 444

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Date: Jun-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

Platform Notes (Continued)

```
node 1 size: 193523 MB
node 1 free: 193228 MB
node 2 cpus: 20 21 22 25 26 30 31 32 35 36 100 101 102 105 106 110 111 112 115 116
node 2 size: 193523 MB
node 2 free: 192825 MB
node 3 cpus: 23 24 27 28 29 33 34 37 38 39 103 104 107 108 109 113 114 117 118 119
node 3 size: 193523 MB
node 3 free: 193266 MB
node 4 cpus: 40 41 42 45 46 50 51 52 55 56 120 121 122 125 126 130 131 132 135 136
node 4 size: 193523 MB
node 4 free: 193247 MB
node 5 cpus: 43 44 47 48 49 53 54 57 58 59 123 124 127 128 129 133 134 137 138 139
node 5 size: 193523 MB
node 5 free: 193256 MB
node 6 cpus: 60 61 62 65 66 70 71 72 75 76 140 141 142 145 146 150 151 152 155 156
node 6 size: 193494 MB
node 6 free: 193280 MB
node 7 cpus: 63 64 67 68 69 73 74 77 78 79 143 144 147 148 149 153 154 157 158 159
node 7 size: 193320 MB
node 7 free: 193112 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  11  20  20  20  20  28  28
  1: 11  10  20  20  20  20  28  28
  2: 20  20  10  11  28  28  20  20
  3: 20  20  11  10  28  28  20  20
  4: 20  20  28  28  10  11  20  20
  5: 20  20  28  28  11  10  20  20
  6: 28  28  20  20  20  20  10  11
  7: 28  28  20  20  20  20  11  10
```

From /proc/meminfo

```
MemTotal:      1583818820 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
  NAME="SLES"
  VERSION="15"
  VERSION_ID="15"
  PRETTY_NAME="SUSE Linux Enterprise Server 15"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15"
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800E2, Intel Xeon Gold 6248,
2.50GHz

SPECrate®2017_fp_base = 444

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Date: Jun-2019

Test Sponsor: Fujitsu

Hardware Availability: Apr-2019

Tested by: Fujitsu

Software Availability: Feb-2019

Platform Notes (Continued)

uname -a:

```
Linux linux-8r5c 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected

CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Jun 20 19:02

SPEC is set to: /home/Benchmark/speccpu2017-fp

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	142G	35G	107G	25%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU V1.0.0.0 R1.16.0 for D3858-B1x 04/24/2019

Memory:

35x Micron 36ASF4G72PZ-2G9E2	32 GB	2 rank	2933
13x Samsung M393A4K40CB2-CVF	32 GB	2 rank	2933

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

C++ | 508.namd_r(base) 510.parest_r(base)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800E2, Intel Xeon Gold 6248,
2.50GHz

SPECrate®2017_fp_base = 444

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Compiler Version Notes (Continued)

=====

C++, C | 511.povray_r(base) 526.blender_r(base)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

=====

C++, C, Fortran | 507.cactubssn_r(base)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

=====

Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

=====

Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800E2, Intel Xeon Gold 6248,
2.50GHz

SPECrate®2017_fp_base = 444

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactusBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800E2, Intel Xeon Gold 6248,
2.50GHz

SPECrate®2017_fp_base = 444

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
-align array32byte

Benchmarks using both C and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
-align array32byte

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.html>
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.xml>
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-06-20 06:04:08-0400.

Report generated on 2019-11-12 15:01:34 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-12.