



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 5218R,
2.10 GHz

SPECrate®2017_fp_base = 200

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19


Test Date: Mar-2020

Test Sponsor: Fujitsu

Hardware Availability: May-2019

Tested by: Fujitsu

Software Availability: May-2019

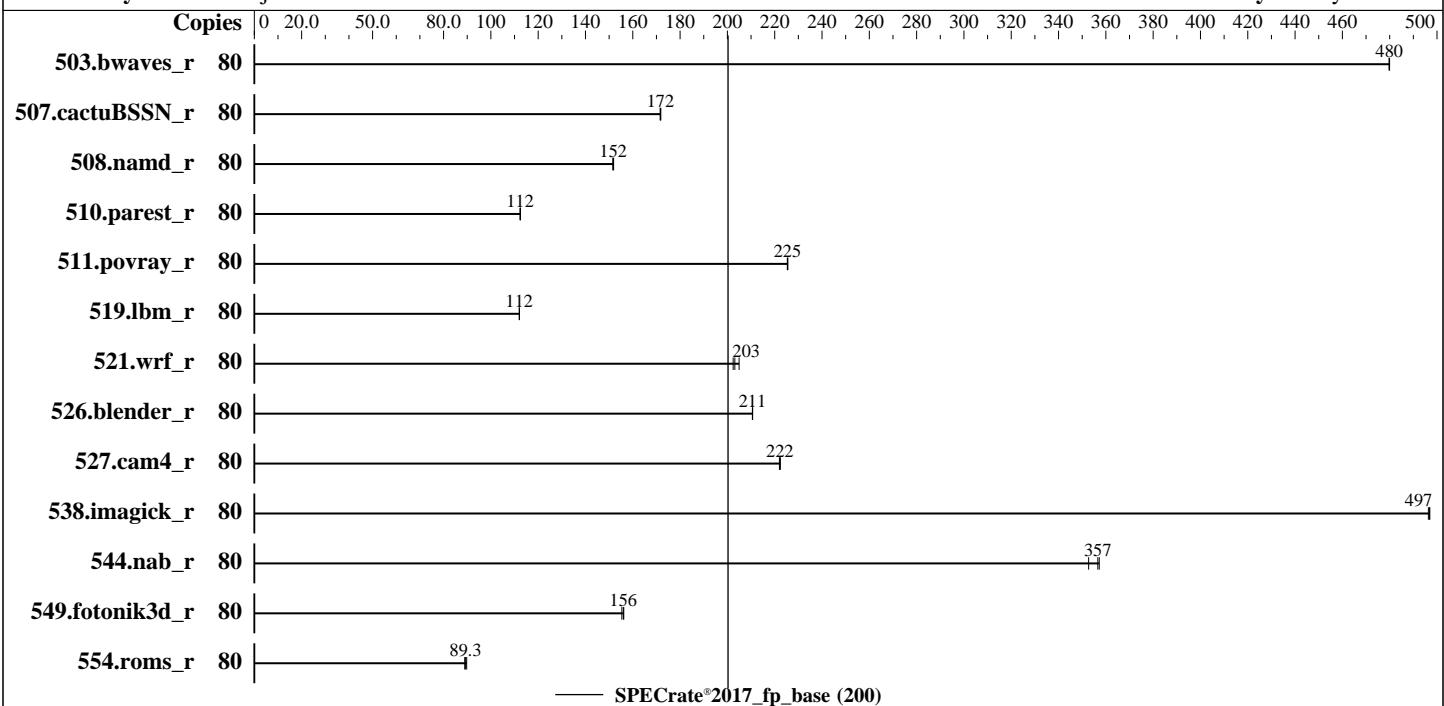

Hardware

CPU Name: Intel Xeon Gold 5218R
 Max MHz: 4000
 Nominal: 2100
 Enabled: 40 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 27.5 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R, running at 2666)
 Storage: 1 x SATA M.2 SSD, 240 GB
 Other: None

Software

OS: SUSE Linux Enterprise Server 15
 Compiler: 4.12.14-25.28-default
 C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
 Parallel: No
 Firmware: Fujitsu BIOS Version V5.0.0.14 R1.18.0 for D3384-B1x released Apr-2020
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 5218R,
2.10 GHz

SPECrate®2017_fp_base = 200

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2020

Hardware Availability: May-2019

Software Availability: May-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	80	1671	480	1672	480	1672	480							
507.cactuBSSN_r	80	589	172	590	172	590	172							
508.namd_r	80	500	152	501	152	501	152							
510.parest_r	80	1862	112	1862	112	1860	113							
511.povray_r	80	829	225	828	226	829	225							
519.lbm_r	80	753	112	752	112	753	112							
521.wrf_r	80	882	203	874	205	885	202							
526.blender_r	80	578	211	578	211	579	211							
527.cam4_r	80	630	222	630	222	629	222							
538.imagick_r	80	400	497	400	497	401	496							
544.nab_r	80	377	357	378	357	382	353							
549.fotonik3d_r	80	1996	156	2007	155	1998	156							
554.roms_r	80	1423	89.3	1416	89.8	1429	88.9							

SPECrate®2017_fp_base = 200

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Kernel Boot Parameter set with: nohz_full=1-79

Process tuning settings:

```
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-1.1.0/lib/intel64"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/Benchmark/cpu2017-1.1.0/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 5218R,
2.10 GHz

SPECrate®2017_fp_base = 200

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Date: Mar-2020

Test Sponsor: Fujitsu

Hardware Availability: May-2019

Tested by: Fujitsu

Software Availability: May-2019

General Notes (Continued)

memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Patrol Scrub = Disabled

WR CRC feature Control = Disabled

Fan Control = Full

Sysinfo program /home/Benchmark/speccpu2017-1.1.0/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on RX2540M5_CLXR Sun Mar 15 11:54:41 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5218R CPU @ 2.10GHz
        2 "physical id"s (chips)
        80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 20
siblings   : 40
physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               80
On-line CPU(s) list: 0-79
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 5218R,
2.10 GHz

SPECrate®2017_fp_base = 200

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Date: Mar-2020

Test Sponsor: Fujitsu

Hardware Availability: May-2019

Tested by: Fujitsu

Software Availability: May-2019

Platform Notes (Continued)

Thread(s) per core: 2
Core(s) per socket: 20
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 5218R CPU @ 2.10GHz
Stepping: 7
CPU MHz: 2100.000
CPU max MHz: 4000.0000
CPU min MHz: 800.0000
BogoMIPS: 4200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 28160K
NUMA node0 CPU(s): 0-2,5,6,10-12,15,16,40-42,45,46,50-52,55,56
NUMA node1 CPU(s): 3,4,7-9,13,14,17-19,43,44,47-49,53,54,57-59
NUMA node2 CPU(s): 20-22,25,26,30-32,35,36,60-62,65,66,70-72,75,76
NUMA node3 CPU(s): 23,24,27-29,33,34,37-39,63,64,67-69,73,74,77-79
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperf mperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrandlahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm mpix rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni flush_l1d arch_capabilities

/proc/cpuinfo cache data
cache size : 28160 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 5 6 10 11 12 15 16 40 41 42 45 46 50 51 52 55 56
node 0 size: 191975 MB
node 0 free: 191486 MB
node 1 cpus: 3 4 7 8 9 13 14 17 18 19 43 44 47 48 49 53 54 57 58 59
node 1 size: 193532 MB
node 1 free: 193267 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 5218R,
2.10 GHz

SPECrate®2017_fp_base = 200

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Date: Mar-2020

Test Sponsor: Fujitsu

Hardware Availability: May-2019

Tested by: Fujitsu

Software Availability: May-2019

Platform Notes (Continued)

```
node 2 cpus: 20 21 22 25 26 30 31 32 35 36 60 61 62 65 66 70 71 72 75 76
node 2 size: 193532 MB
node 2 free: 193284 MB
node 3 cpus: 23 24 27 28 29 33 34 37 38 39 63 64 67 68 69 73 74 77 78 79
node 3 size: 193290 MB
node 3 free: 193032 MB
node distances:
node    0    1    2    3
  0: 10 11 21 21
  1: 11 10 21 21
  2: 21 21 10 11
  3: 21 21 11 10
```

From /proc/meminfo

```
MemTotal:      790865840 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
  NAME="SLES"
  VERSION="15"
  VERSION_ID="15"
  PRETTY_NAME="SUSE Linux Enterprise Server 15"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15"
```

uname -a:

```
Linux RX2540M5_CLXR 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019
(dd6077c) x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	No status reported
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Mar 15 11:50

SPEC is set to: /home/Benchmark/speccpu2017-1.1.0

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 5218R,
2.10 GHz

SPECrate®2017_fp_base = 200

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Date: Mar-2020

Test Sponsor: Fujitsu

Hardware Availability: May-2019

Tested by: Fujitsu

Software Availability: May-2019

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda5	xfs	191G	113G	78G	60%	/home

From /sys/devices/virtual/dmi/id
BIOS: FUJITSU // American Megatrends Inc. V5.0.0.14 R1.18.0 for D3384-B1x
02/10/2020
Vendor: FUJITSU
Product: PRIMERGY RX2540 M5
Product Family: SERVER
Serial: YMSQXXXXXX

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2666

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C           | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
-----
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

=====
C++          | 508.namd_r(base) 510.parest_r(base)
-----
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

=====
C++, C       | 511.povray_r(base) 526.blender_r(base)
-----
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 5218R,
2.10 GHz

SPECrate®2017_fp_base = 200

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Date: Mar-2020

Test Sponsor: Fujitsu

Hardware Availability: May-2019

Tested by: Fujitsu

Software Availability: May-2019

Compiler Version Notes (Continued)

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactuBSSN_r(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 5218R,
2.10 GHz

SPECrate®2017_fp_base = 200

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2020

Hardware Availability: May-2019

Software Availability: May-2019

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactubssn_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Gold 5218R,
2.10 GHz

SPECrate®2017_fp_base = 200

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2020

Hardware Availability: May-2019

Software Availability: May-2019

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-03-14 22:54:40-0400.

Report generated on 2020-04-14 14:18:21 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-14.