



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740 (Intel Xeon Silver 4210R, 2.40 GHz)

SPECSpeed®2017_fp_base = 83.5

SPECSpeed®2017_fp_peak = 86.8

CPU2017 License: 55


Test Date: Apr-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Nov-2019

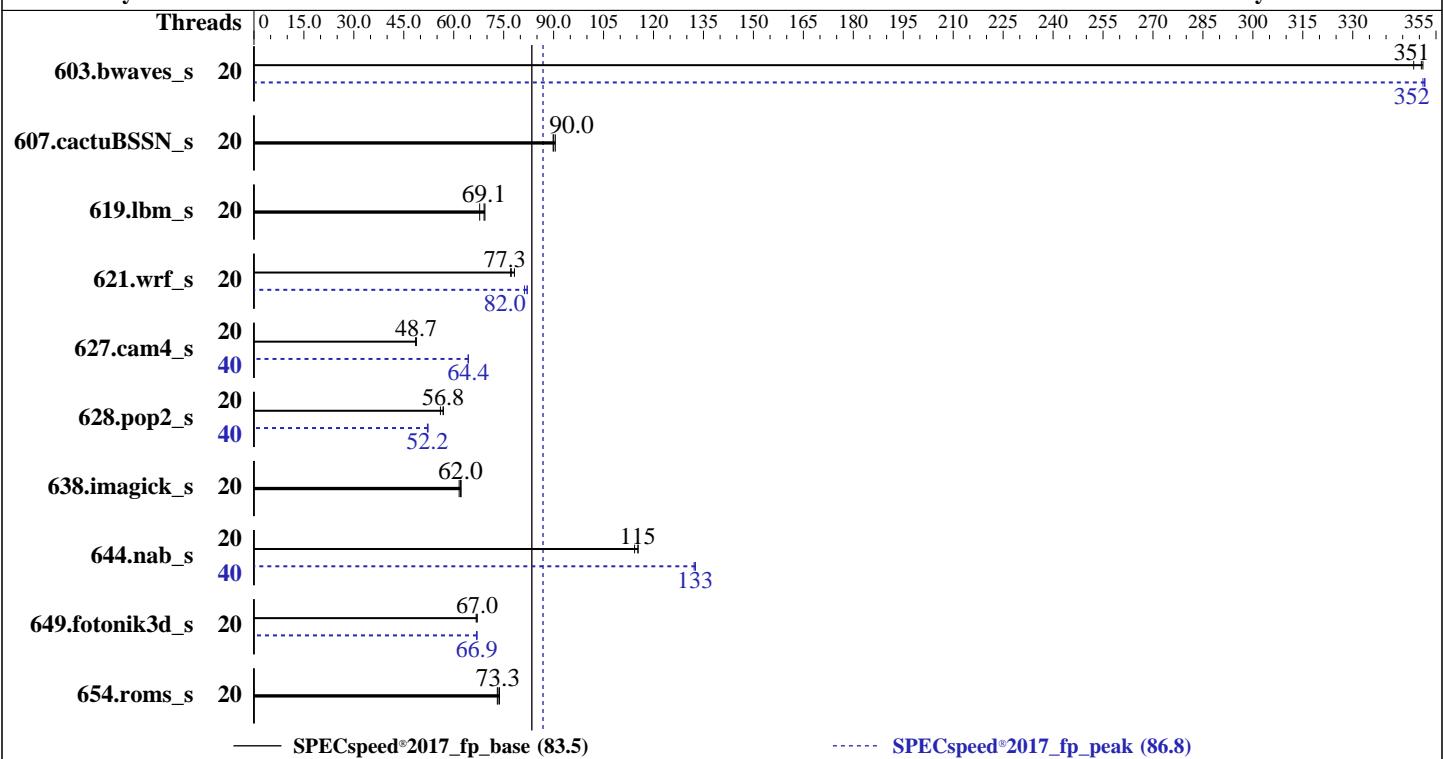

— SPECSpeed®2017_fp_base (83.5)

----- SPECSpeed®2017_fp_peak (86.8)

Hardware

CPU Name: Intel Xeon Silver 4210R
 Max MHz: 3200
 Nominal: 2400
 Enabled: 20 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 13.75 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC4-2933V-R,
 running at 2400)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 8.1
 Compiler: kernel 4.18.0-147.el8.x86_64
 C/C++: Version 19.0.5.281 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 19.0.5.281 of Intel Fortran
 Compiler for Linux
 Parallel: Yes
 Firmware: Version 2.7.1 released Feb-2020
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740 (Intel Xeon Silver 4210R, 2.40 GHz)

SPECSpeed®2017_fp_base = 83.5

SPECSpeed®2017_fp_peak = 86.8

CPU2017 License: 55

Test Date: Apr-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Nov-2019

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	20	169	348	168	351	168	351	20	168	352	168	352	168	351
607.cactuBSSN_s	20	186	89.8	184	90.5	185	90.0	20	186	89.8	184	90.5	185	90.0
619.lbm_s	20	77.3	67.8	75.5	69.4	75.8	69.1	20	77.3	67.8	75.5	69.4	75.8	69.1
621.wrf_s	20	169	78.2	171	77.3	172	77.1	20	161	82.0	161	82.1	163	81.3
627.cam4_s	20	182	48.8	182	48.7	183	48.5	40	138	64.4	138	64.3	138	64.4
628.pop2_s	20	209	56.8	212	56.0	209	56.9	40	227	52.3	228	52.1	228	52.2
638.imagick_s	20	234	61.6	232	62.2	232	62.0	20	234	61.6	232	62.2	232	62.0
644.nab_s	20	152	115	153	114	151	115	40	132	133	132	133	132	132
649.fotonik3d_s	20	136	67.0	136	67.0	137	66.7	20	136	66.9	136	67.0	136	66.9
654.roms_s	20	215	73.3	214	73.7	215	73.1	20	215	73.3	214	73.7	215	73.1
SPECSpeed®2017_fp_base =							83.5	SPECSpeed®2017_fp_peak =						
SPECSpeed®2017_fp_peak =							86.8							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/dev/shm/cpu2017/lib/intel64"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740 (Intel Xeon Silver 4210R, 2.40 GHz)

SPECSpeed®2017_fp_base = 83.5

SPECSpeed®2017_fp_peak = 86.8

CPU2017 License: 55

Test Date: Apr-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Nov-2019

General Notes (Continued)

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

Platform Notes

BIOS settings:

Virtualization Technology disabled

DCU Streamer Prefetcher disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub disabled

Logical Processor enabled

CPU Interconnect Bus Link Power Management enabled

PCI ASPM L1 Link Power Management enabled

```
Sysinfo program /dev/shm/cpu2017/bin/sysinfo
```

```
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
```

```
running on localhost.localdomain Tue Apr 28 21:06:33 2020
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Silver 4210R CPU @ 2.40GHz
```

```
2 "physical id"s (chips)
```

```
40 "processors"
```

```
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
```

```
cpu cores : 10
```

```
siblings : 20
```

```
physical 0: cores 0 1 2 3 4 8 9 10 11 12
```

```
physical 1: cores 0 1 2 3 4 8 9 10 11 12
```

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740 (Intel Xeon Silver 4210R, 2.40 GHz)

SPECspeed®2017_fp_base = 83.5

SPECspeed®2017_fp_peak = 86.8

CPU2017 License: 55

Test Date: Apr-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Nov-2019

Platform Notes (Continued)

CPU(s): 40
On-line CPU(s) list: 0-39
Thread(s) per core: 2
Core(s) per socket: 10
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Silver 4210R CPU @ 2.40GHz
Stepping: 7
CPU MHz: 1711.433
CPU max MHz: 3200.0000
CPU min MHz: 1000.0000
BogoMIPS: 4800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 14080K
NUMA node0 CPU(s): 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38
NUMA node1 CPU(s): 1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc cpuid aperf mperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bm1l hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_lll arch_capabilities

/proc/cpuinfo cache data
cache size : 14080 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38
node 0 size: 385583 MB
node 0 free: 369265 MB
node 1 cpus: 1 3 5 7 9 11 13 15 17 19 21 23 25 27 29 31 33 35 37 39
node 1 size: 387067 MB
node 1 free: 379703 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740 (Intel Xeon Silver 4210R, 2.40 GHz)

SPECSpeed®2017_fp_base = 83.5

SPECSpeed®2017_fp_peak = 86.8

CPU2017 License: 55

Test Date: Apr-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Nov-2019

Platform Notes (Continued)

```
node distances:
node 0 1
 0: 10 21
 1: 21 10

From /proc/meminfo
MemTotal:      791194144 kB
HugePages_Total:        0
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.1 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.1"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga

uname -a:
Linux localhost.localdomain 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):          Not affected
Microarchitectural Data Sampling:            Not affected
CVE-2017-5754 (Meltdown):                  Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                                via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):         Mitigation: usercopy/swapgs barriers and __user
                                                pointer sanitization
CVE-2017-5715 (Spectre variant 2):         Mitigation: Enhanced IBRS, IBPB: conditional,
                                                RSB filling

run-level 3 Apr 28 15:03

SPEC is set to: /dev/shm/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs          tmpfs  378G   14G  364G   4% /dev/shm

From /sys/devices/virtual/dmi/id
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740 (Intel Xeon Silver 4210R, 2.40 GHz)

SPECSpeed®2017_fp_base = 83.5

SPECSpeed®2017_fp_peak = 86.8

CPU2017 License: 55

Test Date: Apr-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Nov-2019

Platform Notes (Continued)

BIOS: Dell Inc. 2.7.1 02/14/2020

Vendor: Dell Inc.

Product: PowerEdge MX740c

Product Family: PowerEdge

Serial: 1234567

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

21x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933

1x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933

2x 00AD069D00AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
| 644.nab_s(base, peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 607.cactuBSSN_s(base, peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
| 654.roms_s(base, peak)

=====

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740 (Intel Xeon Silver 4210R, 2.40 GHz)

SPECspeed®2017_fp_base = 83.5

SPECspeed®2017_fp_peak = 86.8

CPU2017 License: 55

Test Date: Apr-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Nov-2019

Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
| 628.pop2_s(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740 (Intel Xeon Silver 4210R, 2.40 GHz)

SPECspeed®2017_fp_base = 83.5

SPECspeed®2017_fp_peak = 86.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Base Portability Flags (Continued)

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-m64 -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs
```

Peak Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740 (Intel Xeon Silver 4210R, 2.40 GHz)

SPECspeed®2017_fp_base = 83.5

SPECspeed®2017_fp_peak = 86.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Nov-2019

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: -m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
-qopenmp -DSPEC_OPENMP

Fortran benchmarks:

603.bwaves_s: -m64 -prof-gen(pass 1) -prof-use(pass 2)
-DSPEC_SUPPRESS_OPENMP -DSPEC_OPENMP -O2 -xCORE-AVX512
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs

649.fotonik3d_s: Same as 603.bwaves_s

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -std=c11 -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-prefetch -ipo -O3 -ffinite-math-only
-no-prec-div -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs

627.cam4_s: -m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
-qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:

607.cactusBSSN_s: basepeak = yes



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX740 (Intel Xeon Silver 4210R, 2.40 GHz)

SPECspeed®2017_fp_base = 83.5

SPECspeed®2017_fp_peak = 86.8

CPU2017 License: 55

Test Date: Apr-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Nov-2019

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.html

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.xml

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-04-28 21:06:32-0400.

Report generated on 2020-05-26 14:49:34 by CPU2017 PDF formatter v6255.

Originally published on 2020-05-26.