



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 269

PowerEdge M640 (Intel Xeon Gold 5220R, 2.20 GHz)

SPECrate®2017\_int\_peak = 280

CPU2017 License: 55


Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

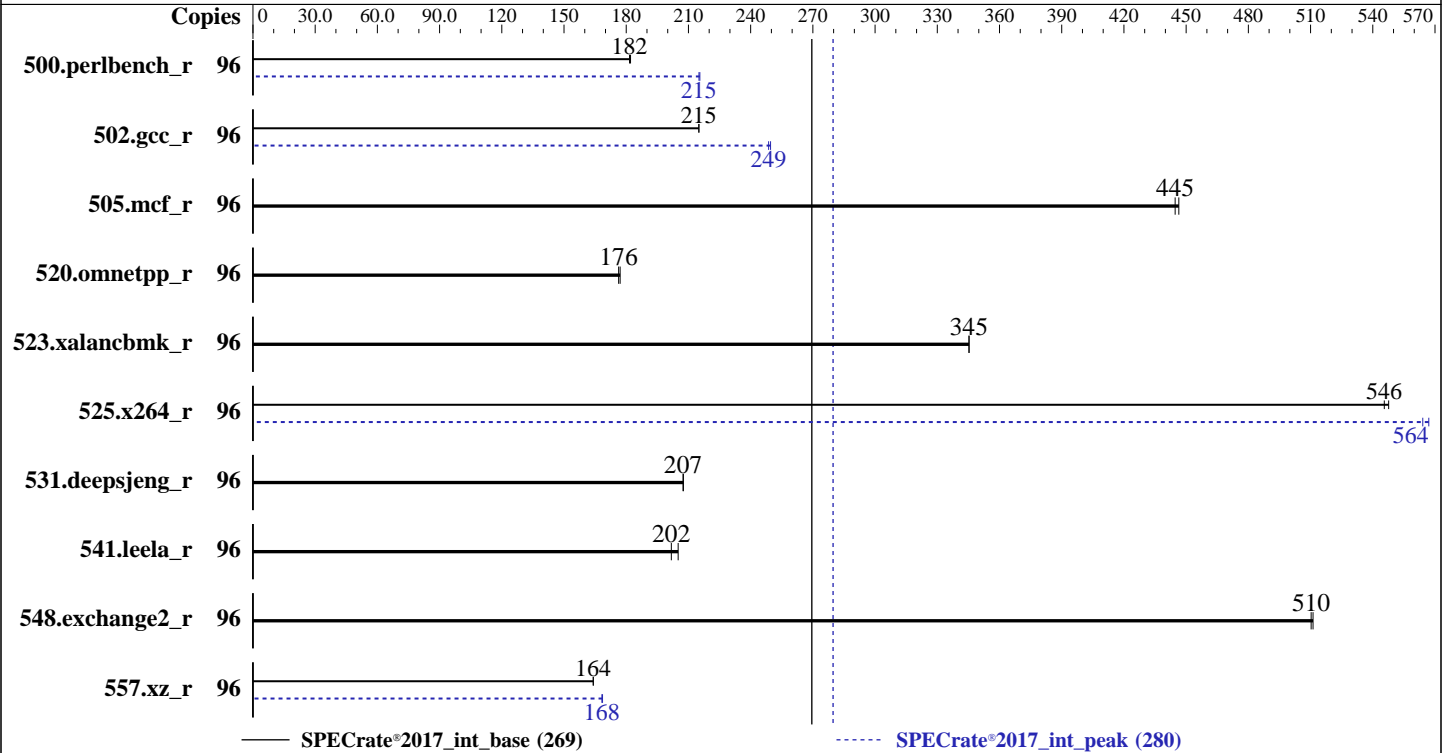

### Hardware

CPU Name: Intel Xeon Gold 5220R  
 Max MHz: 4000  
 Nominal: 2200  
 Enabled: 48 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx8 PC4-2933V-R, running at 2666)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.1  
 kernel 4.18.0-147.el8.x86\_64  
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Version 2.6.3 released Feb-2020  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 269

PowerEdge M640 (Intel Xeon Gold 5220R, 2.20 GHz)

SPECrate®2017\_int\_peak = 280

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: May-2020  
Hardware Availability: Feb-2020  
Software Availability: Apr-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	839	182	<b>842</b>	<b>182</b>			96	709	216	<b>711</b>	<b>215</b>		
502.gcc_r	96	<b>632</b>	<b>215</b>	632	215			96	545	250	<b>547</b>	<b>249</b>		
505.mcf_r	96	347	446	<b>349</b>	<b>445</b>			96	347	446	<b>349</b>	<b>445</b>		
520.omnetpp_r	96	<b>714</b>	<b>176</b>	711	177			96	<b>714</b>	<b>176</b>	711	177		
523.xalancbmk_r	96	<b>294</b>	<b>345</b>	294	345			96	<b>294</b>	<b>345</b>	294	345		
525.x264_r	96	<b>308</b>	<b>546</b>	307	548			96	<b>298</b>	<b>564</b>	296	567		
531.deepsjeng_r	96	<b>530</b>	<b>207</b>	530	208			96	<b>530</b>	<b>207</b>	530	208		
541.leela_r	96	775	205	<b>788</b>	<b>202</b>			96	775	205	<b>788</b>	<b>202</b>		
548.exchange2_r	96	492	511	<b>493</b>	<b>510</b>			96	492	511	<b>493</b>	<b>510</b>		
557.xz_r	96	<b>632</b>	<b>164</b>	632	164			96	<b>616</b>	<b>168</b>	615	169		

SPECrate®2017\_int\_base = **269**

SPECrate®2017\_int\_peak = **280**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux  
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
  "/dev/shm/cpu2017-ic19.1u1/lib/intel64:/dev/shm/cpu2017-ic19.1u1/lib/ia3  
  2:/dev/shm/cpu2017-ic19.1u1/je5.0.1-32"  
MALLOC\_CONF = "retain:true"



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 269

PowerEdge M640 (Intel Xeon Gold 5220R, 2.20 GHz)

SPECrate®2017\_int\_peak = 280

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS settings:

Sub NUMA Cluster enabled

Virtualization Technology disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub set to standard

Logical Processor enabled

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

UPI Prefetch enabled

LLC Prefetch disabled

Dead Line LLC Alloc enabled

Directory AtoS disabled

Sysinfo program /dev/shm/cpu2017-ic19.lul/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on localhost.localdomain Fri May 29 12:09:36 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 269

PowerEdge M640 (Intel Xeon Gold 5220R, 2.20 GHz)

SPECrate®2017\_int\_peak = 280

CPU2017 License: 55

Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

## Platform Notes (Continued)

From /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Gold 5220R CPU @ 2.20GHz
 2 "physical id"s (chips)
 96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores      : 24
siblings       : 48
physical 0:    cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 1:    cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 96
On-line CPU(s) list:   0-95
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              2
NUMA node(s):          4
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Gold 5220R CPU @ 2.20GHz
Stepping:               7
CPU MHz:                3216.331
CPU max MHz:            4000.0000
CPU min MHz:            1000.0000
BogoMIPS:               4400.00
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               36608K
NUMA node0 CPU(s):     0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92
NUMA node1 CPU(s):     1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93
NUMA node2 CPU(s):     2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94
NUMA node3 CPU(s):     3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 269

PowerEdge M640 (Intel Xeon Gold 5220R, 2.20 GHz)

SPECrate®2017\_int\_peak = 280

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Platform Notes (Continued)

```

xtpr pdcn pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92
node 0 size: 95304 MB
node 0 free: 86130 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77 81 85 89 93
node 1 size: 96737 MB
node 1 free: 96436 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78 82 86 90 94
node 2 size: 96763 MB
node 2 free: 96077 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79 83 87 91 95
node 3 size: 96762 MB
node 3 free: 96590 MB
node distances:
node  0  1  2  3
  0:  10  21  11  21
  1:  21  10  21  11
  2:  11  21  10  21
  3:  21  11  21  10

```

```

From /proc/meminfo
MemTotal:      394821904 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.1 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.1"
PLATFORM_ID="platform:el8"

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 269

PowerEdge M640 (Intel Xeon Gold 5220R, 2.20 GHz)

SPECrate®2017\_int\_peak = 280

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Platform Notes (Continued)

```
PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
```

```
ANSI_COLOR="0;31"
```

```
redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
```

```
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
```

```
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga
```

```
uname -a:
```

```
Linux localhost.localdomain 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

```
run-level 3 May 29 12:04
```

```
SPEC is set to: /dev/shm/cpu2017-ic19.1ul
```

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	189G	4.2G	185G	3%	/dev/shm

```
From /sys/devices/virtual/dmi/id
```

```
BIOS: Dell Inc. 2.6.3 02/03/2020
```

```
Vendor: Dell Inc.
```

```
Product: PowerEdge M640
```

```
Product Family: PowerEdge
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
5x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
```

```
4x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
```

```
3x 00AD069D00AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
```

```
4x Not Specified Not Specified
```

(End of data from sysinfo program)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 269

PowerEdge M640 (Intel Xeon Gold 5220R, 2.20 GHz)

SPECrate®2017\_int\_peak = 280

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen  
Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(peak) 557.xz\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen  
Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(peak) 557.xz\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 269

PowerEdge M640 (Intel Xeon Gold 5220R, 2.20 GHz)

SPECrate®2017\_int\_peak = 280

CPU2017 License: 55

Test Date: May-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

## Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 502.gcc\_r(peak)

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak) 557.xz\_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1 NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(peak) 557.xz\_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1 NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Fortran | 548.exchange2\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 269

PowerEdge M640 (Intel Xeon Gold 5220R, 2.20 GHz)

SPECrate®2017\_int\_peak = 280

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse
-funroll-loops -fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 269

PowerEdge M640 (Intel Xeon Gold 5220R, 2.20 GHz)

SPECrate®2017\_int\_peak = 280

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)  
-xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -fno-strict-overflow  
-mbranches-within-32B-boundaries  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 269

PowerEdge M640 (Intel Xeon Gold 5220R, 2.20 GHz)

SPECrate®2017\_int\_peak = 280

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

## Peak Optimization Flags (Continued)

502.gcc\_r: -m32

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/ia32_lin  
-std=gnu89  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto  
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold  
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib  
-ljemalloc
```

505.mcf\_r: basepeak = yes

525.x264\_r: -m64 -qnextgen -std=c11

```
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -xCORE-AVX512 -flto -O3 -ffast-math  
-fuse-ld=gold -qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

557.xz\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

```
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE10.html>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 269

PowerEdge M640 (Intel Xeon Gold 5220R, 2.20 GHz)

SPECrate®2017\_int\_peak = 280

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** May-2020

**Hardware Availability:** Feb-2020

**Software Availability:** Apr-2020

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.lul1-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.lul1-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE10.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-05-29 12:09:35-0400.

Report generated on 2020-06-23 18:03:45 by CPU2017 PDF formatter v6255.

Originally published on 2020-06-23.