



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge MX750c (Intel Xeon Platinum 8352Y, 2.20 GHz)

SPECrate®2017\_int\_base = 413

SPECrate®2017\_int\_peak = 427

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2021

Hardware Availability: Apr-2021

Software Availability: Mar-2021

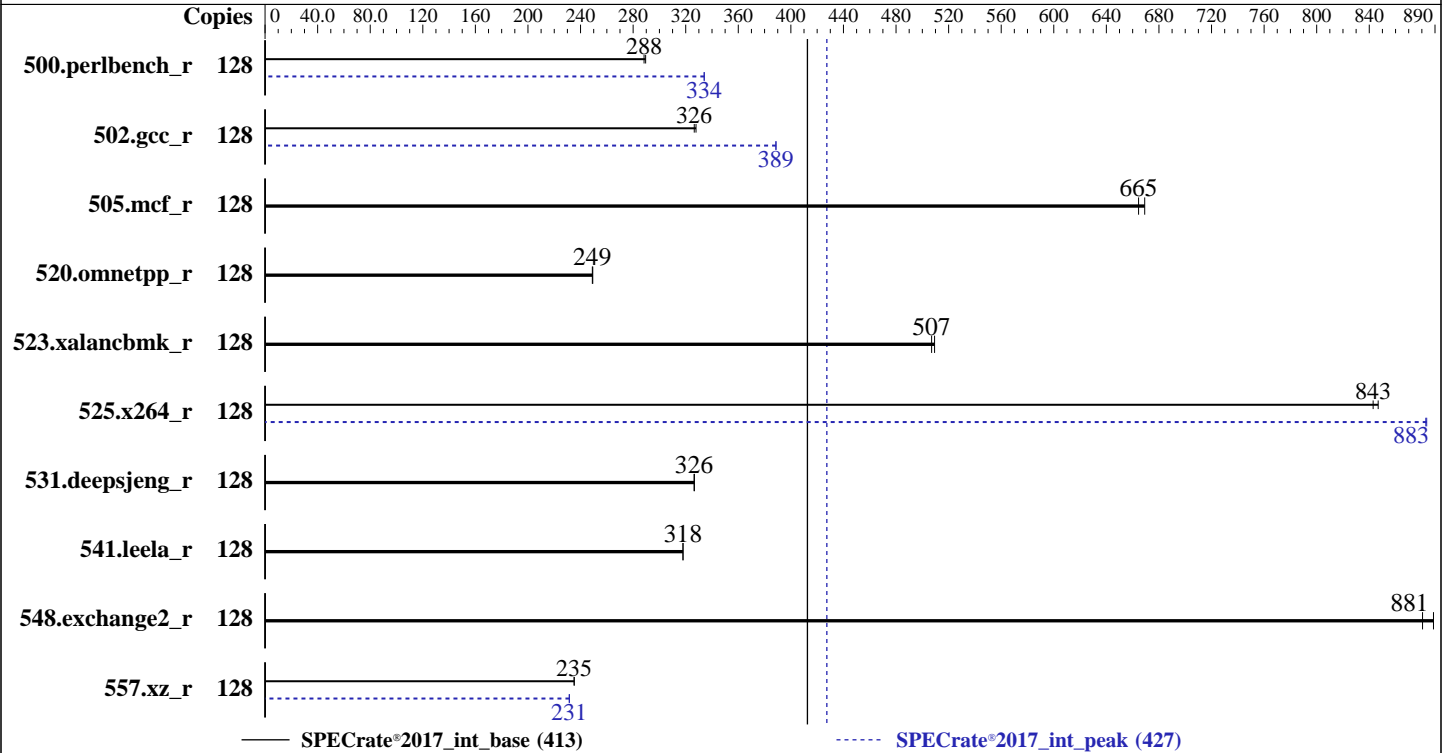

### Hardware

CPU Name: Intel Xeon Platinum 8352Y  
 Max MHz: 3400  
 Nominal: 2200  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 48 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)  
 Storage: 125 GB on tmpfs  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.3 (Ootpa)  
 4.18.0-240.el8.x86\_64  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++  
 Compiler Build 20201113 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler  
 Classic Build 20201112 for Linux;  
 C/C++: Version 2021.1 of Intel C/C++ Compiler  
 Classic Build 20201112 for Linux  
 Parallel: No  
 Firmware: Version 1.1.0 released Mar-2021  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance  
 at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge MX750c (Intel Xeon Platinum 8352Y, 2.20 GHz)

SPECrate®2017\_int\_base = 413

SPECrate®2017\_int\_peak = 427

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Mar-2021  
Hardware Availability: Apr-2021  
Software Availability: Mar-2021

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	<b>707</b>	<b>288</b>	704	290			128	<b>610</b>	<b>334</b>	610	334		
502.gcc_r	128	<b>555</b>	<b>326</b>	553	328			128	<b>466</b>	<b>389</b>	466	389		
505.mcf_r	128	309	669	<b>311</b>	<b>665</b>			128	309	669	<b>311</b>	<b>665</b>		
520.omnetpp_r	128	674	249	<b>675</b>	<b>249</b>			128	674	249	<b>675</b>	<b>249</b>		
523.xalancbmk_r	128	265	509	<b>267</b>	<b>507</b>			128	265	509	<b>267</b>	<b>507</b>		
525.x264_r	128	<b>266</b>	<b>843</b>	265	847			128	<b>254</b>	<b>883</b>	254	884		
531.deepsjeng_r	128	<b>449</b>	<b>326</b>	449	327			128	<b>449</b>	<b>326</b>	449	327		
541.leela_r	128	667	318	<b>667</b>	<b>318</b>			128	667	318	<b>667</b>	<b>318</b>		
548.exchange2_r	128	<b>381</b>	<b>881</b>	377	889			128	<b>381</b>	<b>881</b>	377	889		
557.xz_r	128	<b>588</b>	<b>235</b>	588	235			128	<b>598</b>	<b>231</b>	597	232		

SPECrate®2017\_int\_base = 413

SPECrate®2017\_int\_peak = 427

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/mnt/ramdisk/cpu2017-ic19.1u1/lib/intel64:/mnt/ramdisk/cpu2017-ic19.1u1/lib/ia32:/mnt/ramdisk/cpu2017-ic19.1u1/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge MX750c (Intel Xeon Platinum 8352Y, 2.20 GHz)

SPECrate®2017\_int\_base = 413

SPECrate®2017\_int\_peak = 427

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Mar-2021

**Hardware Availability:** Apr-2021

**Software Availability:** Mar-2021

## General Notes (Continued)

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

Sub NUMA Cluster : 2-Way Clustering

Virtualization Technology : Disabled

System Profile : Custom

CPU Power Management : Maximum Performance

C1E : Disabled

C States : Autonomous

Memory Patrol Scrub : Disabled

Energy Efficiency Policy : Performance

CPU Interconnect Bus Link

Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-ic19.lul/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on localhost.localdomain Sat Mar 27 07:10:45 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8352Y CPU @ 2.20GHz

2 "physical id"s (chips)

128 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge MX750c (Intel Xeon Platinum 8352Y, 2.20 GHz)

SPECrate®2017\_int\_base = 413

SPECrate®2017\_int\_peak = 427

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Mar-2021  
**Hardware Availability:** Apr-2021  
**Software Availability:** Mar-2021

## Platform Notes (Continued)

excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 32
siblings  : 64
physical 0: cores 0 1 2 3 4 5 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
28 29 30 31
physical 1: cores 0 1 2 3 4 5 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
28 29 30 31
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:  0-127
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):             2
NUMA node(s):         4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                106
Model name:            Intel(R) Xeon(R) Platinum 8352Y CPU @ 2.20GHz
Stepping:              6
CPU MHz:               2800.070
BogoMIPS:              4400.00
Virtualization:       VT-x
L1d cache:             48K
L1i cache:             32K
L2 cache:              1280K
L3 cache:              49152K
NUMA node0 CPU(s):    0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92,96,100,104,108,112,116,120,124
NUMA node1 CPU(s):    2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94,98,102,106,110,114,118,122,126
NUMA node2 CPU(s):    1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93,97,101,105,109,113,117,121,125
NUMA node3 CPU(s):    3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95,99,103,107,111,115,119,123,127
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge MX750c (Intel Xeon Platinum 8352Y, 2.20 GHz)

SPECrate®2017\_int\_base = 413

SPECrate®2017\_int\_peak = 427

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2021

Hardware Availability: Apr-2021

Software Availability: Mar-2021

## Platform Notes (Continued)

```

avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd
dtherm ida arat pln pts avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 49152 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96
100 104 108 112 116 120 124
node 0 size: 124900 MB
node 0 free: 107935 MB
node 1 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78 82 86 90 94 98
102 106 110 114 118 122 126
node 1 size: 125721 MB
node 1 free: 128352 MB
node 2 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77 81 85 89 93 97
101 105 109 113 117 121 125
node 2 size: 125862 MB
node 2 free: 128697 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79 83 87 91 95 99
103 107 111 115 119 123 127
node 3 size: 125766 MB
node 3 free: 128653 MB
node distances:
node  0  1  2  3
0:   10  11  20  20
1:   11  10  20  20
2:   20  20  10  11
3:   20  20  11  10

```

```

From /proc/meminfo
MemTotal:      527792668 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.3 (Ootpa)"

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge MX750c (Intel Xeon Platinum 8352Y, 2.20 GHz)

SPECrate®2017\_int\_base = 413

SPECrate®2017\_int\_peak = 427

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2021

Hardware Availability: Apr-2021

Software Availability: Mar-2021

## Platform Notes (Continued)

```

ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.3"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
ANSI_COLOR="0;31"

```

```

redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

```

uname -a:

```

Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

itlb_multihit:                Not affected
CVE-2018-3620 (L1 Terminal Fault):    Not affected
Microarchitectural Data Sampling:    Not affected
CVE-2017-5754 (Meltdown):            Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):    Mitigation: usercopy/swapgs barriers and __user
pointer sanitization
CVE-2017-5715 (Spectre variant 2):    Mitigation: Enhanced IBRS, IBPB: conditional,
RSB filling
srbds:                            Not affected
tsx_async_abort:                 Not affected

```

run-level 3 Mar 27 07:04 last=5

SPEC is set to: /mnt/ramdisk/cpu2017-ic19.1ul

```

Filesystem  Type  Size  Used Avail Use% Mounted on
tmpfs      tmpfs 125G  9.6G 116G   8% /mnt/ramdisk

```

From /sys/devices/virtual/dmi/id

```

BIOS:      Dell Inc. 1.1.0 03/25/2021
Vendor:    Dell Inc.
Product:   PowerEdge MX750c
Product Family: PowerEdge
Serial:    1234567

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge MX750c (Intel Xeon Platinum 8352Y, 2.20 GHz)

SPECrate®2017\_int\_base = 413

SPECrate®2017\_int\_peak = 427

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Mar-2021  
**Hardware Availability:** Apr-2021  
**Software Availability:** Mar-2021

## Platform Notes (Continued)

16x 002C0632002C 18ASF4G72PDZ-3G2E1 32 GB 2 rank 3200  
16x Not Specified Not Specified

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 500.perlbench\_r(peak) 557.xz\_r(peak)  
=====

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

=====  
C | 502.gcc\_r(peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

=====  
C | 500.perlbench\_r(peak) 557.xz\_r(peak)  
=====

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

=====  
C | 502.gcc\_r(peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge MX750c (Intel Xeon Platinum 8352Y, 2.20 GHz)

SPECrate®2017\_int\_base = 413

SPECrate®2017\_int\_peak = 427

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2021

Hardware Availability: Apr-2021

Software Availability: Mar-2021

## Compiler Version Notes (Continued)

```
=====
C          | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
          | 525.x264_r(base, peak) 557.xz_r(base)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
C          | 500.perlbench_r(peak) 557.xz_r(peak)
-----
```

```
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
C          | 502.gcc_r(peak)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
C          | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
          | 525.x264_r(base, peak) 557.xz_r(base)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
C++       | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran   | 548.exchange2_r(base, peak)
-----
```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge MX750c (Intel Xeon Platinum 8352Y, 2.20 GHz)

SPECrate®2017\_int\_base = 413

SPECrate®2017\_int\_peak = 427

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Mar-2021

**Hardware Availability:** Apr-2021

**Software Availability:** Mar-2021

## Compiler Version Notes (Continued)

-----  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64\_lin  
-lqkmalloc

C++ benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge MX750c (Intel Xeon Platinum 8352Y, 2.20 GHz)

SPECrate®2017\_int\_base = 413

SPECrate®2017\_int\_peak = 427

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Mar-2021

**Hardware Availability:** Apr-2021

**Software Availability:** Mar-2021

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-auto -mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

icx

500.perlbench\_r: icc

557.xz\_r: icc

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge MX750c (Intel Xeon Platinum 8352Y, 2.20 GHz)

SPECrate®2017\_int\_base = 413

SPECrate®2017\_int\_peak = 427

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Mar-2021

**Hardware Availability:** Apr-2021

**Software Availability:** Mar-2021

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmallocc
```

```
502.gcc_r: -m32
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc32-5.0.1/lib -ljemallocc
```

```
505.mcf_r: basepeak = yes
```

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto
-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmallocc
```

```
557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmallocc
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes
```

```
523.xalancbmk_r: basepeak = yes
```

```
531.deepsjeng_r: basepeak = yes
```

```
541.leela_r: basepeak = yes
```

Fortran benchmarks:

```
548.exchange2_r: basepeak = yes
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge MX750c (Intel Xeon Platinum 8352Y, 2.20 GHz)

SPECrate®2017\_int\_base = 413

SPECrate®2017\_int\_peak = 427

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Mar-2021

**Hardware Availability:** Apr-2021

**Software Availability:** Mar-2021

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE12.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE12.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2021-03-27 07:10:44-0400.

Report generated on 2021-04-14 14:14:33 by CPU2017 PDF formatter v6442.

Originally published on 2021-04-13.