



SPEC CPU® 2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)


ProLiant DL345 Gen10 Plus
(2.65 GHz, AMD EPYC 7413)

SPECspeed®2017_fp_base = 129

SPECspeed®2017_fp_peak = 132

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

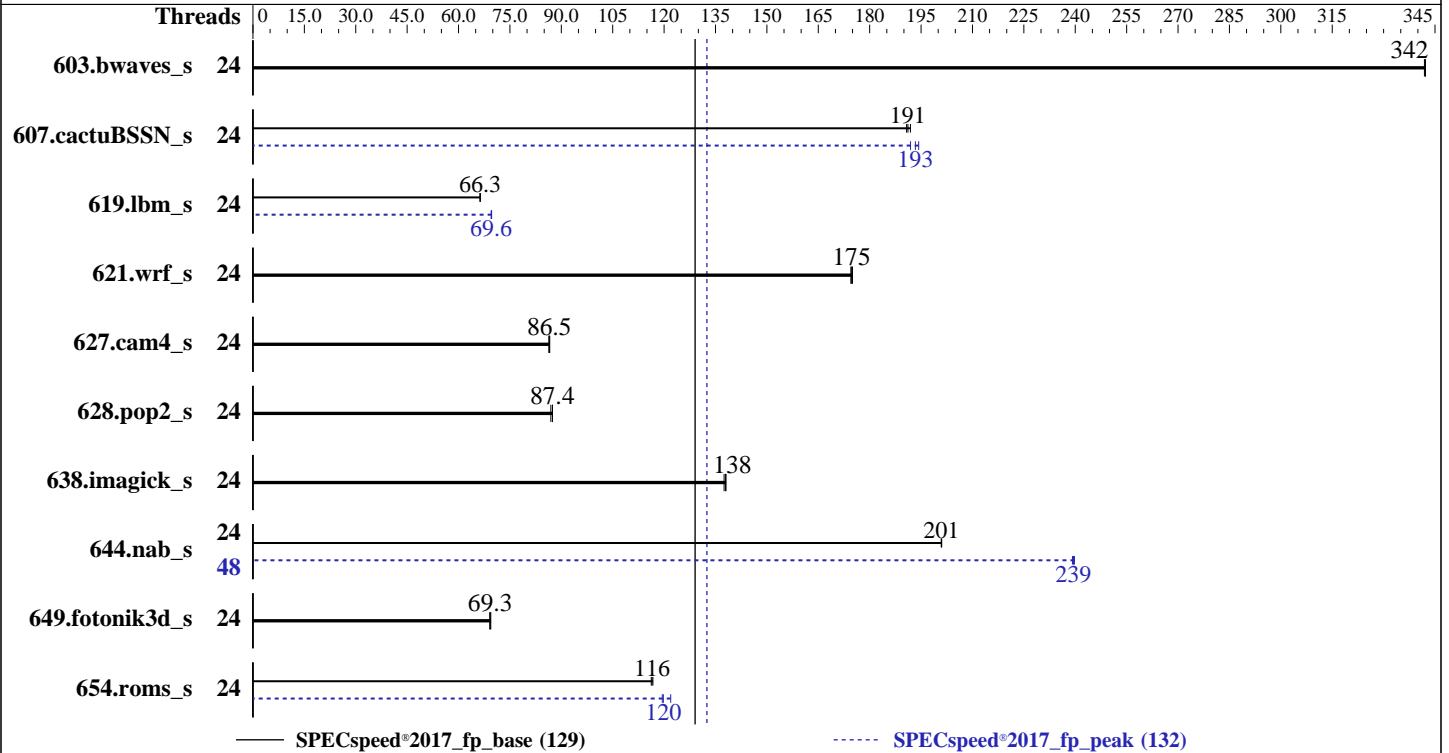

Hardware

CPU Name: AMD EPYC 7413
 Max MHz: 3600
 Nominal: 2650
 Enabled: 24 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 128 MB I+D on chip per chip, 32 MB shared / 6 cores
 Other: None
 Memory: 1 TB (8 x 128 GB 4Rx4 PC4-3200AA-L)
 Storage: 4 x 480 GB SAS SSD, RAID 0
 Other: None

Software

OS: Ubuntu 20.04.1 LTS (x86_64)
 Kernel 5.4.0-56-generic
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC
 Parallel: Yes
 Firmware: HPE BIOS Version A43 v2.40 02/15/2021 released Feb-2021
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.65 GHz, AMD EPYC 7413)

SPECspeed®2017_fp_base = 129

SPECspeed®2017_fp_peak = 132

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	24	173	342	172	342	<u>172</u>	<u>342</u>	24	173	342	172	342	<u>172</u>	<u>342</u>
607.cactuBSSN_s	24	87.2	191	87.4	191	86.9	192	24	86.9	192	86.2	193	85.8	194
619.lbm_s	24	79.0	66.3	79.0	66.3	79.0	66.3	24	75.3	69.5	75.2	69.7	75.3	69.6
621.wrf_s	24	75.8	175	75.7	175	75.6	175	24	75.8	175	75.7	175	75.6	175
627.cam4_s	24	102	86.5	102	86.6	103	86.4	24	102	86.5	102	86.6	103	86.4
628.pop2_s	24	137	86.9	136	87.4	136	87.4	24	137	86.9	136	87.4	136	87.4
638.imagick_s	24	105	138	104	138	105	138	24	105	138	104	138	105	138
644.nab_s	24	87.0	201	86.9	201	86.9	201	48	73.0	239	72.9	240	73.0	239
649.fotonik3d_s	24	132	69.3	131	69.4	132	69.1	24	132	69.3	131	69.4	132	69.1
654.roms_s	24	135	117	135	116	135	116	24	129	122	131	120	132	119

SPECspeed®2017_fp_base = **129**

SPECspeed®2017_fp_peak = **132**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout randomization (ASLR) to reduce run-to-run variability.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.65 GHz, AMD EPYC 7413)

SPECspeed®2017_fp_base = 129

SPECspeed®2017_fp_peak = 132

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.  
To enable THP only on request for peak runs of 628.pop2_s, and 638.imagick_s,  
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.  
To disable THP for peak runs of 627.cam4_s, 644.nab_s, 649.fotonik3d_s, and 654.roms_s,  
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-47"  
LD_LIBRARY_PATH =  
    "/home/SPEC_CPU2017/cpu2017/amd_speed_aocc300_milan_B_lib/64:/home/SPEC_  
    CPU2017/cpu2017/amd_speed_aocc300_milan_B_lib/32:"  
MALLOC_CONF = "retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "48"
```

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:

```
GOMP_CPU_AFFINITY = "0-23"
```

Environment variables set by runcpu during the 619.lbm_s peak run:

```
GOMP_CPU_AFFINITY = "0-23"
```

Environment variables set by runcpu during the 644.nab_s peak run:

```
GOMP_CPU_AFFINITY = "0 24 1 25 2 26 3 27 4 28 5 29 6 30 7 31 8 32 9 33 10 34  
11 35 12 36 13 37 14 38 15 39 16 40 17 41 18 42 19 43 20 44 21 45 22 46  
23 47"
```

Environment variables set by runcpu during the 654.roms_s peak run:

```
GOMP_CPU_AFFINITY = "0-23"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.65 GHz, AMD EPYC 7413)

SPECspeed®2017_fp_base = 129

SPECspeed®2017_fp_peak = 132

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

General Notes (Continued)

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4
jemalloc 5.1.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Configuration
Workload Profile set to General Peak Frequency Compute
Determinism Control set to Manual
Performance Determinism set to Power Deterministic
Last-Level Cache (LLC) as NUMA Node set to Enabled
NUMA memory domains per socket set to One memory domain per socket
Thermal Configuration set to Maximum Cooling
Workload Profile set to Custom
Infinity Fabric Power Management set to Disabled
Infinity Fabric Performance State set to P0
Power Regulator set to OS Control Mode

sysinfo program /home/SPEC_CPU2017/cpu2017/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on admin Wed Apr 1 20:02:45 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : AMD EPYC 7413 24-Core Processor
1 "physical id"s (chips)
48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings : 48
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 48 bits physical, 48 bits virtual
CPU(s): 48
On-line CPU(s) list: 0-47
Thread(s) per core: 2
Core(s) per socket: 24

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.65 GHz, AMD EPYC 7413)

SPECspeed®2017_fp_base = 129

SPECspeed®2017_fp_peak = 132

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Platform Notes (Continued)

```

Socket(s): 1
NUMA node(s): 4
Vendor ID: AuthenticAMD
CPU family: 25
Model: 1
Model name: AMD EPYC 7413 24-Core Processor
Stepping: 1
Frequency boost: enabled
CPU MHz: 3570.667
CPU max MHz: 2650.0000
CPU min MHz: 1500.0000
BogoMIPS: 5290.06
Virtualization: AMD-V
L1d cache: 768 KiB
L1i cache: 768 KiB
L2 cache: 12 MiB
L3 cache: 128 MiB
NUMA node0 CPU(s): 0-5,24-29
NUMA node1 CPU(s): 6-11,30-35
NUMA node2 CPU(s): 12-17,36-41
NUMA node3 CPU(s): 18-23,42-47
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmpperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes
xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap
clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

/proc/cpuinfo cache data

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.65 GHz, AMD EPYC 7413)

SPECspeed®2017_fp_base = 129

SPECspeed®2017_fp_peak = 132

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Platform Notes (Continued)

cache size : 512 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 24 25 26 27 28 29
node 0 size: 257799 MB
node 0 free: 256910 MB
node 1 cpus: 6 7 8 9 10 11 30 31 32 33 34 35
node 1 size: 258020 MB
node 1 free: 257763 MB
node 2 cpus: 12 13 14 15 16 17 36 37 38 39 40 41
node 2 size: 258045 MB
node 2 free: 257786 MB
node 3 cpus: 18 19 20 21 22 23 42 43 44 45 46 47
node 3 size: 245933 MB
node 3 free: 245693 MB
node distances:
node  0  1  2  3
  0:  10  11  11  11
  1:  11  10  11  11
  2:  11  11  10  11
  3:  11  11  11  10

```

```

From /proc/meminfo
MemTotal:      1044274404 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

```

/usr/bin/lsb_release -d
Ubuntu 20.04.1 LTS

```

```

From /etc/*release* /etc/*version*
debian_version: bullseye/sid
os-release:
NAME="Ubuntu"
VERSION="20.04.1 LTS (Focal Fossa)"
ID=ubuntu
ID_LIKE=debian
PRETTY_NAME="Ubuntu 20.04.1 LTS"
VERSION_ID="20.04"
HOME_URL="https://www.ubuntu.com/"
SUPPORT_URL="https://help.ubuntu.com/"

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.65 GHz, AMD EPYC 7413)

SPECspeed®2017_fp_base = 129

SPECspeed®2017_fp_peak = 132

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Platform Notes (Continued)

uname -a:

```
Linux admin 5.4.0-56-generic #62-Ubuntu SMP Mon Nov 23 19:20:19 UTC 2020 x86_64 x86_64
x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 5 Apr 1 17:23

SPEC is set to: /home/SPEC_CPU2017/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv	ext4	196G	82G	104G	45%	/

From /sys/devices/virtual/dmi/id

Vendor:	HPE
Product:	ProLiant DL345 Gen10 Plus
Product Family:	ProLiant
Serial:	J20APP000K

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x UNKNOWN M386AAG40AM3-CWE 128 GB 4 rank 3200
8x UNKNOWN NOT AVAILABLE

BIOS:

BIOS Vendor:	HPE
BIOS Version:	A43
BIOS Date:	02/15/2021
BIOS Revision:	2.40

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.65 GHz, AMD EPYC 7413)

SPECspeed®2017_fp_base = 129

SPECspeed®2017_fp_peak = 132

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Platform Notes (Continued)

Firmware Revision: 2.40

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
| 644.nab_s(base, peak)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu
Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu
Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu
Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
=====

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
| 654.roms_s(base, peak)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu
Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.65 GHz, AMD EPYC 7413)

SPECspeed®2017_fp_base = 129

SPECspeed®2017_fp_peak = 132

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Compiler Version Notes (Continued)

```

=====
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
=====

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

607.cactuBSSN_s: -DSPEC_LP64

619.lbm_s: -DSPEC_LP64

621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64

628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

638.imagick_s: -DSPEC_LP64

644.nab_s: -DSPEC_LP64

649.fotonik3d_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.65 GHz, AMD EPYC 7413)

SPECSpeed®2017_fp_base = 129

SPECSpeed®2017_fp_peak = 132

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Base Portability Flags (Continued)

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.65 GHz, AMD EPYC 7413)

SPECspeed®2017_fp_base = 129

SPECspeed®2017_fp_peak = 132

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

-lflang -lflangrti

Benchmarks using Fortran, C, and C++:

-m64 -mno-adx -mno-sse4a -std=c++98
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument -Wno-return-type

Peak Compiler Invocation

C benchmarks:

clang

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.65 GHz, AMD EPYC 7413)

SPECspeed®2017_fp_base = 129

SPECspeed®2017_fp_peak = 132

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Peak Compiler Invocation (Continued)

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```

619.lbm_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=5 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

638.imagick_s: basepeak = yes

644.nab_s: -m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -freemap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.65 GHz, AMD EPYC 7413)

SPECspeed®2017_fp_base = 129

SPECspeed®2017_fp_peak = 132

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Peak Optimization Flags (Continued)

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

```
654.roms_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang
```

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-m64 -mno-adx -mno-sse4a -std=c++98
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-fininline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -Mrecursive -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.65 GHz, AMD EPYC 7413)

SPECspeed®2017_fp_base = 129

SPECspeed®2017_fp_peak = 132

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument -Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revP.html>

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revP.xml>

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2020-04-01 16:02:44-0400.
Report generated on 2021-04-27 16:23:43 by CPU2017 PDF formatter v6442.
Originally published on 2021-04-27.