



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge MX750c (Intel Xeon Platinum 8352V, 2.10 GHz)

**SPECrate®2017\_fp\_base = 195**

**SPECrate®2017\_fp\_peak = 208**

CPU2017 License: 55


Test Date: Apr-2021

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2021

Tested by: Dell Inc.

Software Availability: Feb-2021

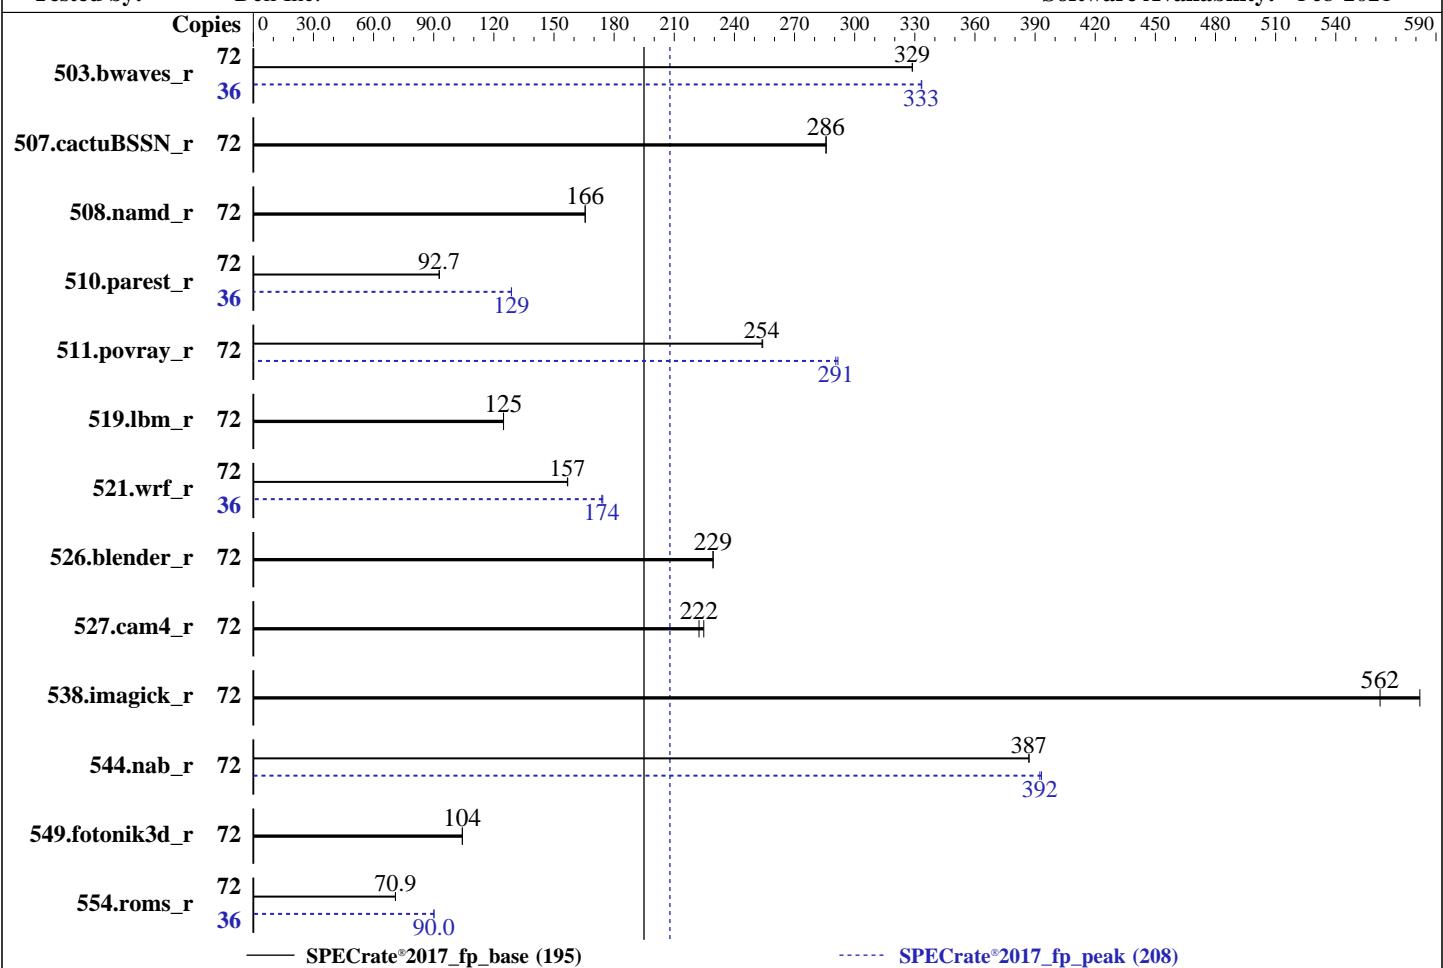

## Hardware

CPU Name: Intel Xeon Platinum 8352V  
 Max MHz: 3500  
 Nominal: 2100  
 Enabled: 36 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 54 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC4-3200AA-R, running at 2933)  
 Storage: 125 GB on tmpfs  
 Other: None

OS:

Red Hat Enterprise Linux 8.2 (Ootpa)  
4.18.0-193.el8.x86\_64

Compiler:  
 C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;  
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux

Parallel:

No

Firmware:

Version 1.1.2 released Apr-2021

File System:

tmpfs

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

64-bit

Other:

jemalloc memory allocator V5.0.1

Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX750c (Intel Xeon Platinum 8352V, 2.10 GHz)

SPECrate®2017\_fp\_base = 195

SPECrate®2017\_fp\_peak = 208

CPU2017 License: 55

Test Date: Apr-2021

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2021

Tested by: Dell Inc.

Software Availability: Feb-2021

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	72	2196	329	<b><u>2197</u></b>	<b><u>329</u></b>			36	1083	333	<b><u>1083</u></b>	<b><u>333</u></b>				
507.cactuBSSN_r	72	319	286	<b><u>319</u></b>	<b><u>286</u></b>			72	319	286	<b><u>319</u></b>	<b><u>286</u></b>				
508.namd_r	72	<b><u>413</u></b>	<b><u>166</u></b>	413	166			72	<b><u>413</u></b>	<b><u>166</u></b>	413	166				
510.parest_r	72	<b><u>2032</u></b>	<b><u>92.7</u></b>	2029	92.8			36	<b><u>732</u></b>	<b><u>129</u></b>	731	129				
511.povray_r	72	<b><u>663</u></b>	<b><u>254</u></b>	662	254			72	576	292	<b><u>579</u></b>	<b><u>291</u></b>				
519.lbm_r	72	608	125	<b><u>608</u></b>	<b><u>125</u></b>			72	608	125	<b><u>608</u></b>	<b><u>125</u></b>				
521.wrf_r	72	1028	157	<b><u>1029</u></b>	<b><u>157</u></b>			36	<b><u>464</u></b>	<b><u>174</u></b>	463	174				
526.blender_r	72	<b><u>478</u></b>	<b><u>229</u></b>	478	229			72	<b><u>478</u></b>	<b><u>229</u></b>	478	229				
527.cam4_r	72	560	225	<b><u>566</u></b>	<b><u>222</u></b>			72	560	225	<b><u>566</u></b>	<b><u>222</u></b>				
538.imagick_r	72	<b><u>319</u></b>	<b><u>562</u></b>	308	582			72	<b><u>319</u></b>	<b><u>562</u></b>	308	582				
544.nab_r	72	<b><u>313</u></b>	<b><u>387</u></b>	313	387			72	<b><u>309</u></b>	<b><u>392</u></b>	308	393				
549.fotonik3d_r	72	2690	104	<b><u>2692</u></b>	<b><u>104</u></b>			72	2690	104	<b><u>2692</u></b>	<b><u>104</u></b>				
554.roms_r	72	<b><u>1614</u></b>	<b><u>70.9</u></b>	1614	70.9			36	<b><u>635</u></b>	<b><u>90.0</u></b>	634	90.2				

SPECrate®2017\_fp\_base = 195

SPECrate®2017\_fp\_peak = 208

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/mnt/ramdisk/cpu2017-1.1.7-ic2021.1/lib/intel64:/mnt/ramdisk/cpu2017-1.
    1.7-ic2021.1/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX750c (Intel Xeon Platinum 8352V, 2.10 GHz)

SPECrate®2017\_fp\_base = 195

SPECrate®2017\_fp\_peak = 208

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: Apr-2021

Software Availability: Feb-2021

## General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS Settings:

Sub NUMA Cluster : 2-Way Clustering

Virtualization Technology : Disabled

System Profile : Custom

CPU Power Management : Maximum Performance

C1E : Disabled

C States : Autonomous

Memory Patrol Scrub : Disabled

Energy Efficiency Policy : Performance

CPU Interconnect Bus Link

Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.7-ic2021.1/bin/sysinfo

Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c

running on localhost.localdomain Sat Apr 24 08:27:55 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8352V CPU @ 2.10GHz

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX750c (Intel Xeon Platinum 8352V, 2.10 GHz)

SPECrate®2017\_fp\_base = 195

SPECrate®2017\_fp\_peak = 208

CPU2017 License: 55

Test Date: Apr-2021

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2021

Tested by: Dell Inc.

Software Availability: Feb-2021

## Platform Notes (Continued)

```
1 "physical id"s (chips)
72 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 36
siblings : 72
physical 0: cores 0 1 2 3 4 5 6 7 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25
26 27 28 29 30 31 32 33 34 35
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                72
On-line CPU(s) list:  0-71
Thread(s) per core:   2
Core(s) per socket:   36
Socket(s):             1
NUMA node(s):          1
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 106
Model name:            Intel(R) Xeon(R) Platinum 8352V CPU @ 2.10GHz
Stepping:               6
CPU MHz:               2669.416
BogoMIPS:              4200.00
Virtualization:        VT-x
L1d cache:             48K
L1i cache:             32K
L2 cache:              1280K
L3 cache:              55296K
NUMA node0 CPU(s):    0-71
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local wbnoinvd dtherm ida arat pln pts avx512vbmi umip pkru ospke
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid md_clear pconfig flush_lld arch_capabilities
```

/proc/cpuinfo cache data

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX750c (Intel Xeon Platinum 8352V, 2.10 GHz)

SPECrate®2017\_fp\_base = 195

SPECrate®2017\_fp\_peak = 208

CPU2017 License: 55

Test Date: Apr-2021

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2021

Tested by: Dell Inc.

Software Availability: Feb-2021

## Platform Notes (Continued)

cache size : 55296 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56
57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
node 0 size: 515445 MB
node 0 free: 473496 MB
node distances:
node 0
0: 10
```

From /proc/meminfo

```
MemTotal:      527815820 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

/sbin/tuned-adm active

Current active profile: throughput-performance

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.2 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.2"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga
```

uname -a:

```
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX750c (Intel Xeon Platinum 8352V, 2.10 GHz)

SPECrate®2017\_fp\_base = 195

SPECrate®2017\_fp\_peak = 208

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: Apr-2021

Software Availability: Feb-2021

## Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1):

Bypass disabled via prctl and seccomp

Mitigation: usercopy/swapgs barriers and \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): No status reported

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Apr 24 02:32

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.7-ic2021.1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	125G	36G	90G	29%	/mnt/ramdisk

From /sys/devices/virtual/dmi/id

Vendor:	Dell Inc.
Product:	PowerEdge MX750c
Product Family:	PowerEdge
Serial:	1234567

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x	00AD063200AD	HMA84GR7CJR4N-XN	32 GB	2 rank	3200, configured at 2933
4x	00AD063200AD	HMAA4GR7AJR8N-XN	32 GB	2 rank	3200, configured at 2933
16x	Not Specified	Not Specified			

BIOS:

BIOS Vendor:	Dell Inc.
BIOS Version:	1.1.2
BIOS Date:	04/09/2021
BIOS Revision:	1.1

(End of data from sysinfo program)

## Compiler Version Notes

=====

C	519.lbm_r(base, peak) 538.imagick_r(base, peak)
	544.nab_r(base, peak)

=====

-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX750c (Intel Xeon Platinum 8352V, 2.10 GHz)

SPECrate®2017\_fp\_base = 195

SPECrate®2017\_fp\_peak = 208

CPU2017 License: 55

Test Date: Apr-2021

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2021

Tested by: Dell Inc.

Software Availability: Feb-2021

## Compiler Version Notes (Continued)

Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray\_r(peak)

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray\_r(peak)

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX750c (Intel Xeon Platinum 8352V, 2.10 GHz)

SPECrate®2017\_fp\_base = 195

SPECrate®2017\_fp\_peak = 208

CPU2017 License: 55

Test Date: Apr-2021

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2021

Tested by: Dell Inc.

Software Availability: Feb-2021

## Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf\_r(peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX750c (Intel Xeon Platinum 8352V, 2.10 GHz)

SPECrate®2017\_fp\_base = 195

SPECrate®2017\_fp\_peak = 208

CPU2017 License: 55

Test Date: Apr-2021

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2021

Tested by: Dell Inc.

Software Availability: Feb-2021

## Compiler Version Notes (Continued)

Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf\_r(peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX750c (Intel Xeon Platinum 8352V, 2.10 GHz)

SPECrate®2017\_fp\_base = 195

SPECrate®2017\_fp\_peak = 208

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: Apr-2021

Software Availability: Feb-2021

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactusBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX750c (Intel Xeon Platinum 8352V, 2.10 GHz)

SPECrate®2017\_fp\_base = 195

SPECrate®2017\_fp\_peak = 208

CPU2017 License: 55

Test Date: Apr-2021

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2021

Tested by: Dell Inc.

Software Availability: Feb-2021

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

521.wrf\_r: ifort icc

527.cam4\_r: ifort icx

Benchmarks using both C and C++:

511.povray\_r: icpc icc

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX750c (Intel Xeon Platinum 8352V, 2.10 GHz)

SPECrate®2017\_fp\_base = 195

SPECrate®2017\_fp\_peak = 208

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: Apr-2021

Software Availability: Feb-2021

## Peak Compiler Invocation (Continued)

526.blender\_r: icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -festo  
-Ofast -qopt-mem-layout-trans=4  
-fimf-accuracy-bits=14:sqrt  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-festo -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -mbranches-within-32B-boundaries  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX750c (Intel Xeon Platinum 8352V, 2.10 GHz)

SPECrate®2017\_fp\_base = 195

SPECrate®2017\_fp\_peak = 208

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: Apr-2021

Software Availability: Feb-2021

## Peak Optimization Flags (Continued)

549.fotonik3d\_r: basepeak = yes

554.roms\_r: Same as 503.bwaves\_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.0.2021-05-18.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.0.2021-05-18.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.7 on 2021-04-24 09:27:53-0400.

Report generated on 2021-05-18 19:38:01 by CPU2017 PDF formatter v6442.

Originally published on 2021-05-18.