SPEC CPU®2017 Floating Point Rate Result

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D53XQ-2U

SPECrate®2017_fp_base = 454

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9050
Test Sponsor: Quanta Computer Inc.
Tested by: Quanta Computer Inc.

Test Date: Jun-2021
Hardware Availability: Mar-2021
Software Availability: Dec-2020

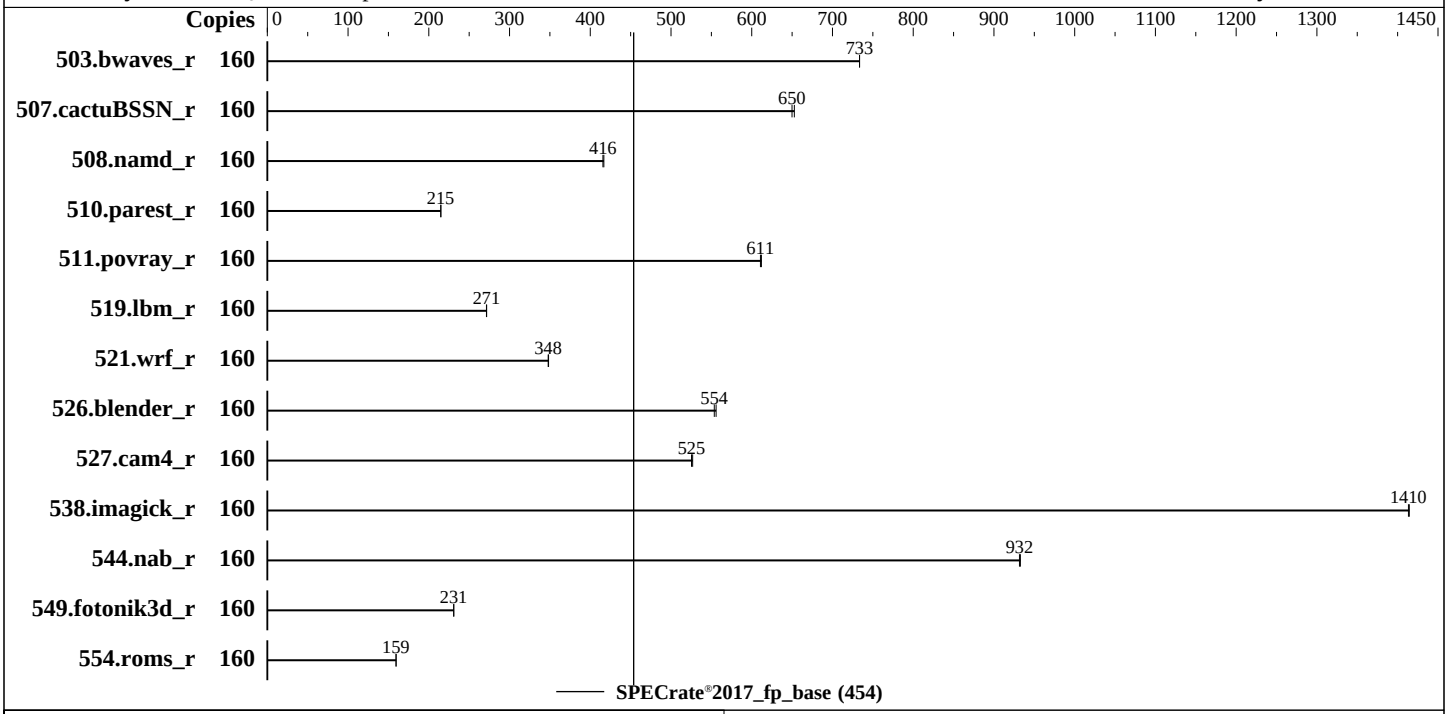

Hardware

CPU Name:	Intel Xeon Platinum 8380
Max MHz:	3400
Nominal:	2300
Enabled:	80 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1.25 MB I+D on chip per core
L3:	60 MB I+D on chip per chip
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)
Storage:	1 x 1 TB PCIe 3.0x4 SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux release 8.2 (Ootpa) kernel 4.18.0-193.el8.x86_64
Compiler:	C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux; Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux; C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
Parallel:	No
Firmware:	Version 3A12 released May-2021
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	160	**2187**	**733**	2187	734									
507.cactuBSSN_r	160	310	653	**312**	**650**									
508.namd_r	160	**366**	**416**	365	417									
510.parest_r	160	**1949**	**215**	1947	215									
511.povray_r	160	610	612	**612**	**611**									
519.lbm_r	160	621	272	**621**	**271**									
521.wrf_r	160	1029	348	**1030**	**348**									
526.blender_r	160	**440**	**554**	438	556									
527.cam4_r	160	531	527	**533**	**525**									
538.imagick_r	160	**282**	**1410**	281	1410									
544.nab_r	160	289	933	**289**	**932**									
549.fotonik3d_r	160	**2702**	**231**	2699	231									
554.roms_r	160	1594	160	**1595**	**159**									

SPECrate®2017_fp_base = 454

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/speccpu2017-newbinary/lib/intel64:/home/speccpu2017-newbinary/je5
     .0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Red Hat Enterprise Linux 8.1
Transparent Huge Pages enabled by default
```

(Continued on next page)

General Notes (Continued)

```
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configuration:
 SNC (Sub NUMA) set to Enabled
 LLC Prefetch set to Enabled
 LLC Dead Line Allocation set to Disabled
 Patrol Scrub set to Disabled

 Sysinfo program /home/speccpu2017-newbinary/bin/sysinfo
 Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
 running on 192-168-133-90 Tue Jun  8 02:06:19 2021

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
       2  "physical id"s (chips)
       160 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 40
       siblings  : 80
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35 36 37 38 39
       physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35 36 37 38 39

 From lscpu:
      Architecture:        x86_64
```

(Continued on next page)

Platform Notes (Continued)

```
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      CPU(s):              160
      On-line CPU(s) list: 0-159
      Thread(s) per core:  2
      Core(s) per socket:  40
      Socket(s):           2
      NUMA node(s):        4
      Vendor ID:           GenuineIntel
      CPU family:          6
      Model:               106
      Model name:          Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
      Stepping:            6
      CPU MHz:             3000.000
      CPU max MHz:         3400.0000
      CPU min MHz:         800.0000
      BogoMIPS:            4600.00
      Virtualization:      VT-x
      L1d cache:           48K
      L1i cache:           32K
      L2 cache:            1280K
      L3 cache:            61440K
      NUMA node0 CPU(s):   0-19,80-99
      NUMA node1 CPU(s):   20-39,100-119
      NUMA node2 CPU(s):   40-59,120-139
      NUMA node3 CPU(s):   60-79,140-159
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
      mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
      tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq
      rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
      avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
      hwp_pkg_req avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
      avx512_bitalg tme avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d
      arch_capabilities

  /proc/cpuinfo cache data
     cache size : 61440 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 4 nodes (0-3)
```

(Continued on next page)

Platform Notes (Continued)

```
  node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 80 81 82 83 84 85 86 87
  88 89 90 91 92 93 94 95 96 97 98 99
  node 0 size: 128254 MB
  node 0 free: 127691 MB
  node 1 cpus: 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 100 101 102
  103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119
  node 1 size: 129015 MB
  node 1 free: 120302 MB
  node 2 cpus: 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 120 121 122
  123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139
  node 2 size: 129015 MB
  node 2 free: 128745 MB
  node 3 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 140 141 142
  143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159
  node 3 size: 129010 MB
  node 3 free: 128736 MB
  node distances:
  node   0   1   2   3
    0:  10  11  20  20
    1:  11  10  20  20
    2:  20  20  10  11
    3:  20  20  11  10

From /proc/meminfo
   MemTotal:       527662628 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sbin/tuned-adm active
    Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux"
      VERSION="8.2 (Ootpa)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="8.2"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
   system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga
```

(Continued on next page)

Platform Notes (Continued)

```
uname -a:
   Linux 192-168-133-90 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020 x86_64
   x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                          Not affected
CVE-2018-3620 (L1 Terminal Fault):                       Not affected
Microarchitectural Data Sampling:                        Not affected
CVE-2017-5754 (Meltdown):                                Not affected
CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                         Bypass disabled via prctl and
                                                         seccomp
CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                         barriers and __user pointer
                                                         sanitization
CVE-2017-5715 (Spectre variant 2):                      Mitigation: Enhanced IBRS, IBPB:
                                                         conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): No status reported
CVE-2019-11135 (TSX Asynchronous Abort):                 Not affected

run-level 3 Jun 8 02:04

SPEC is set to: /home/speccpu2017-newbinary
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/nvme0n1p3 xfs   698G  154G  545G  22% /home

From /sys/devices/virtual/dmi/id
    Vendor:         Quanta Cloud Technology Inc.
    Product:        QuantaGrid D53XQ-2U

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    16x NO DIMM NO DIMM
    16x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200

BIOS:
   BIOS Vendor:       INSYDE Corp.
   BIOS Version:      3A12
   BIOS Date:         05/10/2021
   BIOS Revision:     5.42
   Firmware Revision: 3.33
```

(Continued on next page)

Platform Notes (Continued)

```
 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```


(Continued on next page)

Compiler Version Notes (Continued)

```
Fortran         | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-Whitley-Platform-Settings-V1.2.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-Whitley-Platform-Settings-V1.2.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2021-06-07 14:06:18-0400.
Report generated on 2021-06-22 17:07:56 by CPU2017 PDF formatter v6442.
Originally published on 2021-06-22.