



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DIT400TR-48RL
(2.20 GHz, Intel Xeon Silver 4214)

SPECspeed®2017_int_base = 9.05

SPECspeed®2017_int_peak = 9.27

CPU2017 License: 006042


Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2019

Software Availability: Jun-2021

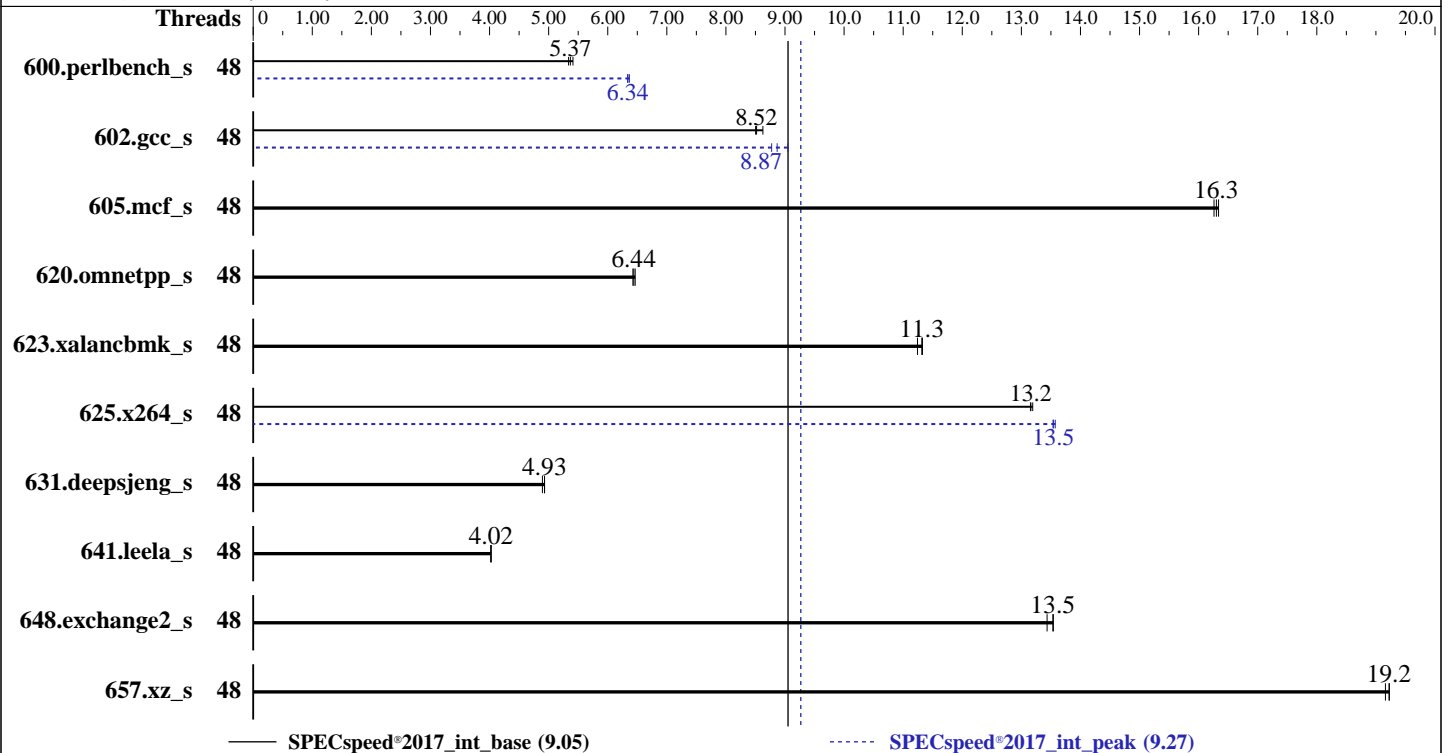

Hardware

CPU Name: Intel Xeon Silver 4214
 Max MHz: 3200
 Nominal: 2200
 Enabled: 24 cores, 2 chips, 2 threads/core
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 16.5 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933P-R, running at 2400)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: CentOS Linux release 8.4.2105
 Kernel 4.18.0-305.3.1.el8.x86_64
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
 Parallel: Yes
 Firmware: Version V8.104 released Jul-2021
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DIT400TR-48RL
(2.20 GHz, Intel Xeon Silver 4214)

SPECspeed®2017_int_base = 9.05

SPECspeed®2017_int_peak = 9.27

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2019

Software Availability: Jun-2021

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	48	<u>331</u>	<u>5.37</u>	333	5.34	328	5.41	48	<u>280</u>	<u>6.34</u>	279	6.37	280	6.34
602.gcc_s	48	468	8.50	<u>467</u>	<u>8.52</u>	462	8.63	48	<u>449</u>	<u>8.87</u>	454	8.77	440	9.05
605.mcf_s	48	289	16.3	<u>290</u>	<u>16.3</u>	290	16.3	48	289	16.3	<u>290</u>	<u>16.3</u>	290	16.3
620.omnetpp_s	48	252	6.46	<u>253</u>	<u>6.44</u>	254	6.43	48	252	6.46	<u>253</u>	<u>6.44</u>	254	6.43
623.xalancbmk_s	48	<u>125</u>	<u>11.3</u>	126	11.2	125	11.3	48	<u>125</u>	<u>11.3</u>	126	11.2	125	11.3
625.x264_s	48	134	13.2	<u>134</u>	<u>13.2</u>	134	13.2	48	130	13.6	<u>130</u>	<u>13.5</u>	130	13.5
631.deepsjeng_s	48	293	4.89	<u>291</u>	<u>4.93</u>	291	4.93	48	293	4.89	<u>291</u>	<u>4.93</u>	291	4.93
641.leela_s	48	424	4.02	<u>424</u>	<u>4.02</u>	424	4.03	48	424	4.02	<u>424</u>	<u>4.02</u>	424	4.03
648.exchange2_s	48	217	13.5	<u>217</u>	<u>13.5</u>	219	13.4	48	217	13.5	<u>217</u>	<u>13.5</u>	219	13.4
657.xz_s	48	323	19.2	322	19.2	<u>322</u>	<u>19.2</u>	48	323	19.2	322	19.2	<u>322</u>	<u>19.2</u>

SPECspeed®2017_int_base = **9.05**

SPECspeed®2017_int_peak = **9.27**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled locally by Netweb
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DIT400TR-48RL
(2.20 GHz, Intel Xeon Silver 4214)

SPECspeed®2017_int_base = 9.05

SPECspeed®2017_int_peak = 9.27

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2019

Software Availability: Jun-2021

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Power Technology set to Custom

Power Performance Tuning set to BIOS Controls EPB

ENERGY_PERF_BIAS_CFG mode set to Performance

LLC Dead Line Alloc set to Disable

sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on localhost.localdomain Thu Aug 12 23:32:37 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4214 CPU @ 2.20GHz

2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 24

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13

From lscpu from util-linux 2.32.1:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 48

On-line CPU(s) list: 0-47

Thread(s) per core: 2

Core(s) per socket: 12

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DIT400TR-48RL
(2.20 GHz, Intel Xeon Silver 4214)

SPECspeed®2017_int_base = 9.05

SPECspeed®2017_int_peak = 9.27

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2019

Software Availability: Jun-2021

Platform Notes (Continued)

```

Socket(s):                2
NUMA node(s):            2
Vendor ID:               GenuineIntel
BIOS Vendor ID:         Intel(R) Corporation
CPU family:              6
Model:                   85
Model name:              Intel(R) Xeon(R) Silver 4214 CPU @ 2.20GHz
BIOS Model name:        Intel(R) Xeon(R) Silver 4214 CPU @ 2.20GHz
Stepping:                7
CPU MHz:                 1000.042
CPU max MHz:             3200.0000
CPU min MHz:             1000.0000
BogoMIPS:                4400.00
Virtualization:         VT-x
L1d cache:               32K
L1i cache:               32K
L2 cache:                1024K
L3 cache:                16896K
NUMA node0 CPU(s):      0-11,24-35
NUMA node1 CPU(s):      12-23,36-47
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms
invpcid cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt
avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp
hwp_pkg_req pku ospke avx512_vnni md_clear flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 16896 KB

```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 24 25 26 27 28 29 30 31 32 33 34 35
node 0 size: 192070 MB
node 0 free: 172665 MB
node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23 36 37 38 39 40 41 42 43 44 45 46 47
node 1 size: 193530 MB
node 1 free: 175835 MB
node distances:
node  0  1

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DIT400TR-48RL
(2.20 GHz, Intel Xeon Silver 4214)

SPECspeed®2017_int_base = 9.05

SPECspeed®2017_int_peak = 9.27

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2019

Software Availability: Jun-2021

Platform Notes (Continued)

```
0: 10 21
1: 21 10
```

From /proc/meminfo

MemTotal: 394855532 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

From /etc/*release* /etc/*version*

centos-release: CentOS Linux release 8.4.2105

centos-release-upstream: Derived from Red Hat Enterprise Linux 8.4

os-release:

NAME="CentOS Linux"

VERSION="8"

ID="centos"

ID_LIKE="rhel fedora"

VERSION_ID="8"

PLATFORM_ID="platform:el8"

PRETTY_NAME="CentOS Linux 8"

ANSI_COLOR="0;31"

redhat-release: CentOS Linux release 8.4.2105

system-release: CentOS Linux release 8.4.2105

system-release-cpe: cpe:/o:centos:centos:8

uname -a:

Linux localhost.localdomain 4.18.0-305.3.1.el8.x86_64 #1 SMP Tue Jun 1 16:14:33 UTC
2021 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

CVE-2018-3620 (L1 Terminal Fault):

Microarchitectural Data Sampling:

CVE-2017-5754 (Meltdown):

CVE-2018-3639 (Speculative Store Bypass):

KVM: Mitigation: Split huge pages

Not affected

Not affected

Not affected

Mitigation: Speculative Store

Bypass disabled via prctl and

seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swaps

barriers and __user pointer

sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero DIT400TR-48RL
(2.20 GHz, Intel Xeon Silver 4214)

SPECspeed®2017_int_base = 9.05

SPECspeed®2017_int_peak = 9.27

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Aug-2021
Hardware Availability: Apr-2019
Software Availability: Jun-2021

Platform Notes (Continued)

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Mitigation: TSX disabled
conditional, RSB filling

run-level 3 Aug 11 21:05

SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/cl-home xfs 372G 78G 295G 21% /home

From /sys/devices/virtual/dmi/id
Vendor: Tyrone Systems
Product: Tyrone Camarero DIT400TR-48RL
Product Family: empty
Serial: empty

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2400

BIOS:
BIOS Vendor: American Megatrends Inc.
BIOS Version: V8.104
BIOS Date: 07/27/2021
BIOS Revision: 5.14
Firmware Revision: 6.1

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C      | 600.perlbench_s(peak)
-----
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
C      | 600.perlbench_s(base) 602.gcc_s(base, peak) 605.mcf_s(base, peak)
      | 625.x264_s(base, peak) 657.xz_s(base, peak)
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DIT400TR-48RL
(2.20 GHz, Intel Xeon Silver 4214)

SPECspeed®2017_int_base = 9.05

SPECspeed®2017_int_peak = 9.27

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2019

Software Availability: Jun-2021

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 600.perlbench_s(peak)
=====

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 600.perlbench_s(base) 602.gcc_s(base, peak) 605.mcf_s(base, peak)
| 625.x264_s(base, peak) 657.xz_s(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
| 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 648.exchange2_s(base, peak)
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DIT400TR-48RL
(2.20 GHz, Intel Xeon Silver 4214)

SPECspeed®2017_int_base = 9.05

SPECspeed®2017_int_peak = 9.27

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2019

Software Availability: Jun-2021

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-DSPEC_OPENMP -std=c11 -m64 -fiopenmp -Wl,-z,muldefs -xCORE-AVX512
-O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-DSPEC_OPENMP -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin/
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-mbranches-within-32B-boundaries
```




SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DIT400TR-48RL
(2.20 GHz, Intel Xeon Silver 4214)

SPECspeed®2017_int_base = 9.05

SPECspeed®2017_int_peak = 9.27

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2019

Software Availability: Jun-2021

Peak Compiler Invocation

C benchmarks (except as noted below):

icx

600.perlbench_s: icc

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
605.mcf_s: basepeak = yes
```

```
625.x264_s: -DSPEC_OPENMP -fiopenmp -std=c11 -m64 -Wl,-z,muldefs
-xCORE-AVX512 -flto -O3 -ffast-math
-qopt-mem-layout-trans=4 -fno-alias
-mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
657.xz_s: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DIT400TR-48RL
(2.20 GHz, Intel Xeon Silver 4214)

SPECspeed®2017_int_base = 9.05

SPECspeed®2017_int_peak = 9.27

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2019

Software Availability: Jun-2021

Peak Optimization Flags (Continued)

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-CLX-revI.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-CLX-revI.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-08-12 23:32:37-0400.

Report generated on 2021-09-20 13:58:25 by CPU2017 PDF formatter v6442.

Originally published on 2021-09-20.