



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 11.6

ThinkEdge SE450  
(2.20 GHz, Intel Xeon Platinum 8352Y)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Date: Feb-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2021

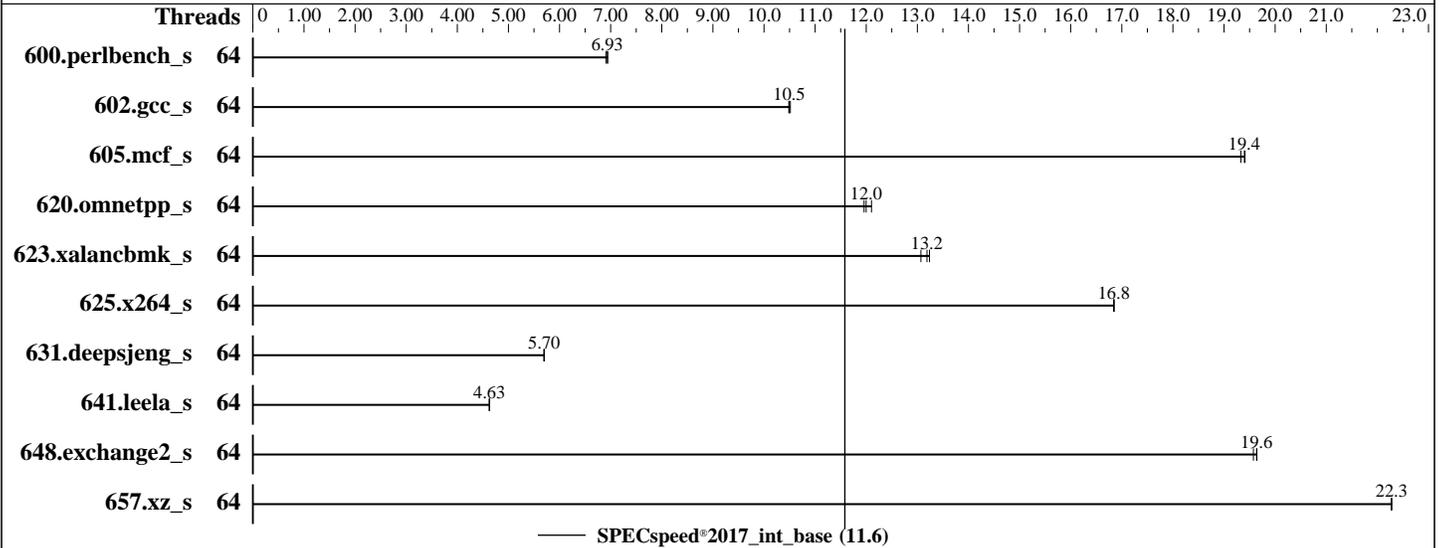

### Hardware

CPU Name: Intel Xeon Platinum 8352Y  
 Max MHz: 3400  
 Nominal: 2200  
 Enabled: 32 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 48 MB I+D on chip per chip  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 8.5 (Ootpa)  
 Kernel 4.18.0-348.el8.x86\_64  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version CME103F 1.01 released Feb-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkEdge SE450  
(2.20 GHz, Intel Xeon Platinum 8352Y)

SPECSpeed®2017\_int\_base = 11.6

SPECSpeed®2017\_int\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Feb-2022  
Hardware Availability: Apr-2022  
Software Availability: Nov-2021

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	257	6.91	256	6.94	<b>256</b>	<b>6.93</b>							
602.gcc_s	64	379	10.5	<b>379</b>	<b>10.5</b>	380	10.5							
605.mcf_s	64	<b>243</b>	<b>19.4</b>	244	19.3	243	19.4							
620.omnetpp_s	64	136	12.0	<b>136</b>	<b>12.0</b>	135	12.1							
623.xalancbmk_s	64	107	13.2	<b>107</b>	<b>13.2</b>	108	13.1							
625.x264_s	64	105	16.8	<b>105</b>	<b>16.8</b>	105	16.8							
631.deepsjeng_s	64	252	5.70	<b>251</b>	<b>5.70</b>	251	5.70							
641.leela_s	64	<b>369</b>	<b>4.63</b>	369	4.63	369	4.63							
648.exchange2_s	64	150	19.6	150	19.6	<b>150</b>	<b>19.6</b>							
657.xz_s	64	277	22.3	<b>278</b>	<b>22.3</b>	278	22.3							

SPECSpeed®2017\_int\_base = 11.6

SPECSpeed®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH =  
"/home/cpu2017-1.1.8-ic2021.1-revB/lib/intel64:/home/cpu2017-1.1.8-ic2021.1-revB/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 11.6

ThinkEdge SE450  
(2.20 GHz, Intel Xeon Platinum 8352Y)

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Feb-2022

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Apr-2022

**Tested by:** Lenovo Global Technology

**Software Availability:** Nov-2021

### General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:  
 Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
 C-States set to Autonomous  
 CPU P-state Control set to Autonomous  
 Adjacent Cache Prefetch set to Disabled

```
Sysinfo program /home/cpu2017-1.1.8-ic2021.1-revB/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Thu Feb 24 07:13:59 2022
```

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see <https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8352Y CPU @ 2.20GHz
 1 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
```

```
From lscpu from util-linux 2.32.1:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 64
On-line CPU(s) list: 0-63
Thread(s) per core: 2
Core(s) per socket: 32
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 11.6

ThinkEdge SE450  
(2.20 GHz, Intel Xeon Platinum 8352Y)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2021

### Platform Notes (Continued)

```

Socket(s): 1
NUMA node(s): 1
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Platinum 8352Y CPU @ 2.20GHz
BIOS Model name: Intel(R) Xeon(R) Platinum 8352Y CPU @ 2.20GHz
Stepping: 6
CPU MHz: 2200.000
BogoMIPS: 4400.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 49152K
NUMA node0 CPU(s): 0-63
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
vpid ept_ad fsgsbase tsc_adjust sgx bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a
avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts hwp_epp avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
avx512_vpopcntdq la57 rdpid sgx_lc fsrm md_clear pconfig flush_l1d arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 49152 KB

```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56
57 58 59 60 61 62 63
node 0 size: 257585 MB
node 0 free: 255799 MB
node distances:
node 0
0: 10

```

From /proc/meminfo

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 11.6

ThinkEdge SE450  
(2.20 GHz, Intel Xeon Platinum 8352Y)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2021

### Platform Notes (Continued)

MemTotal: 263767168 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/sbin/tuned-adm active  
Current active profile: throughput-performance

From /etc/\*release\* /etc/\*version\*

os-release:

```
NAME="Red Hat Enterprise Linux"
VERSION="8.5 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.5"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.5 (Ootpa)"
ANSI_COLOR="0;31"
```

```
redhat-release: Red Hat Enterprise Linux release 8.5 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.5 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8::baseos
```

uname -a:

```
Linux localhost.localdomain 4.18.0-348.el8.x86_64 #1 SMP Mon Oct 4 12:17:22 EDT 2021
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-12207 (iTLB Multihit): Not affected
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
Bypass disabled via prctl and
seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swapgs
barriers and __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB:
conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Not affected
```

run-level 3 Feb 24 00:21

```
SPEC is set to: /home/cpu2017-1.1.8-ic2021.1-revB
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda4 xfs 819G 25G 794G 4% /home
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 11.6

ThinkEdge SE450  
(2.20 GHz, Intel Xeon Platinum 8352Y)

SPECspeed®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Nov-2021

### Platform Notes (Continued)

```
From /sys/devices/virtual/dmi/id
Vendor:      Lenovo
Product:     ThinkEdge SE450
Product Family: ThinkSystem
Serial:      1234567890
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
8x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200

```
BIOS:
BIOS Vendor:      Lenovo
BIOS Version:     CME103F-1.01
BIOS Date:        02/10/2022
BIOS Revision:    1.1
Firmware Revision: 1.10
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====  
C      | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base)  
      | 625.x264_s(base) 657.xz_s(base)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====  
C++   | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)  
     | 641.leela_s(base)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====  
Fortran | 648.exchange2_s(base)  
=====
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed®2017\_int\_base = 11.6

ThinkEdge SE450  
(2.20 GHz, Intel Xeon Platinum 8352Y)

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Feb-2022

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Apr-2022

**Tested by:** Lenovo Global Technology

**Software Availability:** Nov-2021

## Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-DSPEC\_OPENMP -std=c11 -m64 -fiopenmp -Wl,-z,muldefs -xCORE-AVX2  
-O3 -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-DSPEC\_OPENMP -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed®2017\_int\_base = 11.6

ThinkEdge SE450  
(2.20 GHz, Intel Xeon Platinum 8352Y)

SPECspeed®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Feb-2022

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Apr-2022

**Tested by:** Lenovo Global Technology

**Software Availability:** Nov-2021

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin/  
-lqkmallocc
```

Fortran benchmarks:

```
-m64 -xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries
```

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-ICElake-J.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-ICElake-J.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-02-23 18:13:58-0500.

Report generated on 2022-03-16 13:59:25 by CPU2017 PDF formatter v6442.

Originally published on 2022-03-16.