



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 280

ThinkSystem SR650 V2  
(2.30 GHz, Intel Xeon Silver 4316)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Date: Mar-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Feb-2021

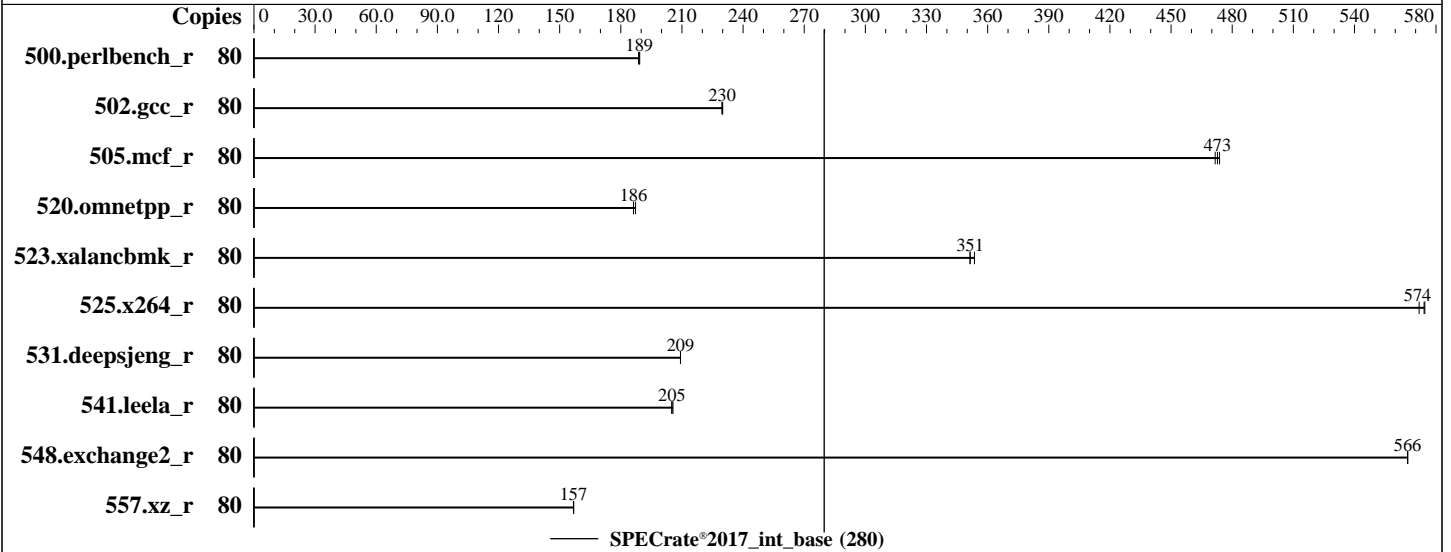

### Hardware

CPU Name: Intel Xeon Silver 4316  
 Max MHz: 3400  
 Nominal: 2300  
 Enabled: 40 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 30 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (32 x 32 GB 2Rx8 PC4-3200AA-R, running at 2666)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.3 (Ootpa)  
 Kernel 4.18.0-240.el8.x86\_64  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux  
 Parallel: No  
 Firmware: Lenovo BIOS Version AFE115K 1.21 released Feb-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 280

ThinkSystem SR650 V2  
(2.30 GHz, Intel Xeon Silver 4316)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Mar-2022  
Hardware Availability: Jul-2021  
Software Availability: Feb-2021

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
500.perlbench_r	80	675	189	<b>674</b>	<b>189</b>	673	189									
502.gcc_r	80	492	230	<b>493</b>	<b>230</b>	493	230									
505.mcf_r	80	273	474	<b>273</b>	<b>473</b>	274	472									
520.omnetpp_r	80	564	186	<b>564</b>	<b>186</b>	561	187									
523.xalancbmk_r	80	240	351	<b>240</b>	<b>351</b>	239	354									
525.x264_r	80	245	572	<b>244</b>	<b>574</b>	244	575									
531.deepsjeng_r	80	438	209	<b>438</b>	<b>209</b>	438	209									
541.leela_r	80	<b>646</b>	<b>205</b>	646	205	644	206									
548.exchange2_r	80	<b>370</b>	<b>566</b>	370	566	370	566									
557.xz_r	80	551	157	551	157	<b>551</b>	<b>157</b>									

SPECrate®2017\_int\_base = 280

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
cpupower set to performance mode
cpupower -c all frequency-set -g performance
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
    "/home/cpu2017-1.1.8-ic2021.1-revB/lib/intel64:/home/cpu2017-1.1.8-ic202
    1.1-revB/lib/ia32:/home/cpu2017-1.1.8-ic2021.1-revB/je5.0.1-32"
MALLOCONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 280

ThinkSystem SR650 V2  
(2.30 GHz, Intel Xeon Silver 4316)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Mar-2022

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Jul-2021

**Tested by:** Lenovo Global Technology

**Software Availability:** Feb-2021

### General Notes (Continued)

Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

C-States set to Legacy

CPU P-state Control set to Legacy

UPI Link Disable set to Disabled 1 Link

DCU Streamer Prefetcher set to Disabled

SNC set to Enabled

Sysinfo program /home/cpu2017-1.1.8-ic2021.1-revB/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost.localdomain Mon Mar 28 17:43:57 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4316 CPU @ 2.30GHz

2 "physical id"s (chips)

80 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 20

siblings : 40

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19

From lscpu from util-linux 2.32.1:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 80

On-line CPU(s) list: 0-79

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 280

ThinkSystem SR650 V2  
(2.30 GHz, Intel Xeon Silver 4316)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Feb-2021

### Platform Notes (Continued)

```

Thread(s) per core: 2
Core(s) per socket: 20
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Silver 4316 CPU @ 2.30GHz
Stepping: 6
CPU MHz: 2053.908
CPU max MHz: 2301.0000
CPU min MHz: 800.0000
BogoMIPS: 4600.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 30720K
NUMA node0 CPU(s): 0-9,40-49
NUMA node1 CPU(s): 10-19,50-59
NUMA node2 CPU(s): 20-29,60-69
NUMA node3 CPU(s): 30-39,70-79
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a
avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
avx512_vpopcntdq la57 rdpid md_clear pconfig flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 30720 KB

```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 40 41 42 43 44 45 46 47 48 49
node 0 size: 252961 MB
node 0 free: 257146 MB
node 1 cpus: 10 11 12 13 14 15 16 17 18 19 50 51 52 53 54 55 56 57 58 59
node 1 size: 253531 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 280

ThinkSystem SR650 V2  
(2.30 GHz, Intel Xeon Silver 4316)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Mar-2022

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Jul-2021

**Tested by:** Lenovo Global Technology

**Software Availability:** Feb-2021

### Platform Notes (Continued)

```
node 1 free: 257771 MB
node 2 cpus: 20 21 22 23 24 25 26 27 28 29 60 61 62 63 64 65 66 67 68 69
node 2 size: 253569 MB
node 2 free: 257647 MB
node 3 cpus: 30 31 32 33 34 35 36 37 38 39 70 71 72 73 74 75 76 77 78 79
node 3 size: 253117 MB
node 3 free: 257656 MB
node distances:
node  0  1  2  3
  0:  10  11  20  20
  1:  11  10  20  20
  2:  20  20  10  11
  3:  20  20  11  10
```

From /proc/meminfo

```
MemTotal:      1056484768 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

/sbin/tuned-adm active

Current active profile: throughput-performance

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

/usr/bin/lsb\_release -d

Red Hat Enterprise Linux release 8.3 (Ootpa)

From /etc/\*release\* /etc/\*version\*

os-release:

```
NAME="Red Hat Enterprise Linux"
VERSION="8.3 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.3"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
ANSI_COLOR="0;31"
```

redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:8.3:ga

uname -a:

```
Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 280

ThinkSystem SR650 V2  
(2.30 GHz, Intel Xeon Silver 4316)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Feb-2021

### Platform Notes (Continued)

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Mar 28 17:42

```
SPEC is set to: /home/cpu2017-1.1.8-ic2021.1-revB
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   818G  161G  657G  20% /home
```

```
From /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         ThinkSystem SR650 V2 MB
Product Family: ThinkSystem
Serial:          1234567890
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
  32x Samsung M393A4G43AB3-CWE 32 GB 2 rank 3200, configured at 2666
```

```
BIOS:
  BIOS Vendor:      Lenovo
  BIOS Version:     AFE115K-1.21
  BIOS Date:        02/15/2022
  BIOS Revision:    1.21
  Firmware Revision: 1.65
```

(End of data from sysinfo program)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate®2017\_int\_base = 280

ThinkSystem SR650 V2  
(2.30 GHz, Intel Xeon Silver 4316)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Mar-2022

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Jul-2021

**Tested by:** Lenovo Global Technology

**Software Availability:** Feb-2021

## Compiler Version Notes

```
=====
C          | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
          | 525.x264_r(base) 557.xz_r(base)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

```
=====
C++       | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
          | 541.leela_r(base)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

```
=====
Fortran   | 548.exchange2_r(base)
=====
```

```
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

## Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifort

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017\_int\_base = 280

ThinkSystem SR650 V2  
(2.30 GHz, Intel Xeon Silver 4316)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Feb-2021

## Base Portability Flags (Continued)

```
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

### C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

### Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-ICElake-J.html>  
[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-ICElake-J.xml>  
[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)





# SPEC CPU<sup>®</sup>2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V2  
(2.30 GHz, Intel Xeon Silver 4316)

SPECrate<sup>®</sup>2017\_int\_base = 280

SPECrate<sup>®</sup>2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2022

**Hardware Availability:** Jul-2021

**Software Availability:** Feb-2021

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU<sup>®</sup>2017 v1.1.8 on 2022-03-28 05:43:56-0400.

Report generated on 2022-04-12 16:20:33 by CPU2017 PDF formatter v6442.

Originally published on 2022-04-12.