



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion


SPECrate®2017_fp_base = 475

xFusion 2488H V6 (Intel Xeon Gold 5318H)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2022
Hardware Availability: Jun-2020
Software Availability: Dec-2021

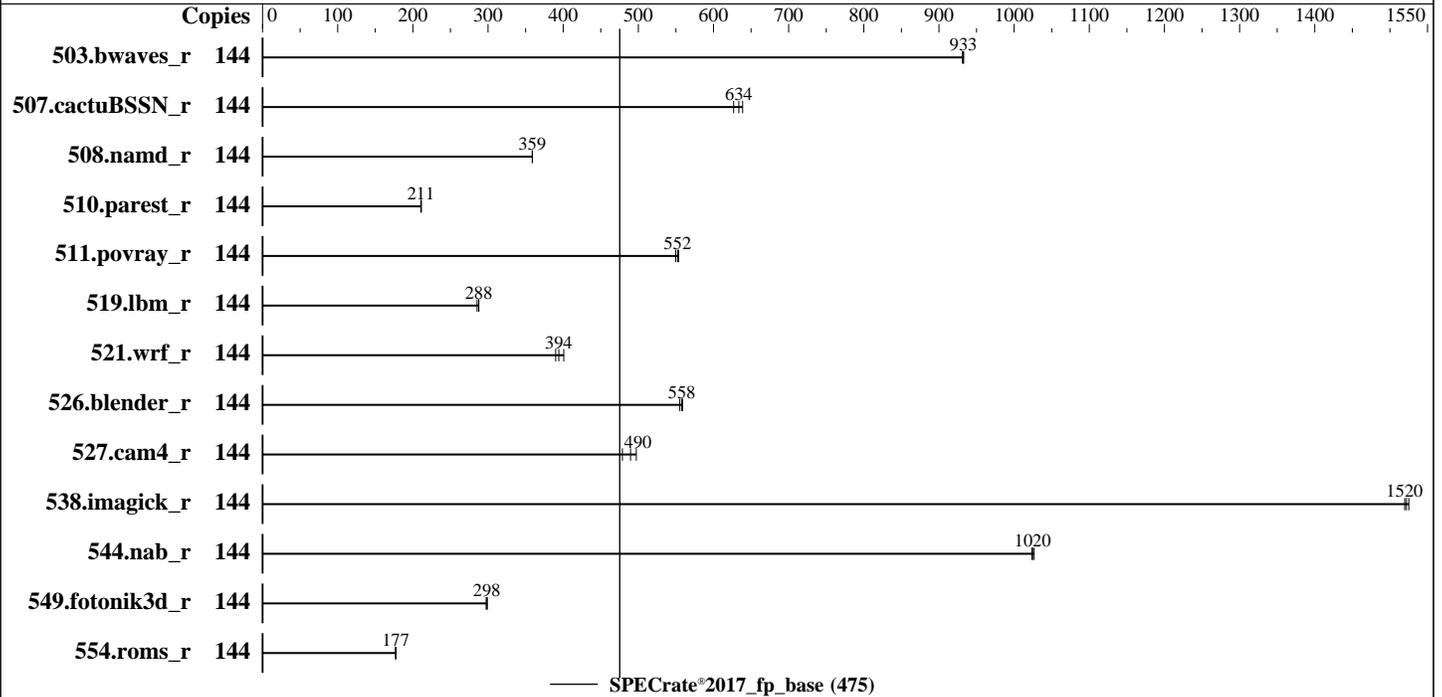

Hardware

CPU Name: Intel Xeon Gold 5318H
 Max MHz: 3800
 Nominal: 2500
 Enabled: 72 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-3200AA-R, running at 2666)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.3 (Ootpa) 4.18.0-240.el8.x86_64
 Compiler: C/C++: Version 2022.0.0 of Intel oneAPI DPC++/C++ Compiler Build 20211123 for Linux; Fortran: Version 2021.5.0 of Intel Fortran Compiler Classic Build 20211109 for Linux
 Parallel: No
 Firmware: Version 0.81 Released Feb-2022
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 475

xFusion 2488H V6 (Intel Xeon Gold 5318H)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2022
Hardware Availability: Jun-2020
Software Availability: Dec-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	144	1548	933	<u>1548</u>	<u>933</u>	1551	931							
507.cactuBSSN_r	144	285	639	291	627	<u>288</u>	<u>634</u>							
508.namd_r	144	<u>381</u>	<u>359</u>	381	359	381	359							
510.parest_r	144	1783	211	<u>1787</u>	<u>211</u>	1788	211							
511.povray_r	144	<u>609</u>	<u>552</u>	607	554	612	550							
519.lbm_r	144	527	288	<u>528</u>	<u>288</u>	532	285							
521.wrf_r	144	<u>818</u>	<u>394</u>	827	390	805	401							
526.blender_r	144	392	559	395	555	<u>393</u>	<u>558</u>							
527.cam4_r	144	506	497	<u>514</u>	<u>490</u>	526	479							
538.imagick_r	144	<u>235</u>	<u>1520</u>	236	1520	235	1530							
544.nab_r	144	<u>237</u>	<u>1020</u>	237	1020	236	1030							
549.fotonik3d_r	144	1877	299	1886	297	<u>1880</u>	<u>298</u>							
554.roms_r	144	1290	177	<u>1291</u>	<u>177</u>	1293	177							

SPECrate®2017_fp_base = 475

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/opt/intel/oneapi/compiler/2022.0.2/linux/compiler/lib/intel64:/spec2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1
Transparent Huge Pages enabled by default

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 475

xFusion 2488H V6 (Intel Xeon Gold 5318H)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2022
Hardware Availability: Jun-2020
Software Availability: Dec-2021

General Notes (Continued)

Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3> /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
 NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
 Performance Profile Set to Performance
 SNC Set to Enabled

Sysinfo program /spec2017/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on localhost.localdomain Wed Apr 13 23:07:08 2022

SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
 model name : Intel(R) Xeon(R) Gold 5318H CPU @ 2.50GHz
 4 "physical id"s (chips)
 144 "processors"
 cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
 cpu cores : 18
 siblings : 36
 physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
 physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
 physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
 physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

From lscpu from util-linux 2.32.1:
 Architecture: x86_64
 CPU op-mode(s): 32-bit, 64-bit
 Byte Order: Little Endian

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 475

xFusion 2488H V6 (Intel Xeon Gold 5318H)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2022
Hardware Availability: Jun-2020
Software Availability: Dec-2021

Platform Notes (Continued)

```

CPU(s): 144
On-line CPU(s) list: 0-143
Thread(s) per core: 2
Core(s) per socket: 18
Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 5318H CPU @ 2.50GHz
Stepping: 11
CPU MHz: 3300.013
BogoMIPS: 5000.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 25344K
NUMA node0 CPU(s): 0-2,5,6,9,10,14,15,72-74,77,78,81,82,86,87
NUMA node1 CPU(s): 3,4,7,8,11-13,16,17,75,76,79,80,83-85,88,89
NUMA node2 CPU(s): 18-20,23,24,27,28,32,33,90-92,95,96,99,100,104,105
NUMA node3 CPU(s): 21,22,25,26,29-31,34,35,93,94,97,98,101-103,106,107
NUMA node4 CPU(s): 36-38,41,42,45,46,50,51,108-110,113,114,117,118,122,123
NUMA node5 CPU(s): 39,40,43,44,47-49,52,53,111,112,115,116,119-121,124,125
NUMA node6 CPU(s): 54-56,59,60,63,64,68,69,126-128,131,132,135,136,140,141
NUMA node7 CPU(s): 57,58,61,62,65-67,70,71,129,130,133,134,137-139,142,143
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd
mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
avx512_bf16 dtherm ida arat pln pts hwp_epp pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 5 6 9 10 14 15 72 73 74 77 78 81 82 86 87
node 0 size: 185098 MB
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 475

xFusion 2488H V6 (Intel Xeon Gold 5318H)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2022
Hardware Availability: Jun-2020
Software Availability: Dec-2021

Platform Notes (Continued)

```

node 0 free: 191049 MB
node 1 cpus: 3 4 7 8 11 12 13 16 17 75 76 79 80 83 84 85 88 89
node 1 size: 186735 MB
node 1 free: 193314 MB
node 2 cpus: 18 19 20 23 24 27 28 32 33 90 91 92 95 96 99 100 104 105
node 2 size: 187965 MB
node 2 free: 193220 MB
node 3 cpus: 21 22 25 26 29 30 31 34 35 93 94 97 98 101 102 103 106 107
node 3 size: 187723 MB
node 3 free: 193273 MB
node 4 cpus: 36 37 38 41 42 45 46 50 51 108 109 110 113 114 117 118 122 123
node 4 size: 187525 MB
node 4 free: 193338 MB
node 5 cpus: 39 40 43 44 47 48 49 52 53 111 112 115 116 119 120 121 124 125
node 5 size: 187107 MB
node 5 free: 193250 MB
node 6 cpus: 54 55 56 59 60 63 64 68 69 126 127 128 131 132 135 136 140 141
node 6 size: 187475 MB
node 6 free: 193302 MB
node 7 cpus: 57 58 61 62 65 66 67 70 71 129 130 133 134 137 138 139 142 143
node 7 size: 186893 MB
node 7 free: 193343 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 11 20 20 20 20 20 20
  1: 11 10 20 20 20 20 20 20
  2: 20 20 10 11 20 20 20 20
  3: 20 20 11 10 20 20 20 20
  4: 20 20 20 20 10 11 20 20
  5: 20 20 20 20 11 10 20 20
  6: 20 20 20 20 20 20 10 11
  7: 20 20 20 20 20 20 11 10

```

```

From /proc/meminfo
MemTotal:      1583423332 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

/sbin/tuned-adm active
Current active profile: throughput-performance

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.3 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 475

xFusion 2488H V6 (Intel Xeon Gold 5318H)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2022
Hardware Availability: Jun-2020
Software Availability: Dec-2021

Platform Notes (Continued)

```
VERSION_ID="8.3"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga
```

```
uname -a:
Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

```
run-level 3 Apr 13 22:59
```

```
SPEC is set to: /spec2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs   270G  84G  187G  32% /
```

```
From /sys/devices/virtual/dmi/id
Vendor:          XFUSION
Product:         2488H V6
Product Family: Cedar Island
Serial:         123456
```

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
48x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200, configured at 2666

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 475

xFusion 2488H V6 (Intel Xeon Gold 5318H)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2022
Hardware Availability: Jun-2020
Software Availability: Dec-2021

Platform Notes (Continued)

BIOS:

BIOS Vendor: ByoSoft
BIOS Version: 0.81
BIOS Date: 02/10/2022

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.0.0 Build 20211123
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base) 510.parest_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.0.0 Build 20211123
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.0.0 Build 20211123
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.0.0 Build 20211123
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.0.0 Build 20211123
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.0.0 Build 20211123
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 475

xFusion 2488H V6 (Intel Xeon Gold 5318H)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2022
Hardware Availability: Jun-2020
Software Availability: Dec-2021

Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.5.0 Build 20211109_000000
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.5.0 Build 20211109_000000
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.5.0 Build 20211109_000000
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.0.0 Build 20211123
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifort



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 475

xFusion 2488H V6 (Intel Xeon Gold 5318H)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2022
Hardware Availability: Jun-2020
Software Availability: Dec-2021

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc -L/spec2017/je5.0.1-64
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc -L/spec2017/je5.0.1-64
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -ljemalloc -L/spec2017/je5.0.1-64
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/spec2017/je5.0.1-64
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 475

xFusion 2488H V6 (Intel Xeon Gold 5318H)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2022
Hardware Availability: Jun-2020
Software Availability: Dec-2021

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-mbranches-within-32B-boundaries -ljemalloc -L/spec2017/je5.0.1-64
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/spec2017/je5.0.1-64
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revC.2022-04-29.html
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-CPX-V1.1.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revC.2022-04-29.xml
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-CPX-V1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-04-13 11:07:07-0400.
Report generated on 2022-05-10 19:12:02 by CPU2017 PDF formatter v6442.
Originally published on 2022-05-10.