SPEC CFP95 Results

©Copyright 1995, Standard Performance Evaluation Corporation

Intel Corporation
Intel SE440BX2 Motherboard(300MHz, Pentium II processor)

SPECfp95 = 9.20

SPECfp_base95 = 8.32

SPEC license # 14	Tested By: Intel Corp.	Test Date: Feb-99	Hardware Avail: Mar-99	Software Avail: Mar-99

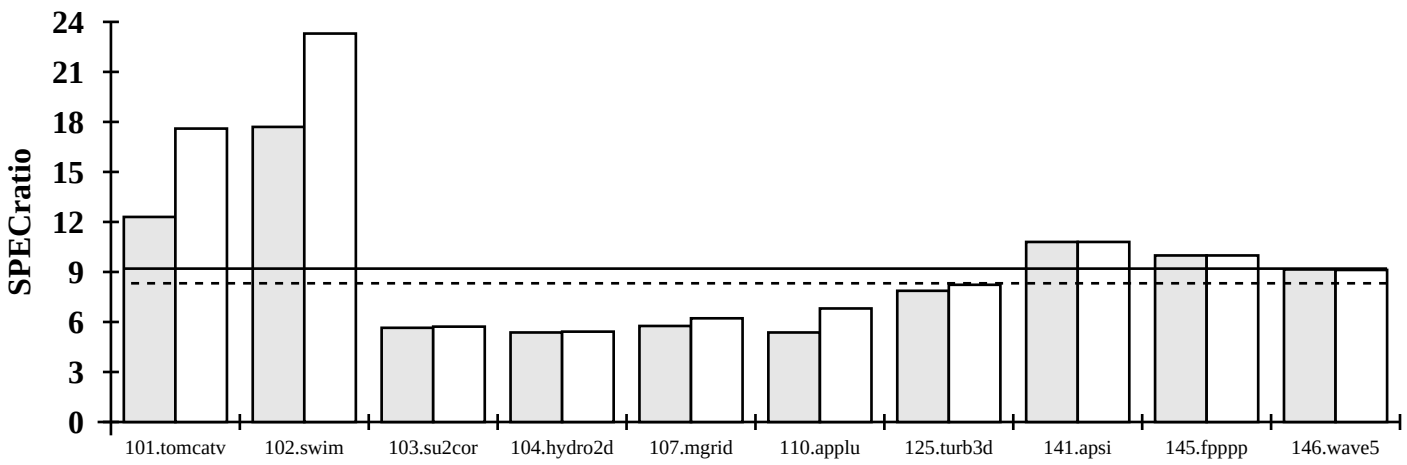

Hardware/Software Configuration for:
Intel SE440BX2 Motherboard(300MHz, Pentium II processor)

A line in your configuration is too long
or you have too many lines.
Please fix the problem and try again

Benchmark # and Name	Reference Time	Base Run Time	Base SPEC Ratio	Run Time	SPEC Ratio
101.tomcatv	3700	300	12.3	210	17.6
102.swim	8600	485	17.7	369	23.3
103.su2cor	1400	248	5.65	245	5.72
104.hydro2d	2400	447	5.37	443	5.42
107.mgrid	2500	434	5.76	402	6.22
110.applu	2200	410	5.37	323	6.81
125.turb3d	4100	521	7.87	498	8.23
141.apsi	2100	195	10.8	195	10.8
145.fpppp	9600	961	9.99	961	9.99
146.wave5	3000	328	9.15	329	9.12
SPECfp_base95 (G. Mean)			8.32		
		SPECfp95 (G. Mean)			9.20

Notes/Tuning Information

```
Flags: Base: -G6 -Qpc 64
Peak:
101: -G6 -Qpc 64 -Qpad -Qrct -Qpad_dim 5
102: -G6  -Qpad -Qpad_dim 2 -Qpc 32
103: -G6  -Qpad -Qrct -Qpc 64
104: -G6  -Qpc 64
107: -Qpad -Qpc 64 -QIfdiv-
110: -G6  -Qip -mP2OPT_opt_bblock_stat_limit=10000 -Qpc 64
125: -G6 -Qpc 64 -Qpad
141: -G6  -Qpc 64
145: -G6 -Qpc 64
146: -G6  -Qpc 64
The Intel Compiler 4.0 is shipped with VTune 4.0 - see http://developer.intel.com/
Tested systems can be used with: Shin-G ATX Computer Case; Sparkle, Inc. ATX Power Supply
Product description located as of 8/98:
http://developer.intel.com/design/motherbd/se/se_ds.htm
Motherboard is available through Intel OEM Distribution Channel. See
```