SPEC CINT95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Compaq Computer Corporation
AlphaServer GS140 Model 6/700

SPECint_rate95 = 1329

SPECint_rate_base95 = 1126

SPEC license # 2	Tested By: Compaq NH	Test Date: Jun-99	Hardware Avail: Oct-99	Software Avail: Jul-99

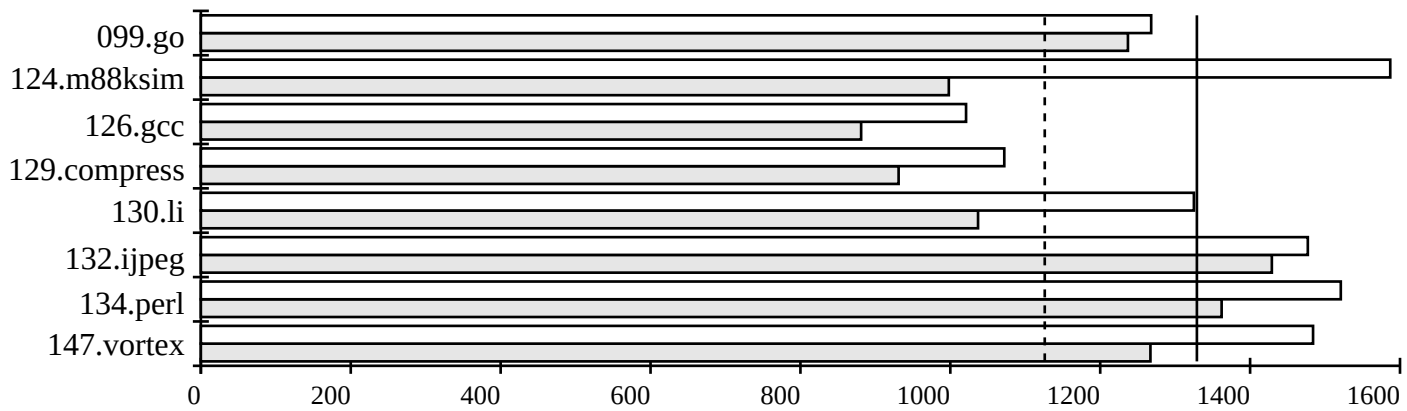

SPECrate

Hardware/Software Configuration for:
AlphaServer GS140 Model 6/700

Hardware

Model Name:	AlphaServer GS140 Model 6/700
CPU:	700 MHz 21264A
FPU:	Integrated
Number of CPU(s):	4
Primary Cache:	64KB(I)+64KB(D) on chip
Secondary Cache:	8MB (I+D) off chip
Other Cache:	none
Memory:	8GB (4x2GB)
Disk Subsystem:	2x 4GB
Other Hardware:	Ethernet

Software

Operating System:	Tru64 UNIX V4.0F
Compiler:	DEC C V6.0-007-4088L
	protect_headers_setup.sh
File System:	ufs
System State:	Multi-User

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
099.go	4	134	1237	4	131	1268
124.m88ksim	4	68.5	998	4	43	1587
126.gcc	4	69.4	881	4	60	1021
129.compress	4	69.6	931	4	60	1072
130.li	4	66.0	1037	4	52	1325
132.ijpeg	4	60.5	1429	4	58	1477
134.perl	4	50.2	1362	4	45	1521
147.vortex	4	76.7	1267	4	66	1484
SPECint_rate_base95 (G. Mean)			1126			
			SPECint_rate95 (G. Mean)			1329

Notes/Tuning Information

```
Compiler: cc.alt -std1      baseline: -O4 -arch ev6 -non_shared +OmFb
go:       -ifo -arch ev6 -g3 -O3 -inline speed -non_shared +OmFb
m88ksim:  -ifo -arch ev6 -g3 -O4 -inline speed -unroll 16 -non_shared +GemFb
gcc:      -ifo -arch ev6 -g1 -O4 -inline speed -xtaso_short -noansi_alias -non_shared  +BothFb
compress: -ifo -arch ev6 -g3 -O4 -fast -assume whole_program -non_shared -lsys5 +GemFb
li:       -ifo -arch ev6 -g1 -O4 -inline speed -xtaso_short -speculate all -non_shared -lsys5 +GemFb
ijpeg:    -ifo -arch ev6 -g3 -O4 -fast -speculate all -non_shared +GemFb
perl:     -ifo -arch ev6 -g3 -O3 -inline speed -non_shared -lsys5 +GemFb
vortex:   -ifo -arch ev6 -g3 -O4 -fast -inline speed -speculate all -non_shared +BothFb
Portability: m88ksim: -DLEHOST   perl: -DI_TIME    vortex: -D__RISC_64__

OmFb:  PASS1 = -prof_gen -prof_dir /tmp/prof    PASS2 = -prof_use_om_feedback -prof_dir /tmp/prof
GemFb: PASS1 = As in OmFb, plus -gen_feedback   PASS2 = -prof_use_feedback    -prof_dir /tmp/prof

BothFb: PASS1 = As in GemFb                     PASS2 = -prof_use_feedback    -prof_dir /tmp/prof -r
.   fdo_pre2  = mv %exename% rr; ld [-taso] -o fb rr -lexc; pixie -pids fb -o %exename%
.   fdo_run2  = %command%
.   fdo_post2 = ld [-taso] -om rr -o rrom -lexc; prof -pixie -merge fb.Counts fb fb.Addrs fb.Counts.*;
.   /usr/lib/cmplrs/cc.alt/om [-taso] -om_split_procedures -om_ireorg_feedback fb -o %binary% rrom
.   (only gcc uses taso)
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 20109
(703) 331-0180
info@spec.org
http://www.spec.org/

-- Prepared By: --