SPEC CINT95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Compaq Computer Corporation
AlphaServer GS60E Model 6/700

SPECint_rate95 = 2532

SPECint_rate_base95 = 2155

SPEC license # 2	Tested By: Compaq NH	Test Date: Sep-99	Hardware Avail: Oct-99	Software Avail: Jul-99

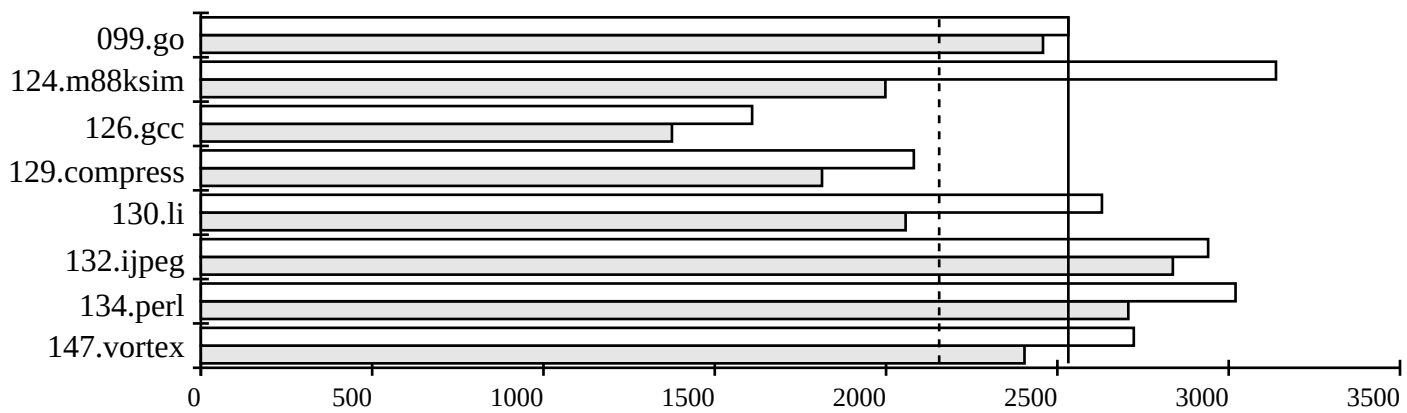

Hardware/Software Configuration for:
AlphaServer GS60E Model 6/700

Hardware

Model Name:	AlphaServer GS60E Model 6/700
CPU:	700 MHz 21264A
FPU:	Integrated
Number of CPU(s):	8
Primary Cache:	64KB(I)+64KB(D) on chip
Secondary Cache:	8MB (I+D) off chip
Other Cache:	none
Memory:	8GB (2x4GB)
Disk Subsystem:	2x 4GB
Other Hardware:	Ethernet

Software

Operating System:	Tru64 UNIX V4.0F
Compiler:	DEC C V6.0-007-4088L
	protect_headers_setup.sh
File System:	ufs
System State:	Multi-User

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
099.go	8	135	2458	8	131	2532
124.m88ksim	8	68.5	1998	8	44	3138
126.gcc	8	89.0	1375	8	76	1609
129.compress	8	71.5	1813	8	62	2081
130.li	8	66.5	2057	8	52	2630
132.ijpeg	8	60.9	2837	8	59	2940
134.perl	8	50.5	2707	8	45	3020
147.vortex	8	80.9	2404	8	71	2723
SPECint_rate_base95 (G. Mean)			2155			
			SPECint_rate95 (G. Mean)			2532

Notes/Tuning Information

```
Compiler: cc.alt -std1      baseline: -O4 -arch ev6 -non_shared +OmFb
go:       -ifo -arch ev6 -g3 -O3 -inline speed -non_shared +OmFb
m88ksim:  -ifo -arch ev6 -g3 -O4 -inline speed -unroll 16 -non_shared +GemFb
gcc:      -ifo -arch ev6 -g1 -O4 -inline speed -xtaso_short -noansi_alias -non_shared  +BothFb
compress: -ifo -arch ev6 -g3 -O4 -fast -assume whole_program -non_shared -lsys5 +GemFb
li:       -ifo -arch ev6 -g1 -O4 -inline speed -xtaso_short -speculate all -non_shared -lsys5 +GemFb
ijpeg:    -ifo -arch ev6 -g3 -O4 -fast -speculate all -non_shared +GemFb
perl:     -ifo -arch ev6 -g3 -O3 -inline speed -non_shared -lsys5 +GemFb
vortex:   -ifo -arch ev6 -g3 -O4 -fast -inline speed -speculate all -non_shared +BothFb
Portability: m88ksim: -DLEHOST   perl: -DI_TIME    vortex: -D__RISC_64__

OmFb:  PASS1 = -prof_gen -prof_dir /tmp/prof    PASS2 = -prof_use_om_feedback -prof_dir /tmp/prof
GemFb: PASS1 = As in OmFb, plus -gen_feedback   PASS2 = -prof_use_feedback    -prof_dir /tmp/prof

BothFb: PASS1 = As in GemFb                     PASS2 = -prof_use_feedback    -prof_dir /tmp/prof -r
.   fdo_pre2  = mv %exename% rr; ld [-taso] -o fb rr -lexc; pixie -pids fb -o %exename%
.   fdo_run2  = %command%
.   fdo_post2 = ld [-taso] -om rr -o rrom -lexc; prof -pixie -merge fb.Counts fb fb.Addrs fb.Counts.*;
.   /usr/lib/cmplrs/cc.alt/om [-taso] -om_split_procedures -om_ireorg_feedback fb -o %binary% rrom
.   (only gcc uses taso)
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 20109
(703) 331-0180
info@spec.org
http://www.spec.org/

-- Prepared By: --