



SPEChpc™ 2021 Tiny Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPEChpc 2021_tny_base = 17.7

SPEChpc 2021_tny_peak = 17.9

ThinkSystem SR655 V3 (AMD EPYC 9654P, Nvidia H100-PCIE-80G)

hpc2021 License: 28


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Feb-2023

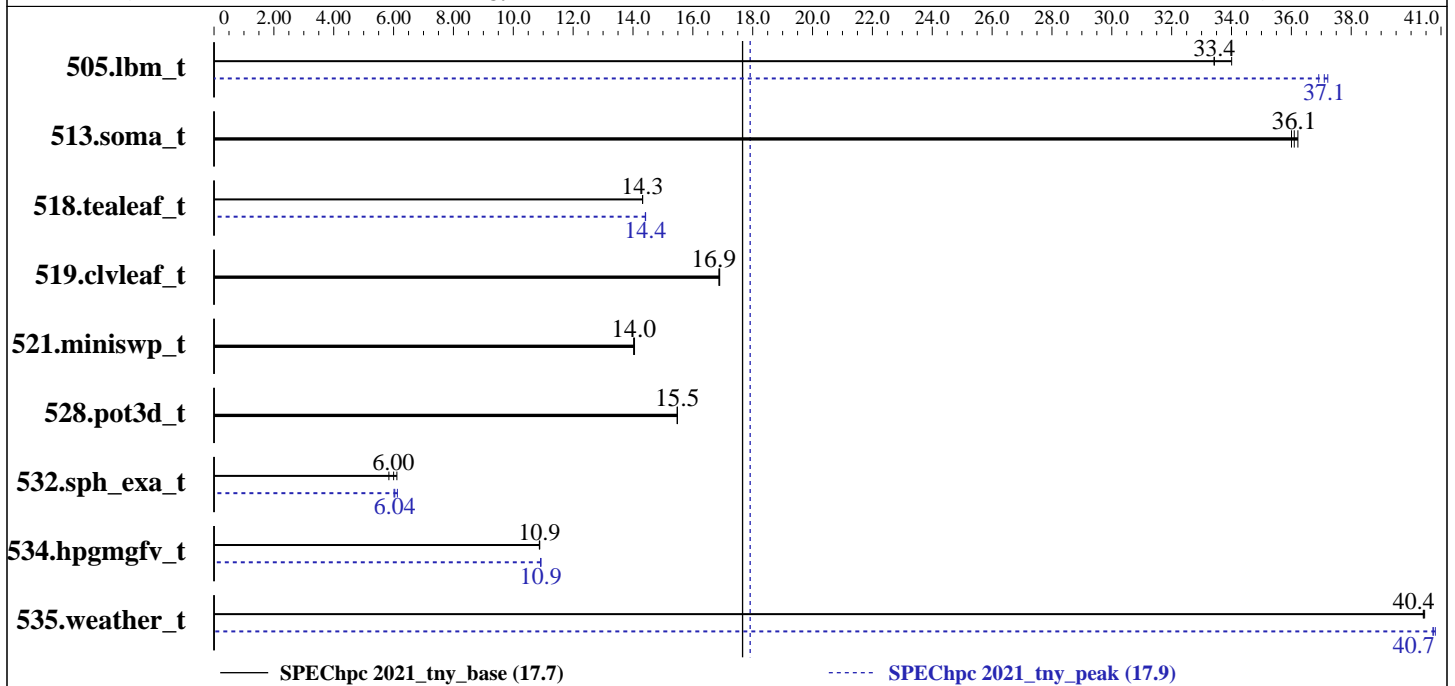

Results Table

Benchmark	Base								Peak									
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
505.lbm_t	ACC	1	1	66.2	34.0	67.3	33.4	67.3	33.4	ACC	1	1	60.6	37.1	61.0	36.9	60.5	37.2
513.soma_t	ACC	1	1	102	36.2	103	36.0	103	36.1	ACC	1	1	102	36.2	103	36.0	103	36.1
518.tealeaf_t	ACC	1	1	115	14.3	115	14.3	115	14.3	ACC	1	1	114	14.4	114	14.4	114	14.4
519.civleaf_t	ACC	1	1	97.8	16.9	97.6	16.9	97.7	16.9	ACC	1	1	97.8	16.9	97.6	16.9	97.7	16.9
521.miniswp_t	ACC	1	1	114	14.1	114	14.0	114	14.0	ACC	1	1	114	14.1	114	14.0	114	14.0
528.pot3d_t	ACC	1	1	137	15.5	137	15.5	137	15.5	ACC	1	1	137	15.5	137	15.5	137	15.5
532.sph_exa_t	ACC	1	1	334	5.84	319	6.11	325	6.00	ACC	1	1	323	6.04	318	6.13	324	6.01
534.hpgmgfv_t	ACC	1	1	108	10.9	108	10.9	108	10.9	ACC	1	1	108	10.9	108	10.9	108	10.9
535.weather_t	ACC	1	1	79.8	40.4	79.8	40.4	79.7	40.5	ACC	1	1	79.2	40.7	79.0	40.8	79.2	40.7

SPEChpc 2021_tny_base = 17.7

SPEChpc 2021_tny_peak = 17.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEChpc™ 2021 Tiny Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPEChpc 2021_tny_base = 17.7

SPEChpc 2021_tny_peak = 17.9

ThinkSystem SR655 V3 (AMD EPYC 9654P, Nvidia H100-PCIE-80G)

hpc2021 License: 28
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: Feb-2023

Hardware Summary

Type of System: Homogeneous Cluster
Compute Node: ThinkSystem SR655 V3
Compute Nodes Used: 1
Total Chips: 1
Total Cores: 96
Total Threads: 96
Total Memory: 384 GB
Max. Peak Threads: 1

Software Summary

Compiler: Nvidia HPC SDK 22.11
MPI Library: Open MPI 4.0.5
Other MPI Info: None
Other Software: --
Base Parallel Model: ACC
Base Ranks Run: 1
Base Threads Run: 1
Peak Parallel Models: ACC
Minimum Peak Ranks: 1
Maximum Peak Ranks: 1
Max. Peak Threads: 1
Min. Peak Threads: 1

Node Description: ThinkSystem SR655 V3

Hardware

Number of nodes: 1
Uses of the node: compute
Vendor: Lenovo Global Technology
Model: ThinkSystem SR655 V3
CPU Name: AMD EPYC 9654P
CPU(s) orderable: 1 chips
Chips enabled: 1
Cores enabled: 96
Cores per chip: 96
Threads per core: 1
CPU Characteristics: Intel Turbo Boost Technology up to 3.7 GHz
CPU MHz: 2400
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per core
L3 Cache: 384 MB I+D on chip per chip
Other Cache: None
Memory: 384 GB (24 x 16 GB 2Rx4 PC5-4800B-R)
Disk Subsystem: 1x ThinkSystem 2.5" 5300 480GB SSD
Other Hardware: None
Accel Count: 8
Accel Model: Tesla H100 PCIe 80GB
Accel Vendor: Nvidia Corporation
Accel Type: GPU
Accel Connection: PCIe Gen5 x16
Accel ECC enabled: Yes
Accel Description: Nvidia Tesla H100 PCIe 80GB
Adapter: Mellanox ConnectX-6 HDR
Number of Adapters: 1
Slot Type: PCI-Express 5.0 x16
Data Rate: 200 Gb/s
Ports Used: 1
Interconnect Type: Nvidia Mellanox ConnectX-6 HDR

Software

Accelerator Driver: 525.60.13
Adapter: Mellanox ConnectX-6 HDR
Adapter Driver: 5.2-1.0.4
Adapter Firmware: 20.28.1002
Operating System: Red Hat Enterprise Linux Server release 9, Kernel 5.14.0-70.22.1.el9_0.x86_64
Local File System: xfs
Shared File System: XFS
System State: Multi-user, run level 3
Other Software: None



SPEChpc™ 2021 Tiny Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPEChpc 2021_tny_base = 17.7

SPEChpc 2021_tny_peak = 17.9

ThinkSystem SR655 V3 (AMD EPYC 9654P, Nvidia H100-PCIE-80G)

hpc2021 License: 28
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: Feb-2023

Submit Notes

Individual Ranks were bound to the CPU cores on the same NUMA node as the GPU using 'numactl' within the following "bind2.pl" perl script:

```
---- Start bind2.pl -----
my %bind;
$bind{0} = "1-3";
$bind{1} = "144-146";
$bind{2} = "8-10";
$bind{3} = "11-14";
$bind{4} = "41-43";
$bind{5} = "44-47";
$bind{6} = "61-63";
$bind{7} = "64-67";
my $rank = $ENV{OMPI_COMM_WORLD_LOCAL_RANK};
my $cmd = "taskset -c $bind{$rank} ";
while (my $arg = shift) {
  $cmd .= "$arg ";
}
my $rc = system($cmd);
exit($rc);
---- End bind2.pl -----
The config file option 'submit' was used.
submit = mpirun --allow-run-as-root -x UCX_MEMTYPE_CACHE=n
-host localhost:2 -np $ranks perl $[top]/bind2.pl $command
```

General Notes

Environment variables set by runhpc before the start of the run:
UCX_MEMTYPE_CACHE = "n"
UCX_TLS = "self,shm,cuda_copy"

Compiler Version Notes

```
=====
CC 505.lbm_t(base, peak) 513.soma_t(base, peak) 518.tealeaf_t(base, peak)
   521.miniswp_t(base, peak) 534.hpgmgfv_t(base, peak)
-----

nvc 22.11-0 64-bit target on x86-64 Linux -tp zen3
NVIDIA Compilers and Tools
Copyright (c) 2022, NVIDIA CORPORATION & AFFILIATES. All rights reserved.
-----

=====
CXXC 532.sph_exa_t(base, peak)
-----

nvc++ 22.11-0 64-bit target on x86-64 Linux -tp zen3
NVIDIA Compilers and Tools
```

(Continued on next page)



SPEChpc™ 2021 Tiny Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPEChpc 2021_tny_base = 17.7

SPEChpc 2021_tny_peak = 17.9

ThinkSystem SR655 V3 (AMD EPYC 9654P, Nvidia H100-PCIE-80G)

hpc2021 License: 28
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: Feb-2023

Compiler Version Notes (Continued)

Copyright (c) 2022, NVIDIA CORPORATION & AFFILIATES. All rights reserved.

=====
FC 519.clvleaf_t(base, peak) 528.pot3d_t(base, peak) 535.weather_t(base, peak)
=====

nvfortran 22.11-0 64-bit target on x86-64 Linux -tp zen3

NVIDIA Compilers and Tools

Copyright (c) 2022, NVIDIA CORPORATION & AFFILIATES. All rights reserved.

Base Compiler Invocation

C benchmarks:
mpicc

C++ benchmarks:
mpicxx

Fortran benchmarks:
mpif90

Base Portability Flags

505.lbm_t: -DSPEC_OPENACC_NO_SELF
532.sph_exa_t: --c++17

Base Optimization Flags

C benchmarks:
-fast -acc=gpu -Mfprelaxed -Mnouniform -Mstack_arrays
-DSPEC_ACCEL_AWARE_MPI

C++ benchmarks:
-fast -acc=gpu -Mfprelaxed -Mnouniform -Mstack_arrays
-DSPEC_ACCEL_AWARE_MPI

Fortran benchmarks:
-DSPEC_ACCEL_AWARE_MPI -fast -acc=gpu -Mfprelaxed -Mnouniform
-Mstack_arrays



SPEChpc™ 2021 Tiny Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPEChpc 2021_tny_base = 17.7

SPEChpc 2021_tny_peak = 17.9

ThinkSystem SR655 V3 (AMD EPYC 9654P, Nvidia H100-PCIE-80G)

hpc2021 License: 28
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: Feb-2023

Base Other Flags

C benchmarks (except as noted below):

-Ispecmpitime -w

52l.miniswp_t: -Ispecmpitime/ -w

534.hpgmgfv_t: -Ispecmpitime -w

C++ benchmarks:

-Ispecmpitime -w

Fortran benchmarks (except as noted below):

-w

519.clvleaf_t: -Ispecmpitime -w

Peak Compiler Invocation

C benchmarks:

mpicc

C++ benchmarks:

mpicxx

Fortran benchmarks:

mpif90

Peak Portability Flags

505.lbm_t: -DSPEC_OPENACC_NO_SELF

Peak Optimization Flags

C benchmarks:

505.lbm_t: -fast -acc=gpu -O3 -Mfprelaxed -Mnouniform
-DSPEC_ACCEL_AWARE_MPI

513.soma_t: basepeak = yes

(Continued on next page)



SPEChpc™ 2021 Tiny Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPEChpc 2021_tny_base = 17.7

SPEChpc 2021_tny_peak = 17.9

ThinkSystem SR655 V3 (AMD EPYC 9654P, Nvidia H100-PCIE-80G)

hpc2021 License: 28

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Feb-2023

Peak Optimization Flags (Continued)

518.tealeaf_t: -fast -acc=gpu -Msafepttr -DSPEC_ACCEL_AWARE_MPI

521.miniswp_t: basepeak = yes

534.hpgmgfv_t: -fast -acc=gpu -static-nvidia -DSPEC_ACCEL_AWARE_MPI

C++ benchmarks:

-fast -acc=gpu -O3 -Mfprelaxed -Mnouniform -Mstack_arrays
-static-nvidia -DSPEC_ACCEL_AWARE_MPI

Fortran benchmarks:

519.clvleaf_t: basepeak = yes

528.pot3d_t: basepeak = yes

535.weather_t: -DSPEC_ACCEL_AWARE_MPI -fast -acc=gpu -O3 -Mfprelaxed
-Mnouniform -Mstack_arrays -static-nvidia

Peak Other Flags

C benchmarks (except as noted below):

-Ispecmpitime -w

521.miniswp_t: -Ispecmpitime/ -w

534.hpgmgfv_t: -Ispecmpitime -w

C++ benchmarks:

-Ispecmpitime -w

Fortran benchmarks (except as noted below):

-w

519.clvleaf_t: -Ispecmpitime -w

The flags file that was used to format this result can be browsed at

http://www.spec.org/hpc2021/flags/nv2021_flags_v1.0.3.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/hpc2021/flags/nv2021_flags_v1.0.3.xml



SPEChpc™ 2021 Tiny Result

Copyright 2021-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPEChpc 2021_tny_base = 17.7

SPEChpc 2021_tny_peak = 17.9

ThinkSystem SR655 V3 (AMD EPYC 9654P, Nvidia H100-PCIE-80G)

hpc2021 License: 28
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: Feb-2023

SPEChpc is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEChpc2021 v1.1.7 on 2022-12-26 03:03:25-0500.
Report generated on 2023-02-22 12:25:56 by hpc2021 PDF formatter v1.0.3.
Originally published on 2023-02-22.