



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 106

Huawei CH225 V5 (Intel Xeon Platinum 8158)

SPECspeed2017_fp_peak = 107

CPU2017 License: 3175


Test Date: Oct-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Mar-2018

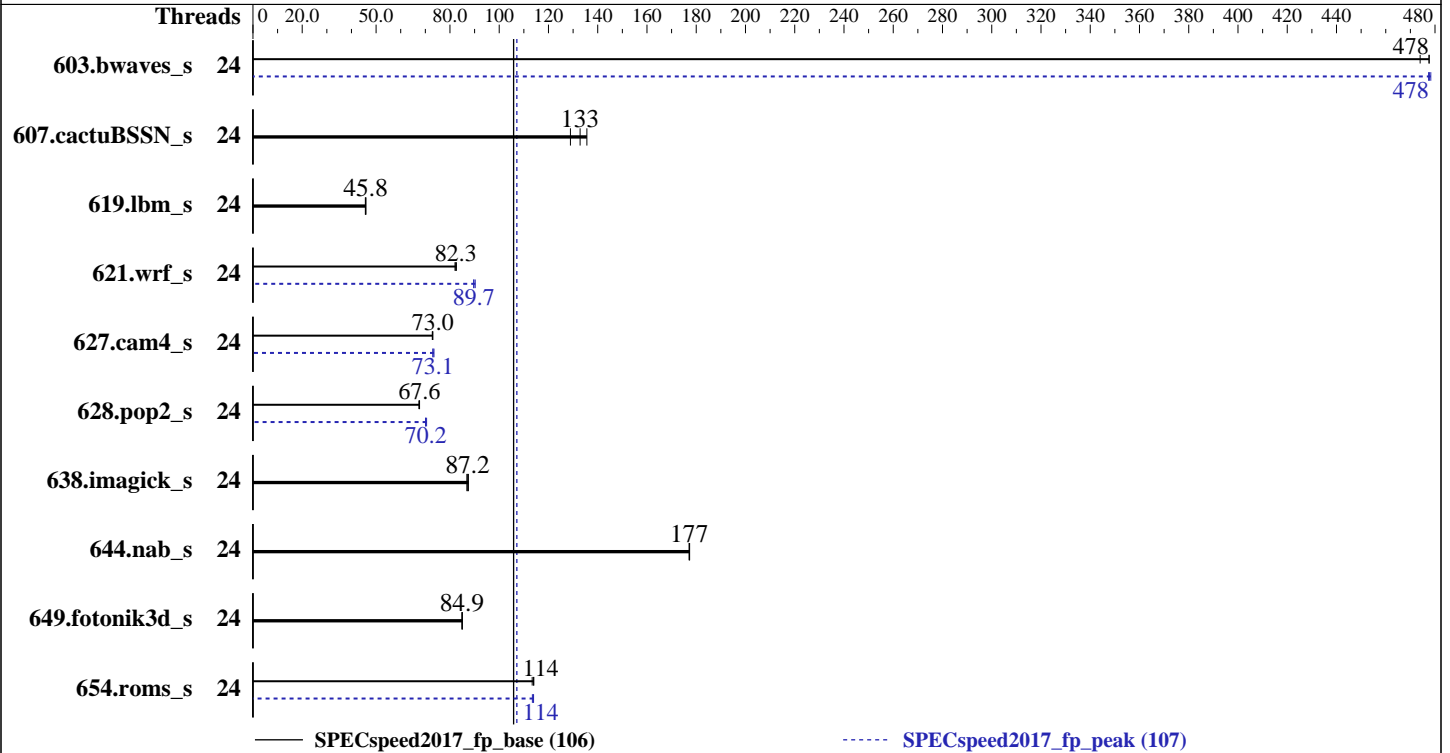

Hardware

CPU Name: Intel Xeon Platinum 8158
 Max MHz.: 3700
 Nominal: 3000
 Enabled: 24 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
 Storage: 1 x 1200 GB SAS, 10000 RPM
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.3 (Maipo)
 Compiler: C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux
 Parallel: Yes
 Firmware: Version 0.80 Released Jun-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 106

Huawei CH225 V5 (Intel Xeon Platinum 8158)

SPECspeed2017_fp_peak = 107

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Oct-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	24	124	474	124	478	<u>124</u>	<u>478</u>	24	124	477	123	478	<u>123</u>	<u>478</u>
607.cactuBSSN_s	24	<u>125</u>	<u>133</u>	123	136	129	129	24	<u>125</u>	<u>133</u>	123	136	129	129
619.lbm_s	24	<u>114</u>	<u>45.8</u>	115	45.6	114	45.9	24	<u>114</u>	<u>45.8</u>	115	45.6	114	45.9
621.wrf_s	24	161	82.0	<u>161</u>	<u>82.3</u>	160	82.6	24	<u>147</u>	<u>89.7</u>	148	89.6	147	90.3
627.cam4_s	24	121	73.0	122	72.8	<u>121</u>	<u>73.0</u>	24	<u>121</u>	<u>73.1</u>	121	73.5	121	73.1
628.pop2_s	24	176	67.4	176	67.7	<u>176</u>	<u>67.6</u>	24	169	70.1	168	70.5	<u>169</u>	<u>70.2</u>
638.imagick_s	24	165	87.5	166	86.9	<u>165</u>	<u>87.2</u>	24	165	87.5	166	86.9	<u>165</u>	<u>87.2</u>
644.nab_s	24	98.5	177	<u>98.6</u>	<u>177</u>	98.6	177	24	98.5	177	<u>98.6</u>	<u>177</u>	98.6	177
649.fotonik3d_s	24	107	85.0	107	84.9	<u>107</u>	<u>84.9</u>	24	107	85.0	107	84.9	<u>107</u>	<u>84.9</u>
654.roms_s	24	139	113	138	114	<u>138</u>	<u>114</u>	24	138	114	<u>138</u>	<u>114</u>	139	113

SPECspeed2017_fp_base = **106**

SPECspeed2017_fp_peak = **107**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"

OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 106

Huawei CH225 V5 (Intel Xeon Platinum 8158)

SPECspeed2017_fp_peak = 107

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Oct-2018

Hardware Availability: Jul-2017

Software Availability: Mar-2018

Platform Notes

BIOS configuration:

Power Policy Set to Load Balance

Hyper-Threading Set to Disable

XPT Prefetch Set to Enabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on localhost.localdomain Thu Oct 11 10:20:06 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8158 CPU @ 3.00GHz

2 "physical id"s (chips)

24 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 12

physical 0: cores 0 1 2 3 4 9 10 16 18 19 25 26

physical 1: cores 0 3 4 5 6 7 16 18 19 20 21 22

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 24

On-line CPU(s) list: 0-23

Thread(s) per core: 1

Core(s) per socket: 12

Socket(s): 2

NUMA node(s): 2

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Platinum 8158 CPU @ 3.00GHz

Stepping: 4

CPU MHz: 3001.000

BogoMIPS: 6006.14

Virtualization: VT-x

L1d cache: 32K

L1i cache: 32K

L2 cache: 1024K

L3 cache: 25344K

NUMA node0 CPU(s): 0-11

NUMA node1 CPU(s): 12-23

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 106

Huawei CH225 V5 (Intel Xeon Platinum 8158)

SPECspeed2017_fp_peak = 107

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Oct-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11
node 0 size: 194737 MB
node 0 free: 189362 MB
node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23
node 1 size: 196608 MB
node 1 free: 191588 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10
```

```
From /proc/meminfo
MemTotal:      394169160 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-693.11.6.el7.x86_64 #1 SMP Thu Dec 28 14:23:39 EST
2017 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 11 05:14
```

```
SPEC is set to: /spec2017
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda4        xfs       400G     9.6G  391G   3% /
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 106

Huawei CH225 V5 (Intel Xeon Platinum 8158)

SPECspeed2017_fp_peak = 107

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Oct-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Platform Notes (Continued)

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 0.80 06/27/2018

Memory:

24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 619.lbm_s(base) 638.imagick_s(base, peak) 644.nab_s(base, peak)

icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 619.lbm_s(peak)

icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 607.cactuBSSN_s(base, peak)

icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base, peak)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(peak) 649.fotonik3d_s(peak)

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 106

Huawei CH225 V5 (Intel Xeon Platinum 8158)

SPECspeed2017_fp_peak = 107

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Oct-2018
Hardware Availability: Jul-2017
Software Availability: Mar-2018

Compiler Version Notes (Continued)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 621.wrf_s(peak) 628.pop2_s(peak)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 106

Huawei CH225 V5 (Intel Xeon Platinum 8158)

SPECspeed2017_fp_peak = 107

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Oct-2018

Hardware Availability: Jul-2017

Software Availability: Mar-2018

Base Portability Flags (Continued)

```
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 106

Huawei CH225 V5 (Intel Xeon Platinum 8158)

SPECspeed2017_fp_peak = 107

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Oct-2018

Hardware Availability: Jul-2017

Software Availability: Mar-2018

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: basepeak = yes
```

```
638.imagick_s: basepeak = yes
```

```
644.nab_s: basepeak = yes
```

Fortran benchmarks:

```
603.bwaves_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP  
-DSPEC_OPENMP -O2 -xCORE-AVX2 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3  
-qopenmp -nostandard-realloc-lhs
```

```
649.fotonik3d_s: basepeak = yes
```

```
654.roms_s: -DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3  
-qopenmp -nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs
```

```
627.cam4_s: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 106

Huawei CH225 V5 (Intel Xeon Platinum 8158)

SPECspeed2017_fp_peak = 107

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Oct-2018

Hardware Availability: Jul-2017

Software Availability: Mar-2018

Peak Optimization Flags (Continued)

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-10-11 10:20:05-0400.

Report generated on 2018-10-31 19:09:40 by CPU2017 PDF formatter v6067.

Originally published on 2018-10-30.