



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

SPECspeed®2017_fp_base = 347

D54Q-2U (Intel Xeon Platinum 8480+, 2.0GHz)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9050


Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Jan-2023

Hardware Availability: Nov-2022

Software Availability: Aug-2022

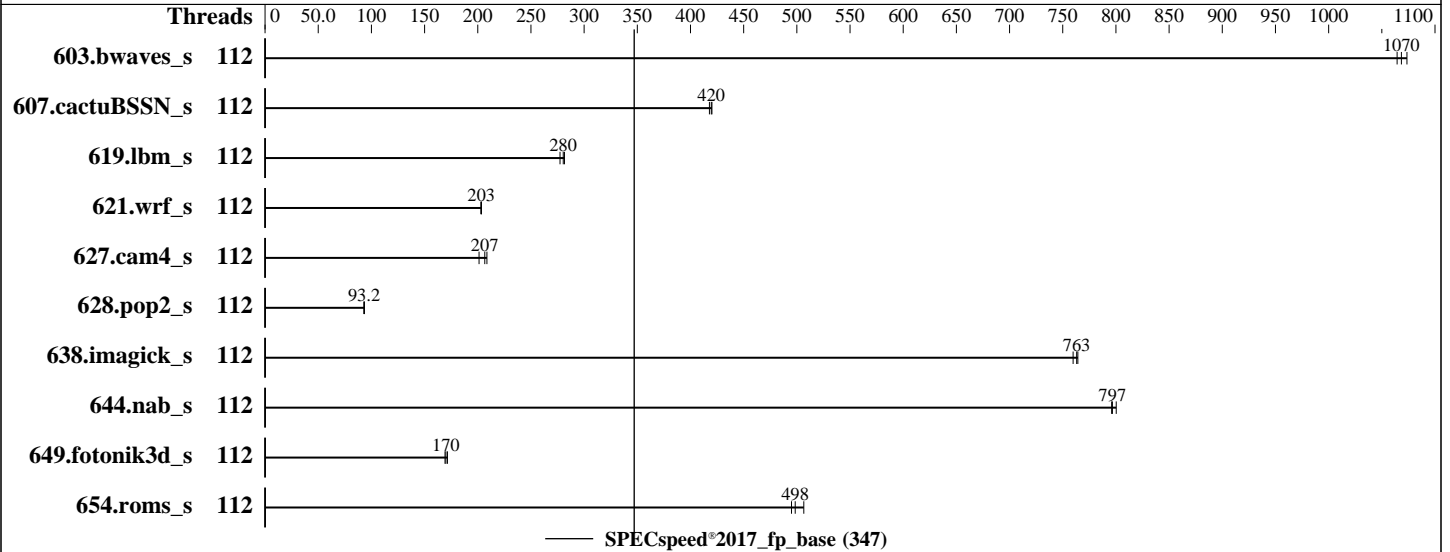

Hardware

CPU Name: Intel Xeon Platinum 8480+
 Max MHz: 3800
 Nominal: 2000
 Enabled: 112 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 105 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 7.68 TB PCIe 4.0x4 NVMe SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)
 Kernel 5.14.0-70.22.1.el9_0.x86_64
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Version 3A11 released Dec-2022
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

SPECspeed®2017_fp_base = 347

D54Q-2U (Intel Xeon Platinum 8480+, 2.0GHz)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Jan-2023

Hardware Availability: Nov-2022

Software Availability: Aug-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	112	55.4	1060	<u>55.2</u>	<u>1070</u>	55.0	1070							
607.cactuBSSN_s	112	<u>39.7</u>	<u>420</u>	39.9	418	39.7	420							
619.lbm_s	112	18.9	277	<u>18.7</u>	<u>280</u>	18.6	282							
621.wrf_s	112	<u>65.1</u>	<u>203</u>	65.2	203	65.0	204							
627.cam4_s	112	<u>42.9</u>	<u>207</u>	44.0	201	42.5	209							
628.pop2_s	112	127	93.4	128	93.0	<u>127</u>	<u>93.2</u>							
638.imagick_s	112	19.0	760	<u>18.9</u>	<u>763</u>	18.9	764							
644.nab_s	112	<u>21.9</u>	<u>797</u>	22.0	796	21.8	800							
649.fotonik3d_s	112	<u>53.6</u>	<u>170</u>	53.2	172	53.9	169							
654.roms_s	112	31.1	507	31.8	495	<u>31.6</u>	<u>498</u>							

SPECspeed®2017_fp_base = 347

SPECspeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/root/cpu2017/lib/intel64:/root/cpu2017/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

SPECspeed®2017_fp_base = 347

D54Q-2U (Intel Xeon Platinum 8480+, 2.0GHz)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Jan-2023

Hardware Availability: Nov-2022

Software Availability: Aug-2022

General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration

Enable LP [Global] set to Single LP

Patrol Scrub set to Disabled

SNC set to Disabled

LLC dead line alloc set to Disabled

Hardware P-States set to Disable

Sysinfo program /root/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Fri Feb 10 20:52:20 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

SPECspeed®2017_fp_base = 347

D54Q-2U (Intel Xeon Platinum 8480+, 2.0GHz)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Jan-2023

Hardware Availability: Nov-2022

Software Availability: Aug-2022

Platform Notes (Continued)

```
Linux localhost.localdomain 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
```

2. w

```
20:52:20 up 26 min, 1 user, load average: 86.24, 97.23, 80.32
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root      tty1    20:26   26:13  0.89s  0.02s /bin/bash ./S6Qtest.sh
```

3. Username

```
From environment variable $USER: root
```

4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority          (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 4124314
max locked memory            (kbytes, -l) unlimited
max memory size              (kbytes, -m) unlimited
open files                   (-n) 1024
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority           (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
max user processes           (-u) 4124314
virtual memory                (kbytes, -v) unlimited
file locks                   (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
/bin/bash ./S6Qtest.sh
/bin/bash ./S6Qtest.sh
runcpu --nobuild --action validate --define default-platform-flags -c
ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=112 --tune base -o all --define drop_caches
fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=112 --tune base --output_format all --define
drop_caches --nopower --runmode speed --tune base --size refspeed fpspeed --nopreenv --note-preenv
--logfile $SPEC/tmp/CPU2017.011/templogs/preenv.fpspeed.011.0.log --lognum 011.0 --from_runcpu 2
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

SPECspeed®2017_fp_base = 347

D54Q-2U (Intel Xeon Platinum 8480+, 2.0GHz)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Jan-2023

Hardware Availability: Nov-2022

Software Availability: Aug-2022

Platform Notes (Continued)

```
specperl $SPEC/bin/sysinfo
$SPEC = /root/cpu2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8480+
vendor_id       : GenuineIntel
cpu family      : 6
model           : 143
stepping        : 8
microcode       : 0x2b000111
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 56
siblings        : 56
```

2 physical ids (chips)

112 processors (hardware threads)

physical id 0: core ids 0-55

physical id 1: core ids 0-55

physical id 0: apicids

0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110

physical id 1: apicids

128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236,238

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                112
On-line CPU(s) list:   0-111
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Platinum 8480+
BIOS Model name:      Intel(R) Xeon(R) Platinum 8480+
CPU family:            6
Model:                 143
Thread(s) per core:    1
Core(s) per socket:    56
Socket(s):             2
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

SPECspeed®2017_fp_base = 347

D54Q-2U (Intel Xeon Platinum 8480+, 2.0GHz)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Jan-2023

Hardware Availability: Nov-2022

Software Availability: Aug-2022

Platform Notes (Continued)

```
Stepping: 8
Frequency boost: enabled
CPU max MHz: 2001.0000
CPU min MHz: 800.0000
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

Virtualization: VT-x
L1d cache: 5.3 MiB (112 instances)
L1i cache: 3.5 MiB (112 instances)
L2 cache: 224 MiB (112 instances)
L3 cache: 210 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-55
NUMA node1 CPU(s): 56-111
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.3M	12	Data	1	64	1	64
L1i	32K	3.5M	8	Instruction	1	64	1	64
L2	2M	224M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

SPECspeed®2017_fp_base = 347

D54Q-2U (Intel Xeon Platinum 8480+, 2.0GHz)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Jan-2023

Hardware Availability: Nov-2022

Software Availability: Aug-2022

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-55
node 0 size: 515099 MB
node 0 free: 512161 MB
node 1 cpus: 56-111
node 1 size: 516036 MB
node 1 free: 514867 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10

```

9. /proc/meminfo

MemTotal: 1055883784 kB

10. who -r

run-level 3 Feb 10 20:26

11. Systemd service manager version: systemd 250 (250-6.e19_0)

```

Default Target  Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE          UNIT FILES
enabled        ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker gdm
getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt
low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
nvme-fc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd
rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control
systemd-network-generator udisks2 upower vgauthd vmtoolsd
enabled-runtime rc-local systemd-remount-fs
disabled       arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
dbus-daemon debug-shell dnsmasq firewalld gssproxy iprdump iprinit iprupdate ipsec iscsid
iscsiuio kpatch kvm_stat ledmon man-db-restart-cache-update nfs-blkmap nfs-server nftables
nvme-autoconnect podman podman-auto-update podman-restart psacct ras-mc-ctl rasdaemon
rdisc rhcd rhsm rhsm-facts rpmdm-rebuild serial-getty@ speech-dispatcherd sshd-keygen@
systemd-boot-check-no-failures systemd-pstore systemd-sysextr wpa_supplicant
indirect       spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

SPECspeed®2017_fp_base = 347

D54Q-2U (Intel Xeon Platinum 8480+, 2.0GHz)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Jan-2023

Hardware Availability: Nov-2022

Software Availability: Aug-2022

Platform Notes (Continued)

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd4,gpt2)/vmlinuz-5.14.0-70.22.1.el9_0.x86_64
root=UUID=3224807a-bb12-4011-9c08-e4342403c547
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=UUID=ffab002c-001d-4ca9-b552-95895861c71a
nomodeset
rhgb
quiet
selinux=0
default_hugepagesz=1G
hugepagesz=1G

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 2.00 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

SPECspeed®2017_fp_base = 347

D54Q-2U (Intel Xeon Platinum 8480+, 2.0GHz)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Jan-2023

Hardware Availability: Nov-2022

Software Availability: Aug-2022

Platform Notes (Continued)

```

-----
16. /sys/kernel/mm/transparent_hugepage
   defrag          always defer defer+madvice [madvice] never
   enabled         [always] madvice never
   hpage_pmd_size  2097152
   shmem_enabled   always within_size advise [never] deny force
-----

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs  60000
   defrag                  1
   max_ptes_none          511
   max_ptes_shared        256
   max_ptes_swap          64
   pages_to_scan          4096
   scan_sleep_millisecs   10000
-----

```

```

-----
18. OS release
   From /etc/*-release /etc/*-version
   os-release             Red Hat Enterprise Linux 9.0 (Plow)
   redhat-release         Red Hat Enterprise Linux release 9.0 (Plow)
   system-release         Red Hat Enterprise Linux release 9.0 (Plow)
-----

```

```

-----
19. Disk information
   SPEC is set to: /root/cpu2017
   Filesystem      Type  Size  Used Avail Use% Mounted on
   /dev/nvme0n1p6  xfs   310G  21G  290G   7% /
-----

```

```

-----
20. /sys/devices/virtual/dmi/id
   Vendor:           Quanta Cloud Technology Inc.
   Product:          QuantaGrid D54Q-2U
-----

```

```

-----
21. dmidecode
   Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     16x Micron MTC40F2046S1RC48BA1 64 GB 2 rank 4800
-----

```

22. BIOS

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

SPECspeed®2017_fp_base = 347

D54Q-2U (Intel Xeon Platinum 8480+, 2.0GHz)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Jan-2023

Hardware Availability: Nov-2022

Software Availability: Aug-2022

Platform Notes (Continued)

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 3A11
BIOS Date: 12/02/2022
BIOS Revision: 5.29
Firmware Revision: 3.8

Compiler Version Notes

=====
C | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

SPECspeed®2017_fp_base = 347

D54Q-2U (Intel Xeon Platinum 8480+, 2.0GHz)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Jan-2023

Hardware Availability: Nov-2022

Software Availability: Aug-2022

Compiler Version Notes (Continued)

Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast -ffast-math

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

SPECspeed®2017_fp_base = 347

D54Q-2U (Intel Xeon Platinum 8480+, 2.0GHz)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Jan-2023

Hardware Availability: Nov-2022

Software Availability: Aug-2022

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html

http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-Eagle_Stream-Platform-Settings-V1.0.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml

http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-Eagle_Stream-Platform-Settings-V1.0.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-10 07:52:19-0500.

Report generated on 2023-03-02 11:27:11 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-28.