



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11


(2.60 GHz, Intel Xeon Gold 6442Y)

SPECspeed®2017_fp_base = 295

SPECspeed®2017_fp_peak = 295

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

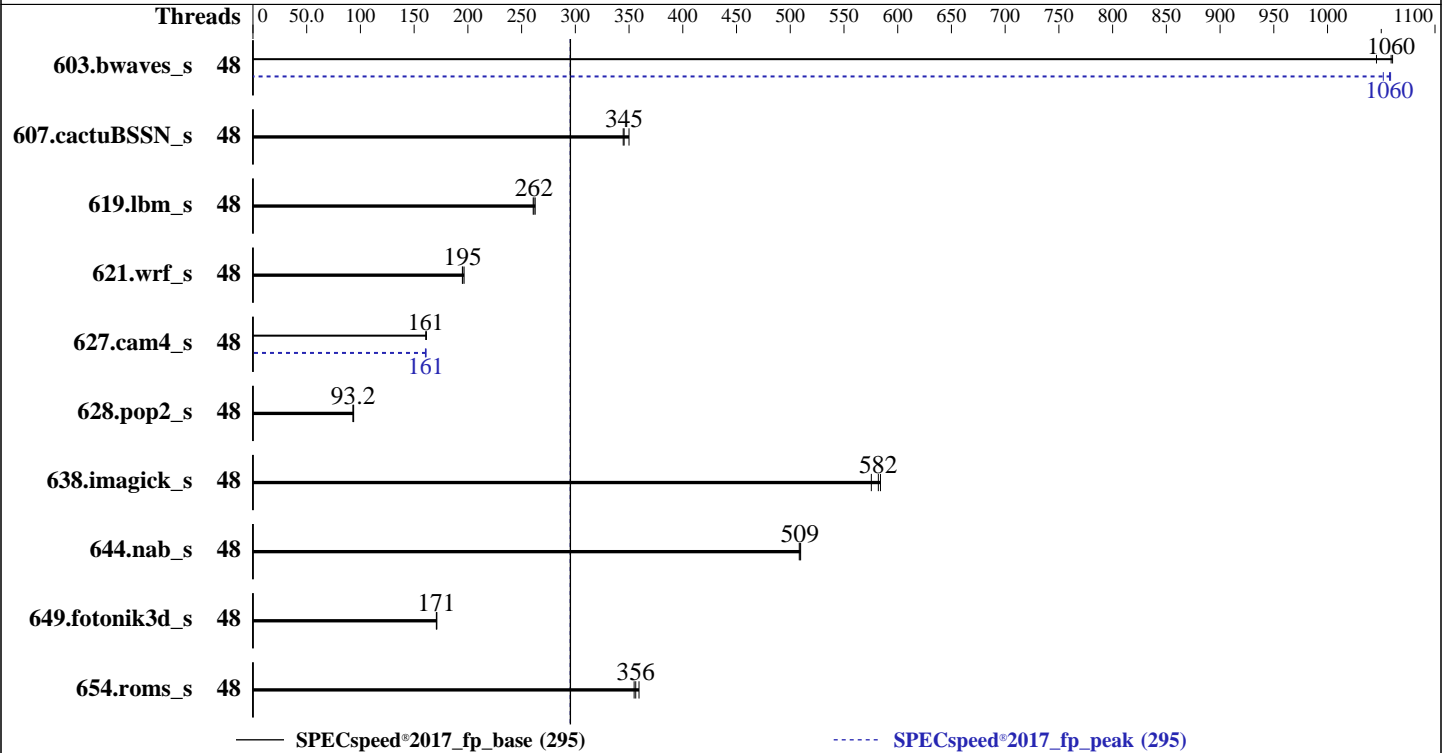

Hardware

CPU Name: Intel Xeon Gold 6442Y
Max MHz: 4000
Nominal: 2600
Enabled: 48 cores, 2 chips
Orderable: 1, 2 chip(s)
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 60 MB I+D on chip per chip
Other: None
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)
Storage: 1 x 1.6 TB NVMe SSD
Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
Kernel 5.14.0-70.13.1.el9_0.x86_64
Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel: Yes
Firmware: HPE BIOS Version v1.40 06/1/2023 released Jun-2023
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.60 GHz, Intel Xeon Gold 6442Y)

SPECspeed®2017_fp_base = 295

SPECspeed®2017_fp_peak = 295

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	48	<u>55.7</u>	<u>1060</u>	56.4	1050	55.6	1060	48	56.1	1050	<u>55.8</u>	<u>1060</u>	55.7	1060
607.cactuBSSN_s	48	48.4	345	<u>48.3</u>	<u>345</u>	47.6	350	48	48.4	345	<u>48.3</u>	<u>345</u>	47.6	350
619.lbm_s	48	20.1	261	<u>20.0</u>	<u>262</u>	19.9	263	48	20.1	261	<u>20.0</u>	<u>262</u>	19.9	263
621.wrf_s	48	<u>67.7</u>	<u>195</u>	67.9	195	67.3	196	48	<u>67.7</u>	<u>195</u>	67.9	195	67.3	196
627.cam4_s	48	<u>55.0</u>	<u>161</u>	54.9	161	55.1	161	48	55.2	161	<u>55.1</u>	<u>161</u>	55.0	161
628.pop2_s	48	127	93.7	<u>127</u>	<u>93.2</u>	127	93.1	48	127	93.7	<u>127</u>	<u>93.2</u>	127	93.1
638.imagick_s	48	25.1	575	24.7	584	<u>24.8</u>	<u>582</u>	48	25.1	575	24.7	584	<u>24.8</u>	<u>582</u>
644.nab_s	48	34.4	508	34.3	510	<u>34.3</u>	<u>509</u>	48	34.4	508	34.3	510	<u>34.3</u>	<u>509</u>
649.fotonik3d_s	48	<u>53.3</u>	<u>171</u>	53.3	171	53.4	171	48	<u>53.3</u>	<u>171</u>	53.3	171	53.4	171
654.roms_s	48	43.8	359	44.4	355	<u>44.2</u>	<u>356</u>	48	43.8	359	44.4	355	<u>44.2</u>	<u>356</u>

SPECspeed®2017_fp_base = 295

SPECspeed®2017_fp_peak = 295

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
IRQ balance service was stopped using "systemctl stop irqbalance.service"
tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"
perf-bias for all the CPUs is set using "cpupower set -b 0"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.60 GHz, Intel Xeon Gold 6442Y)

SPECspeed®2017_fp_base = 295

SPECspeed®2017_fp_peak = 295

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

Platform Notes

The system ROM used for this result contains Intel microcode version 0x2b000461 for the Intel Xeon Gold 6442Y Processor

BIOS Configuration:

Workload Profile set to General Peak Frequency Compute
 Thermal Configuration set to Maximum Cooling
 Intel Hyper-Threading set to Disabled
 Memory Patrol Scrubbing set to Disabled
 Last Level Cache (LLC) Prefetch set to Enabled
 Last Level Cache (LLC) Dead Line Allocation set to Disabled
 Enhanced Processor Performance Profile set to Aggressive
 Dead Block Predictor set to Enabled
 Workload Profile set to Custom
 Intel DMI Link Frequency set to Gen2 Speed
 Adjacent Sector Prefetch set to Disabled
 Minimum Processor Idle Power Package C-State set to No Package State

Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Fri Jun 16 05:21:46 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

 1. uname -a
 Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
 x86_64 x86_64 GNU/Linux

 2. w
 05:21:46 up 0 min, 0 users, load average: 0.07, 0.03, 0.01
 USER TTY LOGIN@ IDLE JCPU PCPU WHAT

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.60 GHz, Intel Xeon Gold 6442Y)

SPECspeed®2017_fp_base = 295

SPECspeed®2017_fp_peak = 295

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

3. Username

From environment variable \$USER: root

4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2062768
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2062768
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 28
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/fpspeed.sh
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=48 --tune base,peak -o all --define
drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=48 --tune base,peak --output_format all
--define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.004/templogs/preenv.fpspeed.004.0.log --lognum 004.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 6442Y
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 7
microcode      : 0x2b000461
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 24
siblings       : 24
2 physical ids (chips)
48 processors (hardware threads)
physical id 0: core ids 0-23
physical id 1: core ids 0-23
physical id 0: apicids 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.60 GHz, Intel Xeon Gold 6442Y)

SPECspeed®2017_fp_base = 295

SPECspeed®2017_fp_peak = 295

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 48
On-line CPU(s) list:   0-47
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             Intel(R) Xeon(R) Gold 6442Y
BIOS Model name:       Intel(R) Xeon(R) Gold 6442Y
CPU family:             6
Model:                  143
Thread(s) per core:    1
Core(s) per socket:    24
Socket(s):              2
Stepping:               7
BogoMIPS:               5200.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcdca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1
                        avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

L1d cache:             2.3 MiB (48 instances)
L1i cache:             1.5 MiB (48 instances)
L2 cache:              96 MiB (48 instances)
L3 cache:              120 MiB (2 instances)
NUMA node(s):         2
NUMA node0 CPU(s):    0-11,24-35
NUMA node1 CPU(s):    12-23,36-47
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:    Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.60 GHz, Intel Xeon Gold 6442Y)

SPECspeed®2017_fp_base = 295

SPECspeed®2017_fp_peak = 295

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

L1i	32K	1.5M	8 Instruction	1	64	1	64
L2	2M	96M	16 Unified	2	2048	1	64
L3	60M	120M	15 Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-11,24-35
node 0 size: 257700 MB
node 0 free: 256678 MB
node 1 cpus: 12-23,36-47
node 1 size: 258031 MB
node 1 free: 257548 MB
node distances:
node  0  1
  0: 10  20
  1: 20  10

```

9. /proc/meminfo

MemTotal: 528109568 kB

10. who -r

run-level 3 Jun 16 05:20

11. Systemd service manager version: systemd 250 (250-6.el9_0)

```

Default Target  Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE          UNIT FILES
enabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
                dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
                nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd
                systemd-network-generator tuned udisks2
enabled-runtime systemd-remount-fs
disabled       blk-availability chrony-wait chronyd console-getty cpupower debug-shell kvm_stat
                man-db-restart-cache-update nftables powertop rdisc rhsm rhsm-facts rpmdb-rebuild
                serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect       sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

```

14. cpupower frequency-info

```

analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.60 GHz, Intel Xeon Gold 6442Y)

SPECspeed®2017_fp_base = 295

SPECspeed®2017_fp_peak = 295

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

Active: yes

15. tuned-adm active
Current active profile: throughput-performance

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 40
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 10
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

17. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)

20. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 1.4T 160G 1.3T 12% /home

21. /sys/devices/virtual/dmi/id

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.60 GHz, Intel Xeon Gold 6442Y)

SPECspeed®2017_fp_base = 295

SPECspeed®2017_fp_peak = 295

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Platform Notes (Continued)

Vendor: HPE
Product: ProLiant DL380a Gen11
Product Family: ProLiant
Serial: CNX22602MZ

22. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

7x Hynix HMC888AEBRA168N 32 GB 2 rank 4800
6x Hynix HMC888MEBRA113N 32 GB 2 rank 4800
3x Hynix HMC888MEBRA115N 32 GB 2 rank 4800

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 1.40
BIOS Date: 06/01/2023
BIOS Revision: 1.40
Firmware Revision: 1.30

Compiler Version Notes

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.60 GHz, Intel Xeon Gold 6442Y)

SPECspeed®2017_fp_base = 295

SPECspeed®2017_fp_peak = 295

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.60 GHz, Intel Xeon Gold 6442Y)

SPECspeed®2017_fp_base = 295

SPECspeed®2017_fp_peak = 295

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int  
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte  
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.60 GHz, Intel Xeon Gold 6442Y)

SPECspeed®2017_fp_base = 295

SPECspeed®2017_fp_peak = 295

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jun-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

Peak Optimization Flags (Continued)

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

```
627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev2.1.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev2.1.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.60 GHz, Intel Xeon Gold 6442Y)

SPECspeed®2017_fp_base = 295

SPECspeed®2017_fp_peak = 295

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-15 19:51:45-0400.
Report generated on 2023-07-05 11:04:41 by CPU2017 PDF formatter v6716.
Originally published on 2023-07-04.