



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECspeed®2017\_fp\_base = 361

SPECspeed®2017\_fp\_peak = 361

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

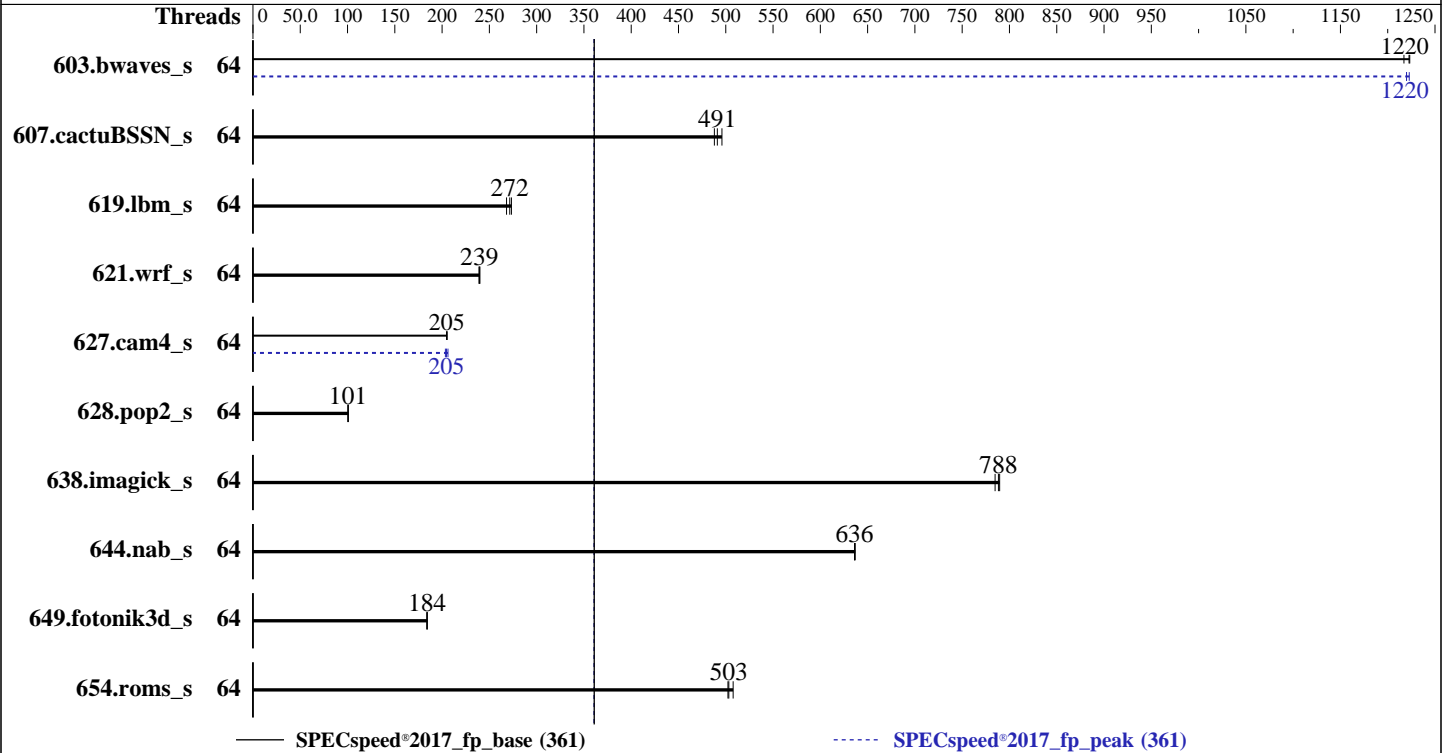

### Hardware

CPU Name: Intel Xeon Gold 6538Y+  
 Max MHz: 4000  
 Nominal: 2200  
 Enabled: 64 cores, 2 chips  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 60 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 5200)  
 Storage: 1 x 1.6 TB PCIe NVMe SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise High Performance Computing 15 SP5 (x86\_64)  
 Kernel 5.14.21-150500.53-default  
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: Version 2201 released Dec-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECspeed®2017\_fp\_base = 361

SPECspeed®2017\_fp\_peak = 361

CPU2017 License: 9016  
Test Sponsor: ASUSTeK Computer Inc.  
Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2024  
Hardware Availability: Dec-2023  
Software Availability: Mar-2024

### Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	48.5	1220	<b><u>48.3</u></b>	<b><u>1220</u></b>	48.2	1220	64	<b><u>48.4</u></b>	<b><u>1220</u></b>	48.2	1220	48.4	1220
607.cactuBSSN_s	64	<b><u>33.9</u></b>	<b><u>491</u></b>	34.2	488	33.6	496	64	<b><u>33.9</u></b>	<b><u>491</u></b>	34.2	488	33.6	496
619.lbm_s	64	19.2	273	19.5	268	<b><u>19.3</u></b>	<b><u>272</u></b>	64	19.2	273	19.5	268	<b><u>19.3</u></b>	<b><u>272</u></b>
621.wrf_s	64	<b><u>55.2</u></b>	<b><u>239</u></b>	55.3	239	55.1	240	64	<b><u>55.2</u></b>	<b><u>239</u></b>	55.3	239	55.1	240
627.cam4_s	64	<b><u>43.2</u></b>	<b><u>205</u></b>	43.3	205	43.2	205	64	43.0	206	<b><u>43.3</u></b>	<b><u>205</u></b>	43.6	204
628.pop2_s	64	118	100	118	101	<b><u>118</u></b>	<b><u>101</u></b>	64	118	100	118	101	<b><u>118</u></b>	<b><u>101</u></b>
638.imagick_s	64	18.3	790	<b><u>18.3</u></b>	<b><u>788</u></b>	18.4	785	64	18.3	790	<b><u>18.3</u></b>	<b><u>788</u></b>	18.4	785
644.nab_s	64	<b><u>27.5</u></b>	<b><u>636</u></b>	27.5	636	27.4	637	64	<b><u>27.5</u></b>	<b><u>636</u></b>	27.5	636	27.4	637
649.fotonik3d_s	64	<b><u>49.5</u></b>	<b><u>184</u></b>	49.5	184	49.6	184	64	<b><u>49.5</u></b>	<b><u>184</u></b>	49.5	184	49.6	184
654.roms_s	64	31.3	502	31.0	508	<b><u>31.3</u></b>	<b><u>503</u></b>	64	31.3	502	31.0	508	<b><u>31.3</u></b>	<b><u>503</u></b>

SPECspeed®2017\_fp\_base = **361**

SPECspeed®2017\_fp\_peak = **361**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via cpupower frequency-set -g performance

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/ic24u1/lib/intel64:/ic24u1/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

### General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECspeed®2017\_fp\_base = 361

SPECspeed®2017\_fp\_peak = 361

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

### Platform Notes

BIOS Configuration:  
VT-d = Disabled  
Hyper-Threading = Disable  
Patrol Scrub = Disabled  
LLC dead line allc = Disabled  
Engine Boost = Aggressive  
SR-IOV Support = Disabled  
BMC Configuration:  
Fan mode = Full speed mode

Sysinfo program /ic24ul/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Tue Jul 2 13:17:31 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----  
1. uname -a  
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT\_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)  
x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

-----  
2. w  
13:17:31 up 4:02, 1 user, load average: 47.64, 57.71, 58.52  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 09:16 4:00m 0.83s 0.00s /bin/bash ./speed.sh  
-----

-----  
3. Username  
From environment variable \$USER: root  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECspeed®2017\_fp\_base = 361

SPECspeed®2017\_fp\_peak = 361

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Mar-2024

### Platform Notes (Continued)

```

4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority     (-e) 0
   file size               (blocks, -f) unlimited
   pending signals        (-i) 4126910
   max locked memory      (kbytes, -l) 64
   max memory size        (kbytes, -m) unlimited
   open files              (-n) 1024
   pipe size               (512 bytes, -p) 8
   POSIX message queues   (bytes, -q) 819200
   real-time priority     (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time                (seconds, -t) unlimited
   max user processes     (-u) 4126910
   virtual memory         (kbytes, -v) unlimited
   file locks              (-x) unlimited

```

```

5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize 30
   login -- root
   -bash
   /bin/bash ./speed.sh
   /bin/bash ./speed.sh
   runcpu --nobuild --action validate --define default-platform-flags -c
     ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=64 --tune base,peak -o all --define
     drop_caches fpspeed
   runcpu --nobuild --action validate --define default-platform-flags --configfile
     ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=64 --tune base,peak --output_format all
     --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
     --note-preenv --logfile $SPEC/tmp/CPU2017.176/templogs/preenv.fpspeed.176.0.log --lognum 176.0
     --from_runcpu 2
   specperl $SPEC/bin/sysinfo
   $SPEC = /ic24ul

```

```

6. /proc/cpuinfo
   model name      : INTEL(R) XEON(R) GOLD 6538Y+
   vendor_id      : GenuineIntel
   cpu family     : 6
   model          : 207
   stepping       : 2
   microcode      : 0x21000200
   bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
   cpu cores      : 32
   siblings       : 32
   2 physical ids (chips)
   64 processors (hardware threads)
   physical id 0: core ids 0-31
   physical id 1: core ids 0-31
   physical id 0: apicids
   0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
   physical id 1: apicids
   128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
   80,182,184,186,188,190

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECspeed®2017\_fp\_base = 361

SPECspeed®2017\_fp\_peak = 361

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Mar-2024

### Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:   0-63
Vendor ID:             GenuineIntel
Model name:            INTEL(R) XEON(R) GOLD 6538Y+
CPU family:            6
Model:                 207
Thread(s) per core:    1
Core(s) per socket:    32
Socket(s):             2
Stepping:              2
CPU max MHz:           4000.0000
CPU min MHz:           800.0000
BogoMIPS:              4400.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vmni flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                        bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
                        hwp_act_window hwp_epp hwp_pkg_req hfi avx512vbmi umip pku ospke waitpkg
                        avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                        avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             3 MiB (64 instances)
L1i cache:             2 MiB (64 instances)
L2 cache:              128 MiB (64 instances)
L3 cache:              120 MiB (2 instances)
NUMA node(s):         2
NUMA node0 CPU(s):    0-31
NUMA node1 CPU(s):    32-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                        sequence
Vulnerability Srbds:    Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECspeed®2017\_fp\_base = 361

SPECspeed®2017\_fp\_peak = 361

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Mar-2024

### Platform Notes (Continued)

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-31
node 0 size: 515690 MB
node 0 free: 513336 MB
node 1 cpus: 32-63
node 1 size: 516066 MB
node 1 free: 515060 MB
node distances:
node  0  1
  0: 10  21
  1: 21  10

```

9. /proc/meminfo

MemTotal: 1056519924 kB

10. who -r

run-level 3 Jul 2 09:15

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged
                irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
                postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wickedd wickedd-auto4
                wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled       autofsd autofsd-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                firewallld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd
                issue-add-ssh-keys kexec-load lunmask man-db-create multipathd ndctl-monitor nfs
                nfs-blkmap nvme-fc-autoconnect rpcbind rpmconfigcheck rsyncd serial-getty@
                smartd_generate_opts snmpd snmptrapd svnservice systemd-boot-check-no-failures
                systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
indirect       udisks2 vncserver@
                wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=1821a225-9785-4821-9a33-99bd3ded8cae
splash=silent
mitigations=auto
quiet
security=apparmor

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECspeed®2017\_fp\_base = 361

SPECspeed®2017\_fp\_peak = 361

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2024

**Hardware Availability:** Dec-2023

**Software Availability:** Mar-2024

### Platform Notes (Continued)

```
-----
14. cpupower frequency-info
   analyzing CPU 0:
     current policy: frequency should be within 800 MHz and 4.00 GHz.
                   The governor "performance" may decide which speed to use
                   within this range.
   boost state support:
     Supported: yes
     Active: yes
-----
```

```
-----
15. tuned-adm active
   It seems that tuned daemon is not running, preset profile is not activated.
   Preset profile: latency-performance
-----
```

```
-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes     0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
-----
```

```
-----
19. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise High Performance Computing 15 SP5
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECspeed®2017\_fp\_base = 361

SPECspeed®2017\_fp\_peak = 361

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

### Platform Notes (Continued)

#### 20. Disk information

SPEC is set to: /ic24ul

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p8	xf	1.3T	109G	1.2T	9%	/

#### 21. /sys/devices/virtual/dmi/id

Vendor: ASUSTeK COMPUTER INC.  
 Product: RS720-E11-RS12U  
 Product Family: Server  
 Serial: R1SOMD000002

#### 22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M321R8GA0PB0-CWMXJ 64 GB 2 rank 5600, configured at 5200

#### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends Inc.  
 BIOS Version: 2201  
 BIOS Date: 12/22/2023  
 BIOS Revision: 22.1

### Compiler Version Notes

```
=====  
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```
=====  
C++, C, Fortran | 607.cactuBSSN_s(base, peak)  
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
 Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
 Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
 Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
 Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```
=====  
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)  
=====
```

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720-E11-RS12U  
(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECspeed®2017\_fp\_base = 361

SPECspeed®2017\_fp\_peak = 361

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

## Compiler Version Notes (Continued)

Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC\_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720-E11-RS12U  
(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECspeed®2017\_fp\_base = 361

SPECspeed®2017\_fp\_peak = 361

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECspeed®2017\_fp\_base = 361

SPECspeed®2017\_fp\_peak = 361

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

```
627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z13-V1.3.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z13-V1.3.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECspeed®2017\_fp\_base = 361

SPECspeed®2017\_fp\_peak = 361

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jul-2024

**Hardware Availability:** Dec-2023

**Software Availability:** Mar-2024

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-07-02 01:17:30-0400.  
Report generated on 2024-07-30 19:32:35 by CPU2017 PDF formatter v6716.  
Originally published on 2024-07-30.